

WINGITS® PREMIUM™

Stainless Steel Grab Bar

Model:
WGB6

Part Numbers:

WGB6SS12

12" Satin Finish

WGB6SS16

16" Satin Finish

WGB6SS18

18" Satin Finish

WGB6SS24

24" Satin Finish

WGB6SS30

30" Satin Finish

WGB6SS32

32" Satin Finish

WGB6SS36

36" Satin Finish

WGB6SS42

42" Satin Finish

WGB6SS48



48" Satin Finish



- All parts are Stainless Steel - tubing is 18-gauge (1.2mm)
- Mounting Flanges are 3" (75mm) in diameter, 3/32" (2.5mm) thick, HeliArc welded to the tubing. Mounting Flanges have 5 holes for attachment to WINGITS or adequate blocking.
- Snap-On Flange Covers are 22 gauge (0.8mm) drawn stainless steel, 3" (76mm) in diameter and 3/8" (10mm) in height.
- Provide 1-1/2" (38mm) clearance from wall.

MECHANICAL DATA
Width: See product part number for width. Complete length of Grab Bar is usable surface.
Diameter: 1.5" (3.8CM)
PRODUCT COMPOSITION
Entire product is stainless steel.
MODALITY
Use: Wall Installation.
Load Capability: 800 lbs (362.9kg)
INSTALLATION
WingIts® PREMIUM™ Structural Stainless Steel Grab Bars are designed to hold live loads and must be installed into adequate structural blocking or with WingIts® Grab Bar Fasteners
CERTIFICATIONS
WingIts® PREMIUM™ Structural Stainless Steel Grab Bars meet or exceed the applicable requirements of all building codes, ADA criteria, and 2010 ADAAG and 2009 ANSI standards.
RECOMMENDED INTEGRATION
For hollow wall construction, it is recommended that WingIts® Grab Bar Fasteners are used with this product. See Fastener instructions for applications.

WINGITS®

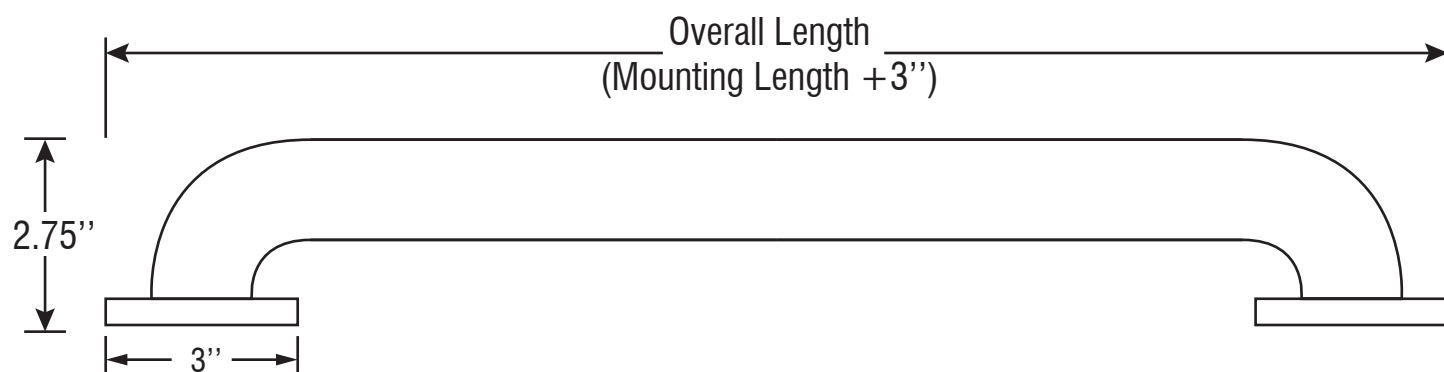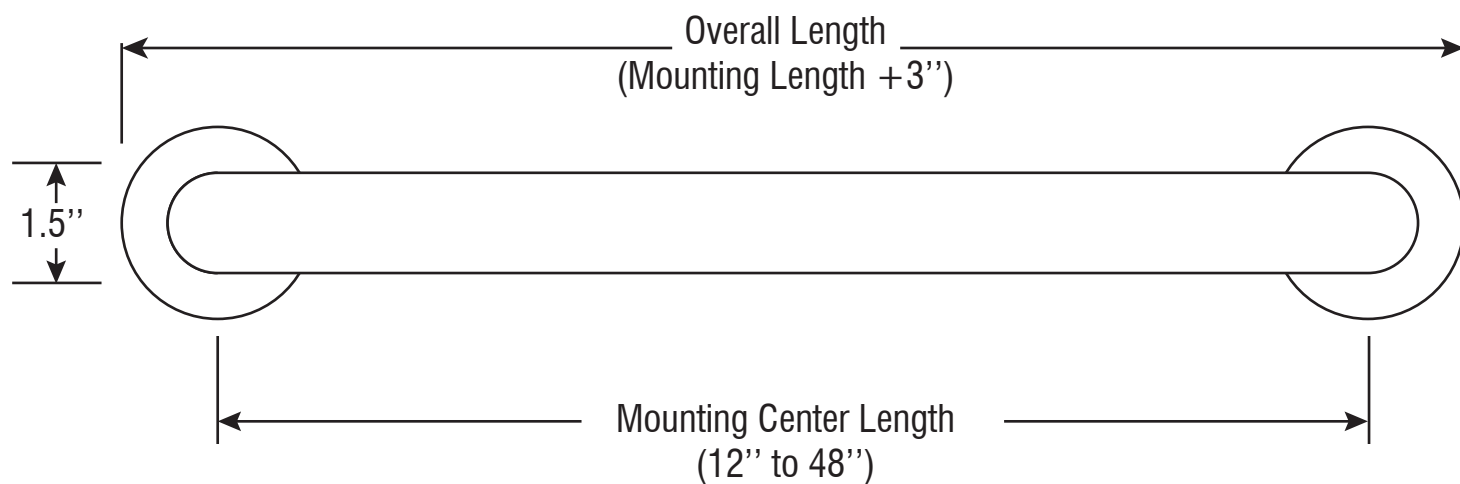

Holes - 1/4"
Slots - 1/4" x 1/2"
(used when installing with
the WINGITS® Grab Bar
Fastening System)

Bolt Circle is 2.3125"


**Grab Bar
Mounting Flange**

Grab Bar Tube



Wingits™

Snap-on Cover

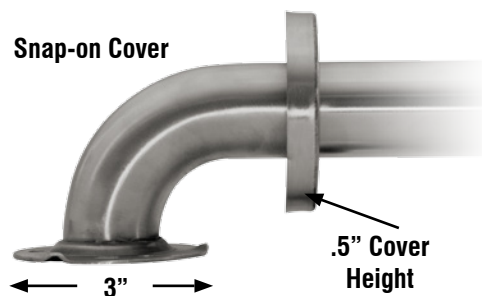

INCLUDED HARDWARE




Stainless Steel Screws x 6

OPTIONAL HARDWARE

(Sold Separately)



Grab Bar Wingits (GBW40) x 2



Reverse Grab Bar Wingits (SRGBW40) x 2



RES Wingits (RESGBW35) x 2