

Chiado II™ brings the subtlety of cement to new form in porcelain tile. Neutral tones result in a cool, contemporary surface to allow various applications and creative layouts.

CHIADO II™

Glazed Porcelain




FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 



Atolia



Jerome

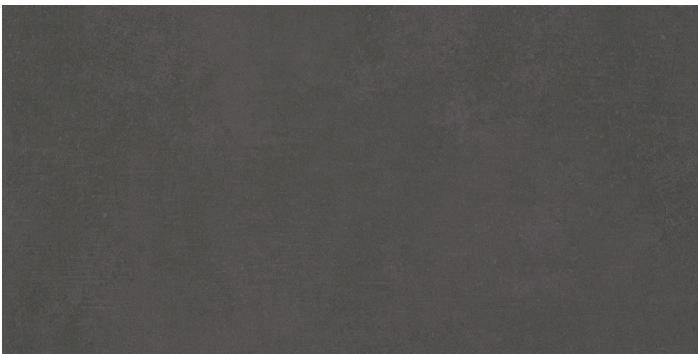

Loring




Mosaics



Atolia

Jerome

Loring

Sizes							
	12" x 24" 11.81" x 23.62"	12" x 12" Mesh 11.81" x 11.81"	3" x 12" Floor SBN				
Thickness	9mm	9.1mm	9mm				
Faces	12	N/A	N/A				
Finish	Matte	Matte	Matte				
Edge	Rectified	Cut	Cut/Rounded				
Grout Joint Recommendation	3/16"	3/16"	3/16"				
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
	III	>250 lbf	Resistant	<0.50%	>0.42	7	V3

Product and Installation Details | ANSI A108.02
Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free
- 0% Pre- and Post-Consumer

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.