FEDERAL SIGNAL

Model 350WB

# Vibratone® Horns with Weatherproof Back Box



Model 350WB Vibratone® Horn produces a loud tone by the electro-mechanical vibration of the diaphragm. The horn mechanism with diaphragm is attached to the grille. Indoor or outdoor use is made possible by the water- and dust-tight back box.

Model 350WB features a diecast aluminum rear housing sealed with a gray, enamel finish. The rugged outer housing resists vandalism without reducing sound output. Model 350WB is fused and utilizes a terminal block connection.


Vibratone horns are excellent for general alarm, start/dismissal, coded paging, and process control signaling in areas where their sound output exceeds ambient noise levels. Compact size and various installation options make them ideal for institutional use.

## FEATURES

- Available in 120 Vac and 240 Vac
- Coded or sustained tones
- Wall mount
- Produces 100 dBa at 10' (110 dBa at 1 m)
- Fuse terminal block provided for field wiring
- Indoor/outdoor use
- Type 4X, IP65 enclosure
- IP69K compliant
- UL and cUL Listed
- CSA Certified

| MODEL | VOLTAGE | OPERATING CURRENT | DECIBELS 10' | DECIBELS 1m |
|---|---|---|---|---|
| **350WB-120** | 120 Vac 50/60 Hz | 0.22 A | 100 | 110 |
| **350WB-240** | 240 Vac 50/60 Hz | 0.09 A | 100 | 110 |

# Vibratone® Horns with Weatherproof Back Box (350WB)

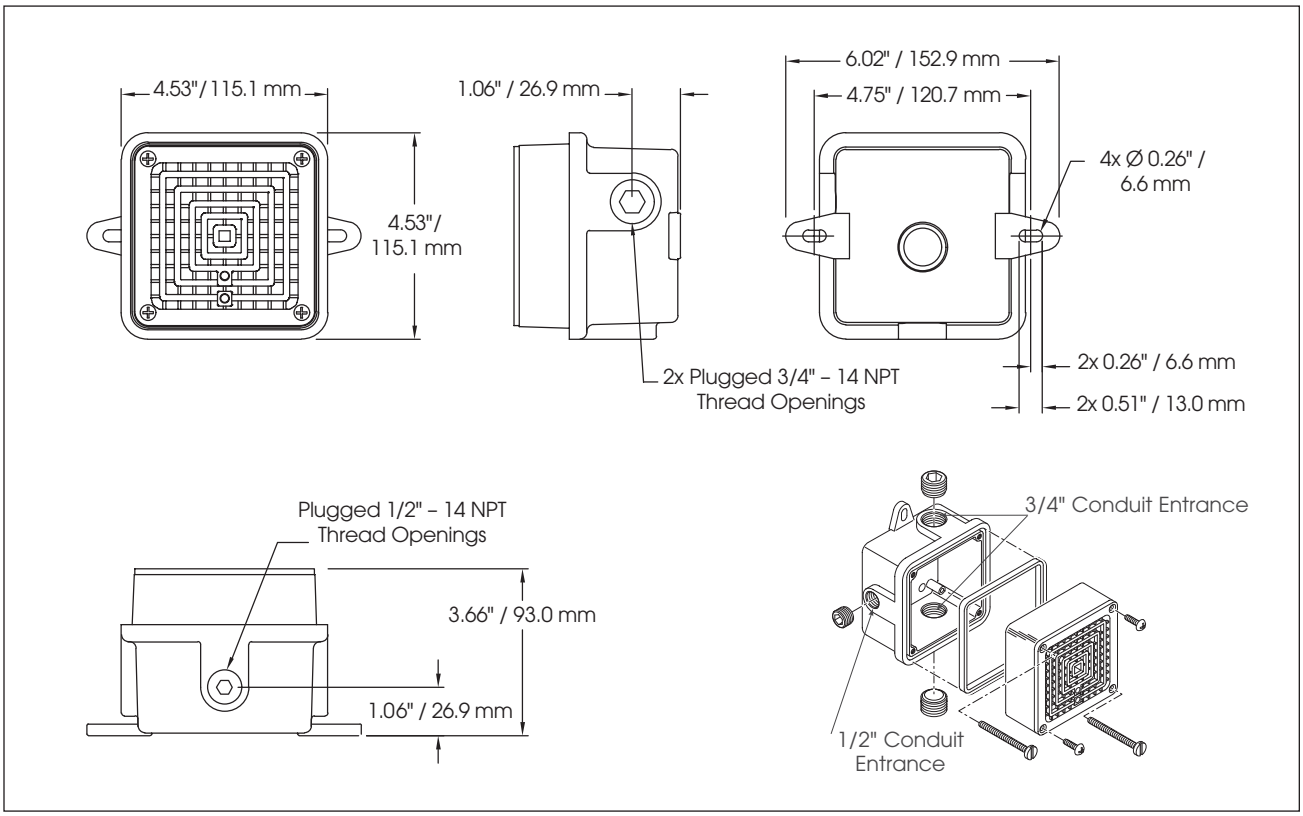


## SPECIFICATIONS

| | |
|---|---|
| Operating Temperature: | -65° to 150°F (-54° to 66°C) |
| Duty Cycle: | 5 minutes ON/5 minutes OFF |
| Net Weight: | 2.7 lb (1.2 kg) |
| Shipping Weight: | 2.8 lb (1.2 kg) |
| Height: | 4.53 in (115.1 mm) |
| Width: | 4.53 in (115.1 mm) |
| Depth: | 3.66 in (93.0 mm) |

## REPLACEMENT PARTS

| Description | Part Number |
|---|---|
| Volume Control Kit | **K8435663B** |
| Coil, 120 Vac | **KFC1516C** |

## HOW TO ORDER

**350WB** – **120**

**TYPE**
**350WB**

**VOLTAGE**
**120** (120 Vac)
**240** (240 Vac)

## ACCESSORIES

| Description | Part Number |
|---|---|
| Non-metallic double projector directs sounds to both sides when attached to 350/450E models; ideal for use in hallways; 4" H x 11-1/2" W x 4" D; shipping weight 1 lb (0.45 kg) | **PR2-NM** |
| Electro-Mechanical Rotational Mounting Kit | **EM-KIT-RS** |



**PR2-NM**