

EML2

LED Compact Emergency Light

Product Description

This LED thermoplastic emergency lighting unit offers a compact design in an affordable package. The EML2 Series is available in white and offers universal mounting with testing button and a damp location listing. Each head generates only 1.2 watts of energy, making the EML2 Series a nice complement to any design.

Construction

- Injection molded thermoplastic ABS housing
- UL-94V-0 flame rating - Flame Retardant

Electrical

- 1.2 Watts per head
- 120-277V Dual Voltage Operation
- LED Indicator Light & Push Button Test Switch
- 90 Min capacity on emergency mode
- Damp Location Rated (0°C - 40°C)

Installation

- Universal mounting plate with EZ quick connect

PRODUCT INFORMATION



Input Voltage (V):	120-277
Power Draw (W):	2.4
Emergency Battery:	90 minutes
Lumen Output:	162Lm
Warranty:	1-year limited system warranty standard

Project _____

Catalog _____

Type _____

Date _____

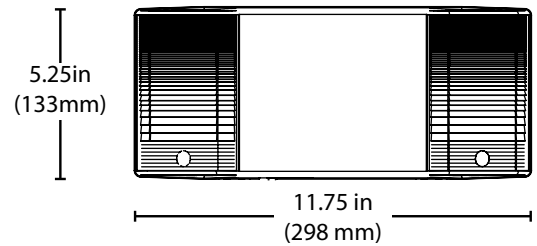

Ordering Information

Example: EML2-10-UNV-WH

Series	Version	Voltage	Housing Color
EML2	10 (1.0)	UNV (120-277V)	WH (white)