






## SOCORRO 4 & 6 LIGHT CHANDELIER

3124904, 3124906, 3224906

### General Product Information



WARRANTY



FCC STATEMENT

### Tools Required



PHILLIPS-HEAD SCREWDRIVER

### Safety Information

#### CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



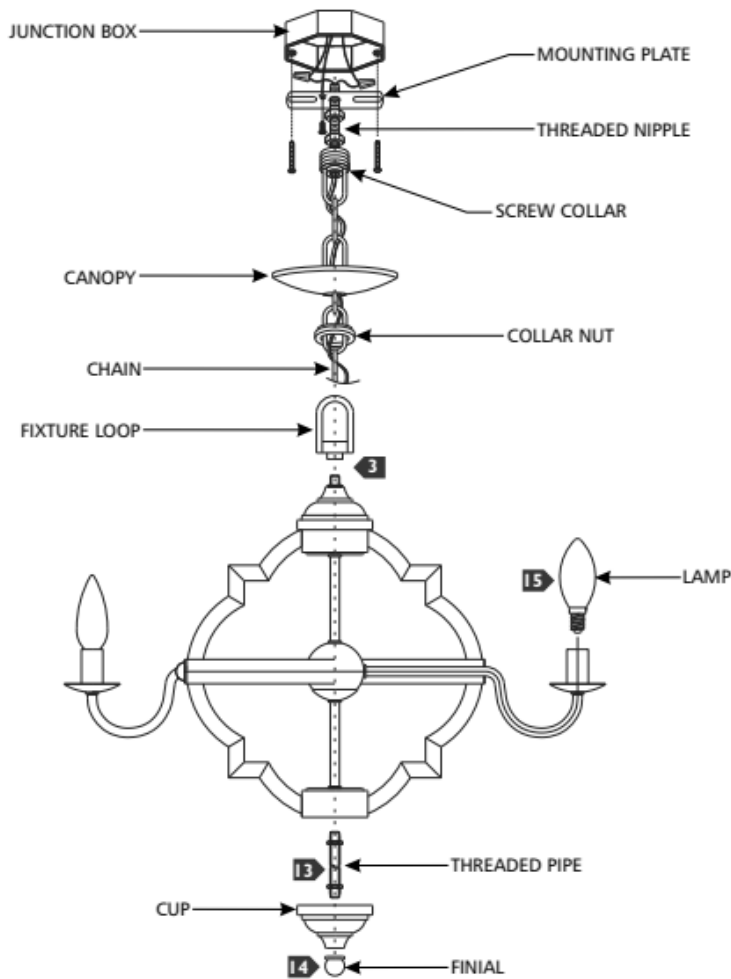

## INSTRUCTIONS

### I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Feed the cord through the fixture loop, then screw the fixture loop to the fixture.
4. Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
5. Open the chain link with pliers and install the chain on the fixture loop. Re-close the chain link.
6. Unscrew the collar nut from the screw collar. Install the collar nut and the canopy onto the chain.
7. Open a link on the other end of the chain with pliers and install the chain onto the screw collar to secure the fixture. Re-close the link with pliers.
8. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).

3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire
4. Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
5. Screw the threaded pipe to the bottom of the fixture.
6. Place the cup over the threaded pipe and secure it in place by screwing the finial to the threaded pipe.
7. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage information.