


DATASHEET C12S

C12S BLK/C12S WHT

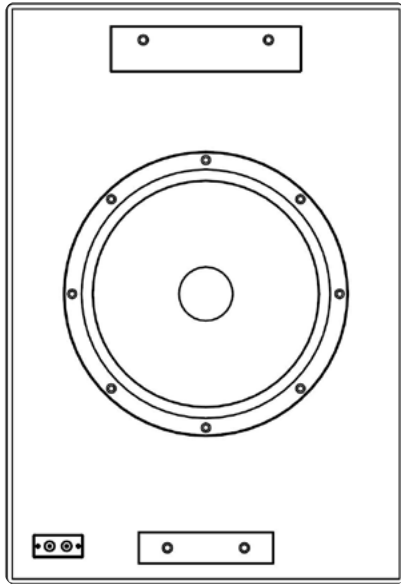

Description

The C12S is a shallow subwoofer designed for applications requiring strong output in a discreet form factor. Designed for indoor use and medium SPL applications, the MDF cabinet features an advanced 12" woofer with a very efficient motor design and a carbon fibre reinforced cone.

The 75 mm voice coil employs a high strength fibreglass former with windings both on the outer and inner surface of the coil. The result is a balanced voice coil with uniform drive and very low distortion.

Cooling channels in the chassis ensure low power compression and excellent dynamics. The cabinet can hang on the wall or stand on the floor, with the subwoofer being protected from the surroundings. Cables are connected to the screw terminal allowing for up to 4 sq. mm cable thickness which can be recessed from the loudspeakers backside into the front of the cabinet.

C12S is available in black and white and is a powerful yet discreet subwoofer for commercial installation, and can be used together with the Ci and CBL loudspeaker series by Blaze Audio.


FEATURES

12" shallow long throw subwoofer
Bass reflex design
For on-wall or on-floor applications
Painted 18 mm MDF cabinet
Heavy duty screw terminals

COLOURS



DATA



Sensitivity SPL / 1W @ 1m:	95 dB
Maximum SPL, Long Term:	120 dB
Maximum SPL, Peak:	126 dB
Frequency response:	45-600 Hz
Nominal impedance:	8 Ω
Ingress Protection:	Indoor use only
Recommended amplifier:	300-600 W into 8 Ω
Measurements with wall mount:	649 x 445 x 220 mm (25.55 x 17.58 x 8.66 in)
Weight:	23 kg (50.71 lb)
Colour:	Matt White (RAL9016) Matt Black (RAL790-5)

DATASHEET C12S

Architectural Specifications

The loudspeaker system shall be an on-wall subwoofer based on reflective design. It shall feature a 12" woofer with a 3" voice coil. The cabinet shall be made in 18 mm MDF with either RAL9016 white or black RAL790-5 paint.

Performance specifications of a typical production shall be as follows:

Sensitivity SPL / 1W @ 1m shall be at least 95 dB. Nominal impedance shall be 8 ohm, with minimum impedance being 6.5 ohm @ 235 Hz. Recommended amplifier shall be 300-600 W into 8 Ω . Frequency response shall be from 45-600 Hz +/- 3 dB.

The enclosure shall be rectangular in shape with no visible cable terminals and no visible drive units when mounted on the wall. It shall be manufactured in MDF, incorporating integrated wall mounting system which also serve as feet.

Outside dimensions shall be no greater than 649 mm (height) x 445 mm (width) x 220 mm (depth including wall mount) and weight shall be 23 kg.

The loudspeaker system shall be the C12S by Blaze Audio.