

electronic touch controls • climatekeeper™ system • 2003 merchandising • integrated ice™ system • customcool™ technology

GE Profile™ and GE® CustomStyle™ Refrigerators

Built-in appearance. Outstanding performance.
The Ultimate in Refrigeration.™

imagination at work

The Ultimate in Refrigeration.™

If you want a built-in look, without the built-in expense, GE offers a couple of **fitting solutions**. A GE Profile™ or new GE® CustomStyle™ refrigerator **makes the most of your kitchen space** by blending in almost seamlessly with surrounding cabinetry. It **gives you the style you want** and features you need, without the cost and inconvenience of a kitchen redo. For a sleek, **modern appearance**, choose stainless or acrylic panels. Or, achieve a **custom look** with cabinet-matching wood panels. Whatever style you prefer, you'll find a CustomStyle refrigerator that **works beautifully with your décor and budget.**


Standard Side-by-Side


CustomStyle Side-by-Side

GE Profile CustomStyle™ side-by-side refrigerators make an impressive design statement, without standing out.
CustomStyle side-by-side models are the perfect solution for today's open-living kitchen designs. They extend only 26 3/4" from the wall, saving more than six inches of floor space.


Standard Top-Freezer


CustomStyle Top-Freezer

GE Profile CustomStyle™ top-freezers are sleek outside, yet spacious inside.
CustomStyle top-freezers offer a built-in appearance, along with optimal ease and accessibility. They extend only 26" from the wall for a truly integrated look.





GE Profile Arctica CustomStyle™ Side-By-Side Refrigerators

A look that opens up space. And possibilities.

GE Profile CustomStyle™ side-by-side refrigerators offer a beautiful, built-in look that saves more than six inches of floor space. Designed to align nearly flush with surrounding counters and cabinetry, these refrigerators integrate smoothly with any decorating scheme. Simply choose the style and panels that best fit your kitchen and budget.



Installed trim side-by-side models

Designed for today's discriminating consumers.

CustomStyle refrigerators with installed trim accept stainless steel or acrylic panels in white, black or bisque, all of which can be ordered from GE. To achieve a custom look, you can order wood panels from your cabinetmaker. You'll discover all kinds of ways to enhance your kitchen.



Optional Panels
Choose stainless steel panels or acrylic panels in white, bisque or black.



Custom Wood Panels
Make and install your own custom wood panels to accent cabinetry.

Optional collar trim: adding the final touch.

The optional collar trim is just another way GE lets you integrate our CustomStyle refrigerators into your kitchen décor. Available in stainless steel, white, bisque and black, this trim frames the refrigerator facade, adding to the finished look of a built-in, custom kitchen.

Collar Trim

Model No.	Black Collar Trim	White Collar Trim	Bisque Collar Trim	Stainless Steel Collar Trim
PSI23NCP	TRMBISBB	TRMBISWW	TRMBISCC	TRMBISSS
PSI23SCP	TRMBISBB	TRMBISWW	TRMBISCC	TRMBISSS
PSI23MGP	TRMBISBB	TRMBISWW	TRMBISCC	TRMBISSS
PSI23NGP	TRMBISBB	TRMBISWW	TRMBISCC	TRMBISSS
PSH23NGP	TRMBISBB	TRMBISWW	TRMBISCC	TRMBISSS
PSI23SGP	TRMBISBB	TRMBISWW	TRMBISCC	TRMBISSS
PSH23SGP	TRMBISBB	TRMBISWW	TRMBISCC	TRMBISSS

Acrylic and Stainless Steel Panels

Model No.	Black Acrylic Panels	White Acrylic Panels	Bisque Acrylic Panels	Stainless Steel Panels
PSI23NCP	PSPK23CBB	PSPK23CWW	PSPK23CCC	–
PSI23MGP	PSPK23DBB	PSPK23DWW	PSPK23DCC	PSPK23DSS
PSI23NGP	PSPK23DBB	PSPK23DWW	PSPK23DCC	PSPK23DSS
PSH23NGP	PSPK23DBB	PSPK23DWW	PSPK23DCC	PSPK23DSS

Trimless side-by-side models

Installation made easy, simply slide in.

Trimless CustomStyle units install by simply sliding into—way into—the space between cabinets. They align with counters, instantly look built-in, with nothing to attach or build. (Available in stainless steel, white, bisque and black.)



Installed trim side-by-side models

Dispenser Models



PSI23NGP
Shown with optional black acrylic panels. Available in white, bisque or black.



PSI23NGP
Shown with custom wood panels. Available in white, bisque or black.

ENERGY STAR®-qualified model PSH23NGP is available with the same styling and features.



PSI23MGP
Shown with optional white acrylic panels. Available in white, bisque or black.



PSI23MGP
Shown with custom wood panels. Available in white, bisque or black.

Non-Dispenser Models



PSI23NCP
Shown with optional white acrylic panels. Available in white, bisque or black.



PSI23NCP
Shown with custom wood panels. Available in white bisque, or black.

Trimless side-by-side models

Dispenser Models



PSC23SHP
Stainless steel with sculptured stainless-look handles.



PSC23NHP
Available in white, bisque or black.



PSC23SGP
Stainless steel with sculptured stainless-look handles.



PSC23NGP
Available in white, bisque or black.



PSI23SGP
Stainless steel with full-length visor handles.

ENERGY STAR®-qualified model
PSH23SGP is available with the same styling and features.



PSC23MGP
Available in white, bisque or black.

Non-Dispenser Model



PSI23SCP
Stainless steel with full-length visor handles.

Feature Gallery—GE Profile Arctica CustomStyle™ Side-by-Sides



ONLY GE HAS IT!

ClimateKeeper™ system

Combines electronic touch controls, multiple electronic sensors and a multiflow air system to keep temperatures consistent and help preserve foods. The Best Temperature Management System you can buy!



ONLY GE HAS IT!

Integrated Ice™ system

The ice bucket is integrated into the icemaker, not the freezer door, freeing up valuable storage space. Tilt-down feature provides easy access to cubed ice.



QuickSpace™ shelf

Quickly slides out of the way to make room for tall items.



ONLY GE HAS IT!

Slide 'n Store™ full-extension freezer baskets

Extends 16" for easy loading and unloading.





ONLY GE HAS IT!

Full-extension bin with CustomCool™ technology

Chills in minutes, thaws in hours and helps keep foods fresher, longer. For added convenience, it opens fully to allow easy access. (Limited lifetime warranty* on slides)

*See written warranty for details.



ONLY GE HAS IT!

Upfront electronic controls with digital temperature readout

Are precise and easy to use. Takes the guesswork out of selecting accurate temperatures.



TurboCool™ feature

Quickly cools the refrigerator after frequent door openings or when hot items are placed inside.



In-the-door beverage rack

Conveniently located inside the refrigerator door to increase flexibility and free up valuable shelf space.



Adjustable ClearLook™ bins

Hold gallon-size containers with style and ease, freeing up valuable shelf space.



Slide-out, spillproof glass shelves

Simplify loading, unloading and cleaning.





Tall LightTouch! dispenser

Accommodates tall glassware and dispenses water and ice at the slightest touch.



SmartWater™ Plus filtration system

Delivers clean, great-tasting water and ice through the LightTouch! dispenser.



The quietest refrigerator you ever owned…guaranteed!*

Premium quiet design—GE's most advanced sound control system.

*Applies to models PSH23SGP and PSH23NGP only.

Introducing GE CustomStyle™ Refrigerators.

New GE CustomStyle refrigerators **set your kitchen apart**, without standing out. Installed alongside counters or between cabinets, these refrigerators offer a stunning look that **enhances your décor** and **saves floor space**. Simply choose the style that best fits your style and budget: **stainless steel** with tubular handles, **white** or **black**.



GSC23LSQSS
Stainless steel with tubular handles



GSC23LGQWW
White on white



GSC23LGQBB
Black on black

Trimless side-by-side models

Installation made easy, simply slide in.

Trimless CustomStyle units install by simply sliding into—way into—the space between cabinets. They align with counters, instantly look built-in, with nothing to attach or build. (Available in stainless steel, white and black.)

Feature Gallery—GE CustomStyle Side-by-Sides



GSC23LSQ shown

TurboCool™ feature

Quickly cools the refrigerator after frequent door openings or when hot items are placed inside.

Upfront electronic touch temperature controls

Are easy to see and to set.



QuickSpace™ shelf

Quickly slides out of the way to make room for tall items.




ClearLook™ adjustable gallon door bins

Provides maximum storage flexibility.



ONLY GE HAS IT!



FrostGuard™ technology

Reduces freezer burn, so foods retain their texture and flavor.

ONLY GE HAS IT!



Integrated Ice™ system

The ice bucket is integrated into the icemaker, not the freezer door, freeing up valuable storage space. Tilt-down feature provides easy access to cubed ice.

GE Profile CustomStyle™ Top-Freezer Refrigerators

The perfect fit for your kitchen and your lifestyle.

GE Profile CustomStyle™ top-freezer refrigerators fit your kitchen—and the way you live. These sleek, stylish refrigerators install nearly flush with adjacent counters and cabinetry, saving nearly five inches of floor space. Make a dramatic statement with stainless steel or acrylic color panels. Or, opt for a soft, subtle look with cabinet-matching wood panels. That's the beauty of CustomStyle. The choice is yours.





Installed trim top-freezer models

Designed for today's discriminating consumers.

CustomStyle refrigerators with installed trim accept stainless steel or acrylic panels in white or black, all of which can be ordered from GE. To achieve a custom look, you can order wood panels from your cabinetmaker. You'll discover all kinds of ways to enhance your kitchen.



Optional Panels
Choose stainless steel panels or acrylic panels in white or black.



Custom Wood Panels
Make and install your own custom wood panels to accent cabinetry.

Optional collar trim: adding the final touch.

The optional collar trim is just another way GE lets you integrate our CustomStyle refrigerators into your kitchen decor. Available in stainless steel, white and black, this trim frames the refrigerator facade, adding to the finished look of a built-in, custom kitchen.

Acrylic Panels and Trim

Model No.	Black Acrylic Panels	White Acrylic Panels	Stainless Steel Panels	Black Collar Trim	White Collar Trim	Stainless Steel Trim
PTI22MBP	PTPK22CBB	PTPK22CWW	PTPK22CSS	TRMBISBB	TRMBISWW	TRMBISSS
PTI22MFP	PTPK22DBB	PTPK22DWW	PTPK22DSS	TRMBISBB	TRMBISWW	TRMBISSS

Trimless top-freezer models

Installation made easy, simply slide in.

Trimless CustomStyle units install by simply sliding into—way into—the space between cabinets. They align with counters, instantly look built-in, with nothing to attach or build. (Available in stainless steel, white, bisque and black.)



Installed trim top-freezer models

Dispenser Models



PTI22SFM
Shown with installed stainless steel panels.



PTI22MFM
Shown with optional white acrylic panels. Available in white or black.



PTI22MFM
Shown with optional stainless steel panels. Available in white or black.



PTI22MFM
Shown with custom wood panels. Available in white or black.

Non-Dispenser Models



PTI22MBM
Shown with optional black acrylic panels. Available in white or black.



PTI22MBM
Shown with optional stainless steel panels. Available in white or black.



PTI22MBM
Shown with custom wood panels. Available in white or black.

Trimless top-freezer models

Dispenser Models



PTC22SFM
Stainless steel.



PTC22MFM
Available in white, bisque or black.

Non-Dispenser Models



PTC22SBM
Stainless steel.



PTC22MBM
Available in white or black.

Feature Gallery—Top-Freezers



GE SmartWater™ filtration system

Provides clean, better-tasting water and ice through the LightTouch! dispenser.



Slide-out, spillproof glass shelves

Simplify loading, unloading and cleaning.



Adjustable temperature meat pan

Provides a convenient, temperature-controlled place for meats, cheeses and other favorite foods.



NeverClean™ Condenser

Condenser coils are encased and don't require cleaning in normal operating environments.





Upfront illuminated temperature controls

Easy to see and set.



QuickSpace™ shelf

Slides back to store tall items.



Adjustable ClearLook™ gallon door bins

Hold large containers with style and ease.



Adjustable-humidity crispers

Provide the ideal storage environment for fruits and vegetables.





LightTouch! dispenser

Delivers cubes, crushed ice and chilled water.

ENERGY STAR®-qualified

Higher energy efficiency means lower utility bills.

PTI22SFM PTI22MFM
PTC22SFM PTC22MFM


GE Profile Arctica and GE® CustomStyle™ Side-By-Side Installation Information and Specifications


Rough-In Dimensions

Standard, New Construction and Replacement Installation

Installation Tips to Maximize the Built-In Look


- All wall/floor molding should be removed prior to installation.
- Water recess on rear wall recommended to prevent water line damage. 48" minimum length 1/4" diameter water line tubing recommended.
- When possible, recess both copper water line and electrical outlet. (See local codes)
- Front and rear leveling legs are adjustable for the built-in look. (See owner's manual)
- If optional collar trim kit is to be used or anticipated, see collar trim installation on next page for different rough-in dimensions.

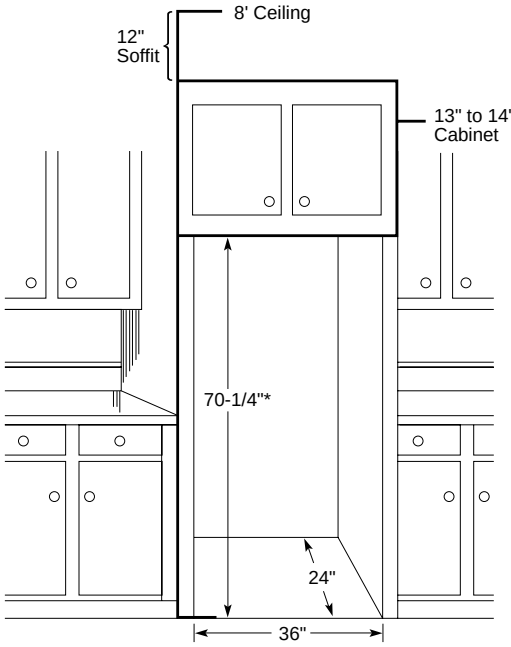

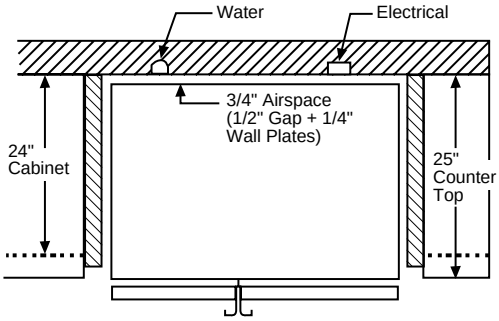


*The rough-in dimension of 70-1/4" is minimum and is measured from the finished floor to top of opening (or the underside of the overhead cabinets). For Models with Trim Kit: If frameless style cabinets are planned for above the refrigerator, you may need to consider adding a maximum of 1/4" (70-1/2") to height of opening to allow additional clearance between cabinet doors and top of refrigerator trim when cabinet doors are in open position.

Installation of Water Outlets

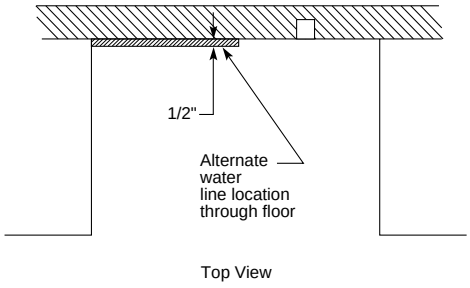

Top View

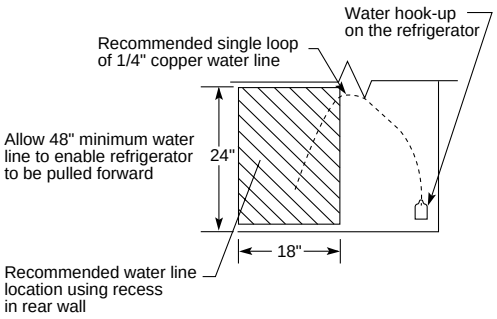


Rear Wall View

IMPORTANT: Before finalizing specifications for your GE Profile CustomStyle Refrigerator, please NOTE:

- A minimum of 36" is required for refrigerator installation
- Be sure to allow for 1/2" or 3/4" side panels in addition to the 36" minimum

Create a Custom Look for Your GE Profile CustomStyle Side-By-Side Refrigerator

Still another advantage offered by GE Profile CustomStyle Refrigerators is ease of installation. For a refrigerator that does so much to enhance the beauty of your kitchen, the "behind-the-scenes" preparation and installation are surprisingly simple.

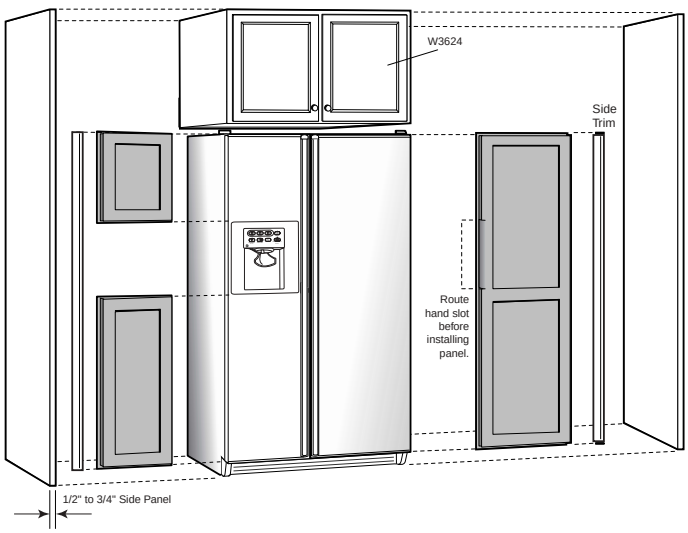

Fabricating the Enclosure


- The drawing shows an 84" cabinet elevation. Adjust dimensions accordingly for other cabinet elevations.
- Cabinet pieces to order: (2) side panels and (1) wall cabinet.
- Side panels will typically be attached to adjacent cabinets and/or cleated to rear wall and floor.
- Refer to GE refrigerator installation instructions for proper plumbing, and electrical and air clearances.
- (1) Some framed cabinet lines will make a refrigerator enclosure with a cabinet 12" high x 39" wide with sides and 1-1/2" face frame extended down to floor to create the refrigerator space. This will replace the above construction.
  (2) A tall cabinet on either side of the refrigerator can replace a side panel!
- Counter overhangs on either side of the refrigerator should have clipped corners to allow for full door swing.
- If the refrigerator has a wall returning beyond the front of the refrigerator on either side, a 2" tall filler will help to allow for movement of the door.

Door Panels


- See drawings for exact dimensions of the fresh-food and freezer door panels.
- Refrigerator door fronts from stock and most semi-custom cabinet manufacturers will be supplied as 1/4"-thick panels cut to dimensions, with closest available standard door sizes applied to front.
  –This will leave a "reveal" at top/bottom and sides. Width of "reveal" will depend on manufacturer's standard door sizes.
  –Door will be affixed on the 1/4" panels at factory or in the field by the local supplier, depending on manufacturer.
- Local shop-built or custom cabinet supplier may fabricate custom 3/4" panels. In this case, edges must be routed.
- Follow notes on drawing to assure room for fingers/hands to open handles.

Door Panel Dimensions


Freezer Panel without Dispenser

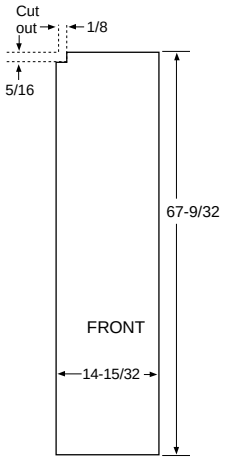

Freezer Panel with Dispenser

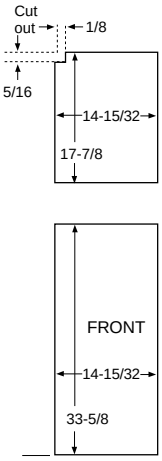

Fresh Food Panel

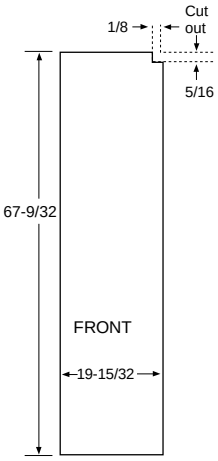


Order your own custom wood panels to match cabinetry or other decor.

Panels up to 1/4" thick will fit door frame with no special preparation. Add filler behind material thinner than 1/4" for proper fit.


Weight Limits: Total weight of panels (i.e., both freezer panels)— Fresh Food = 38 lbs., Freezer = 28 lbs.

Note: Panels up to 3/4" will require special routing area around handles. Dimensions may vary depending on depth of panel.

Detail C




(Fresh Food panel shown)
Notch required at top corner as noted.





Collar Trim Installation


An enclosure is **required** to match up to the trim, see Typical Installation. To obtain the most integrated look, the cabinet or soffit above the refrigerator should extend out to the same depth as the side panels. The refrigerator opening must have minimum dimensions of 70-1/4" high x 36-1/8" wide x 24-1/2" deep as shown at right. If there is an overhead cabinet, allow 1" for cabinet door clearance with the top trim piece so the cabinet doors can be opened without hitting the top trim. If 1/2" side panels are used, then side trim and panel will be even. If 3/4" side panels are used, then some of the side panel will extend beyond the trim and must be finished.

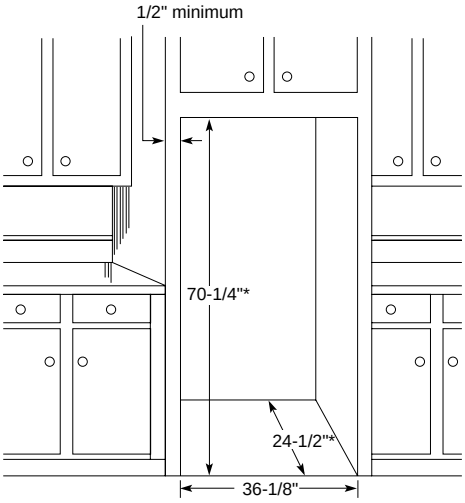

*The rough-in dimension of 70-1/4" is minimum and is measured from the finished floor to top of opening (or the underside of the overhead cabinets). For Models with Trim Kit: If frameless style cabinets are planned for above the refrigerator, you may need to consider adding a maximum of 1/4" (70-1/2") to height of opening to allow additional clearance between cabinet doors and top of refrigerator trim when cabinet doors are in open position.

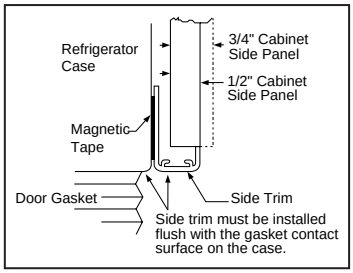



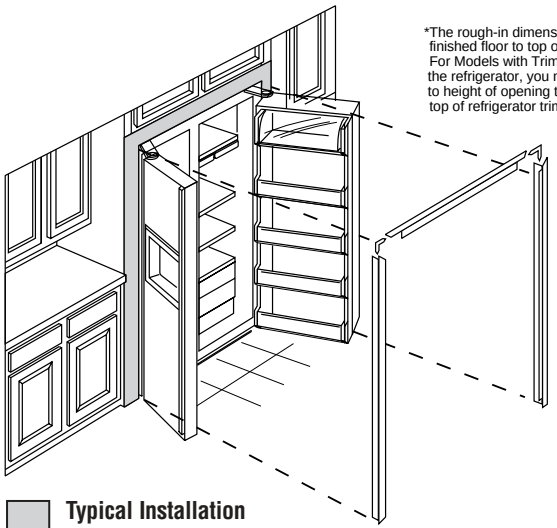

Typical Installation

Shaded areas represent front surfaces of side panels and overhead cabinet or soffit that contacts trim.

IMPORTANT: Before finalizing specifications for your GE Profile CustomStyle Refrigerator, please NOTE:
- A minimum of 36-1/8" is required for refrigerator installation with collar
- Be sure to allow for 1/2" or 3/4" side panels in addition to the 36-1/8" minimum


GE Profile CustomStyle™ Top-Freezer Installation Information and Specifications

Rough-In Dimensions

Standard, New Construction and Replacement Installation


Installation Tips to Maximize the Built-In Look

- All wall/floor molding should be removed prior to installation.
- Water recess on rear wall recommended to prevent water line damage. 48" minimum length 1/4" diameter water line tubing recommended.
- When possible, recess both copper water line and electrical outlet. (See local codes)
- Front and rear leveling legs are adjustable for the built-in look. (See owner's manual)

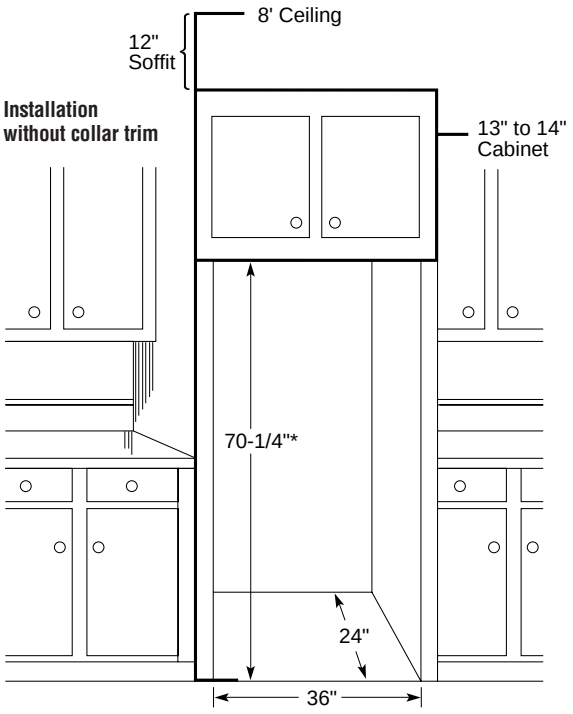

For 22 cu. ft. models only.

*22" depth applies to the refrigerator opening, not the actual cabinet depth.

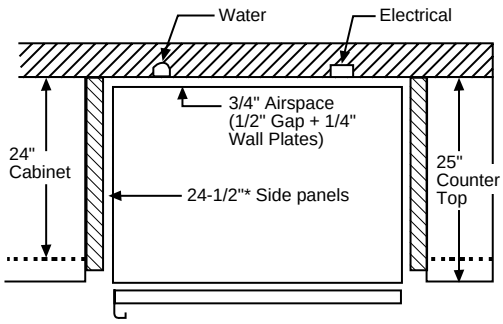

*The rough-in dimension of 70-1/4" is minimum and is measured from the finished floor to top of opening (or the underside of the overhead cabinets). For Models with Trim Kit: If frameless style cabinets are planned for above the refrigerator, you may need to consider adding a maximum of 1/4" (70-1/2") to height of opening to allow additional clearance between cabinet doors and top of refrigerator trim when cabinet doors are in open position.

Create a Custom Look for Your GE Profile CustomStyle Top-Freezer Refrigerator

Still another advantage offered by GE Profile CustomStyle Refrigerators is ease of installation. For a refrigerator that does so much to enhance the beauty of your kitchen, the "behind-the-scenes" preparation and installation are surprisingly simple.

Door Panel Dimensions

Order your own custom wood panels to match cabinetry or other decor.

	Fresh Food Panels	Freezer Panel Without Dispenser	Freezer Panel With Dispenser
	B-42-1/4"	**A**-24-1/16"	**D**-24-1/16"
22 cu. ft.	**C**-35-3/4"	**C**-35-3/4"	**C**-35-3/4"

Panels up to 1/4" thick will fit door frame with no special preparation.
Add filler behind material thinner than 1/4" for proper fit.

Note: Panels up to 3/4" will require special routing area around handles.
Dimensions may vary depending on depth of panel.

Handle Side Clearance

- At least 2-5/8" (67mm) on the handle side for fingertip clearances.

Top and Bottom Clearance


- At least 3/16" (4.75mm) at the top and bottom edges to allow for trim flange.

Hinge Side Clearance

- A 3/4" (19mm) thick door panel may strike the adjacent countertops when the door is fully opened. Therefore, the hinge side clearance to raised panel will vary according to the installation situation.
  –Allow 1-3/4" (44mm) clearance when installation does not include side panels.
  –The installation of 3/4" (19mm) thick side panels requires less clearance because the space between the door and adjacent countertop is wider.
- To avoid door contact to countertop consider:
  –Miter the corner of the adjacent countertops 45°, or
  –Pull the refrigerator forward enough to avoid contact.

Stability Leg


- The top-freezer refrigerator is the first cabinet-depth top-freezer. This means depth is more shallow than conventional models and the width is larger. The stability leg gives the unit extra support.

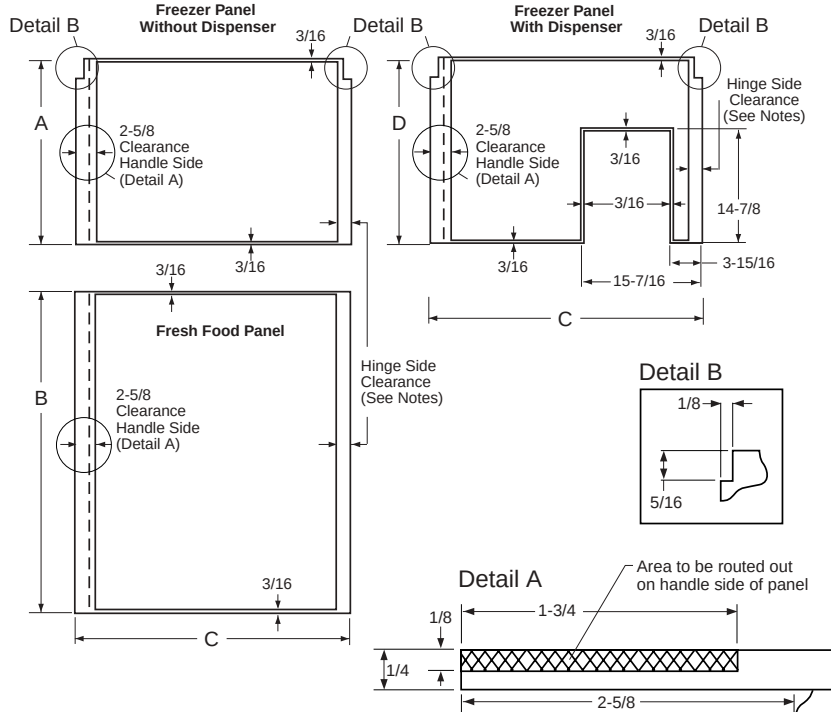

IMPORTANT: Before finalizing specifications for your GE Profile CustomStyle Refrigerator, please NOTE:
- A minimum of 36" is required for refrigerator installation
- Be sure to allow for 1/2" or 3/4" side panels in addition to the 36" minimum

Collar Trim Installation

An enclosure is **required** to match up to the trim, see Typical Installation. To obtain the most integrated look, the cabinet or soffit above the refrigerator should extend out to the same depth as the side panels. The refrigerator opening must have minimum dimensions of 70-1/4" high x 36-1/8" wide x 24-1/2" deep as shown at right. If there is an overhead cabinet, allow 1" for cabinet door clearance with the top trim piece so the cabinet doors can be opened without hitting the top trim. If 1/2" side panels are used, then side trim and panel will be even. If 3/4" side panels are used, then some of the side panel will extend beyond the trim and must be finished.

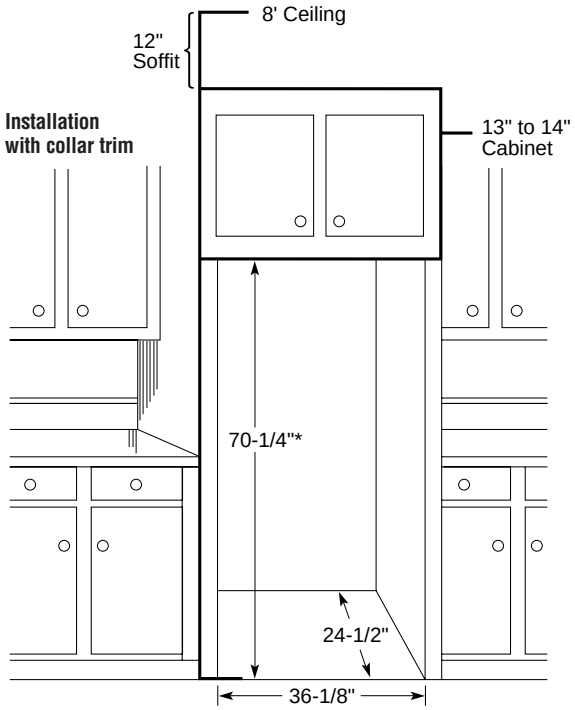

GE Profile Arctica™ and GE® CustomStyle™ Side-By-Side Refrigerators

	GE Profile™							GE®	
	PSC23SHP PSC23SGP	**PSH23SGP PSI23SGP**	**PSC23NHP**	**PSC23NGP**	**PSH23NGP PSI23NGP**	**PSI23SCP PSI23NCP**	**PSC23MGP PSI23MGP**	**GSC23LSQ**	**GSC23LGQ**
Stainless steel model	●	●				● / –		●	
Capacity									
Total (cu. ft.)	22.7 / 22.6	22.6	22.7	22.6	22.6	22.6	22.7	22.7	22.7
Fresh food (cu. ft.)	14.41 / 14.38	14.38	14.41	14.38	14.38	14.38	14.38	14.38	14.38
Freezer (cu. ft.)	8.17	8.24	8.24	8.17	8.24	8.19	8.26	8.26	8.26
Shelf area (sq. ft.)	18.6 / 19.7	19.7	18.6	19.7	19.7	20.6	19.0	17.57	17.57
Fresh Food Features									
Refreshment center	● / –		●						
ClimateKeeper system	●	●	●	●	●	●	●		
Multiflow air system	●	●	●	●	●	●	●	●	●
Upfront electronic digital display	●	●	●	●	●	●			
Upfront electronic touch temp. controls	●	●	●	●	●	●	●	●	●
Electronic sensors	●	●	●	●	●	●	●	●	●
TurboCool setting	●	●	●	●	●	●	●	●	●
SmartWater filtration system	Plus	Plus	Plus	Plus	Plus		Plus	Plus	Plus
LightTouch! dispenser	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water		Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water
Light	●	●	●	●	●		●	●	●
Child lock	●	●	●	●	●		●	●	●
Door alarm	●	●	●	●	●		●	●	●
Quick Ice feature	●	●	●	●	●		●		
Water filter indicator light	●	●	●	●	●		●	●	●
Cabinet shelves	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass	3 Glass
Adjustable	3	3	3	3	3	3	3	3	3
Slide-out, spillproof	2	2	2	2	2	2	2	2	2
QuickSpace shelf	●	●	●	●	●	●	●	●	●
Integrated shelf system	●	●	●	●	●	●	●	●	●
Snugger clip(s)	1 / 2	2	1	2	2	2	2		
Deli pan	Adj. Temp.	Adj. Temp.	Adj. Temp.	Adj. Temp.	Adj. Temp.	Adj. Temp.	Adj. Temp.	1 Sealed	1 Sealed
Vegetable/fruit crisper	Adj. Humid.	Adj. Humid.	Adj. Humid.	Adj. Humid.	Adj. Humid.	Adj. Humid.	Adj. Humid.	Adj. Humid.	Adj. Humid.
CustomCool technology with full-extension drawer	●	●	●	●	●	●			
ClearLook adjustable door bins	3 (1 Adj.) 4 (3 Adj.)	4 (3 Adj.)	3 (1 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)	4 (3 Adj.)
Dairy compartment (removable)	●	●	●	●	●	●	●	●	●
Can storage rack (door)	● / –		●						
In-the-door beverage rack	– / ●	●		●	●	●	●		
Interior light system	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	Tri-level	Dual-level	Dual-level	Dual-level
Quiet Design	Premium	Premium	Premium	Premium	Premium	Premium	Premium	Deluxe	Deluxe
NeverClean condenser	●	●	●	●	●	●	●	●	●
ENERGY STAR®		● / –			● / –				
Freezer Features									
FrostGuard technology	●	●	●	●	●	●	●	●	●
Integrated Ice system	●	●	●	●	●		●	●	●
Wire slide-out baskets	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	4 (3 full-ext.)	3	3	3
Wire cabinet shelves	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)	2 (1 slide-out)
Wire tilt-out door bin(s)	3 (2 Adj.)	3 (2 Adj.)	3 (2 Adj.)	3 (2 Adj.)	3 (2 Adj.)	4 (3 Adj.)	3 (2 Adj.)		
Fixed door bins	1	1	1	1	1	1	1		
Interior light	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Exterior									
Color(s) available*	SS	BS	WW, CC, BB	WW, CC, BB	WW, CC, BB	BS / WW, CC, BB	WW, CC, BB	SS	WW, BB
CustomStyle configuration	Trimless	Trimless	Trimless	Trimless	Installed Trim	Trimless/Install.Trim	Trimless/Install.Trim	Trimless	Trimless
Door handles*	Sculptured	Full-length visor	CM Profile	CM Profile	CM Full-length visor	Full-length visor/ CM Full-length visor	CM Profile/ CM Full-length visor	Stainless Steel	CM
Exterior design	Rounded Doors	Squared Doors	Rounded Doors	Rounded Doors	Squared Doors	Squared Doors	Rounded Doors/ Squared Doors	Rounded Doors	Rounded Doors
Textured steel door and case	Case only	Case only	●	●	Case only	Case only	● / Case only	Case only	●
Adjustable rollers	All	All	All	All	All	All	All	Front	Front
Weights & Dimensions									
Height to top of hinge (in.) A	69-1/4	69-1/4	69-1/4	69-1/4	69-1/4	69-1/4	69-1/4	69 1/4	69 1/4
Height to top of case (in.) B	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4
Height to top of door trim (in.)		70-1/4			70-1/4	70-1/4	– / 70-1/4		
Case depth without door (in.) C	23-7/8	23-7/8	23-7/8	23-7/8	23-7/8	23-7/8	23-7/8	23-7/8	23-7/8
Case depth less door handle (in.) D	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4
Case depth with door handle (in.) E	29-3/16	28-5/16	29-3/16	29-3/16	28-5/16	28-5/16	29-3/16 / 28-5/16	29-3/16	29-3/16
Depth w/fresh food door open 90° (in.) F	45-9/16	45-9/16	45-9/16	45-9/16	45-9/16	45-9/16	45-9/16	45-9/16	45-9/16
Width (in.) G	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4
Width w/door open 90° w/door handle (in.) H	38-3/16	37-5/16	38-3/16	38-3/16	37-5/16	37-5/16	38-3/16 / 37-5/16	38-3/16	38-3/16
Air clearances Each side (in.)	1/8	1/8	1/8	1/8	1/8	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1	1	1	1	1	1
Back (in.)	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Approx. shipping weight (lbs.)	334	334	334	334	334	334	334	334	334
Power/Rating	120V, 60Hz, 15Amps								
Accessories									
Factory trim kit attached	N/A	N/A	N/A	N/A	●	N/A / ●	N/A / ●	N/A	N/A
Black acrylic panels (optional)	N/A	N/A	N/A	N/A	PSPK23DBB	N/A / PSPK23CBB	N/A / PSPK23DBB	N/A	N/A
White acrylic panels (optional)	N/A	N/A	N/A	N/A	PSPK23DWW	N/A / PSPK23CWW	N/A / PSPK23DW	N/A	N/A
Bisque acrylic panels (optional)	N/A	N/A	N/A	N/A	PSPK23DCC	N/A / PSPK23CCC	N/A / PSPK23DCC	N/A	N/A
Stainless steel panels (optional)	N/A	N/A	N/A	N/A	PSPK23DSS	N/A	N/A / PSPK23DSS	N/A	N/A
Black collar trim (optional)	N/A	TRMBISBB	N/A	N/A	TRMBISBB	TRMBISBB	N/A / TRMBISBB	N/A	N/A
White collar trim (optional)	N/A	TRMBISWW	N/A	N/A	TRMBISWW	TRMBISWW	N/A / TRMBISWW	N/A	N/A
Bisque collar trim (optional)	N/A	TRMBISCC	N/A	N/A	TRMBISCC	TRMBISCC	N/A / TRMBISCC	N/A	N/A
Stainless steel collar trim (optional)	N/A	TRMBISSS	N/A	N/A	TRMBISSS	TRMBISSS	N/A / TRMBISSS	N/A	N/A

*Color(s) available: BS = Black case with stainless steel doors, SS = Stainless steel, WW = White on white, CC = Bisque on bisque, BB = Black on black, CM = Color-Matched.
If installed against a wall, allow clearance of 13-15/16" on freezer side to remove bin.
Clearance required to remove fresh food full size pan without disassembling is 18-5/8".

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Total volume and shelf area are calculated by the Association of Home Appliance Manufacturers' standards.


Listed by Underwriters Laboratories

GE Profile CustomStyle Top-Freezer Models

	GE Profile						
	PTC22MBM	**PTC22MFM**	**PTC22SBM**	**PTC22SFM**	**PTI22MBM**	**PTI22MFM**	**PTI22SFM**
Stainless steel model			●	●			●
Capacity							
Total (cu. ft.)	21.9	21.7	21.9	21.7	21.9	21.7	21.7
Fresh food (cu. ft.)	15.4	15.4	15.4	15.4	15.4	15.4	15.4
Freezer (cu. ft.)	6.5	6.3	6.5	6.3	6.5	6.3	6.3
Shelf area (sq. ft.)	22.4	20	22.4	20	22.4	20	20
Fresh Food Features							
SmartWater filtration system		●		●		●	●
LightTouch! dispenser		Crushed Ice, Cubes, Water		Crushed Ice, Cubes, Water		Crushed Ice, Cubes, Water	Crushed Ice, Cubes, Water
Upfront illuminated temperature controls	●	●	●	●	●	●	●
Cabinet shelves	4 Glass	4 Glass	4 Glass	4 Glass	4 Glass	4 Glass	4 Glass
Adjustable	4 Split	4 Split	4 Split	4 Split	4 Split	4 Split	4 Split
Slide-out, spillproof	3	3	3	3	3	3	3
Snugger clip	●	●	●	●	●	●	●
QuickSpace shelf	●	●	●	●	●	●	●
Meat pan	Adj. Temperature	Adj. Temperature	Adj. Temperature	Adj. Temperature	Adj. Temperature	Adj. Temperature	Adj. Temperature
Vegetable/fruit crisper(s)	2 Adj. Humidity	2 Adj. Humidity	2 Adj. Humidity	2 Adj. Humidity	2 Adj. Humidity	2 Adj. Humidity	2 Adj. Humidity
Slide-out, spillproof crisper cover	●	●	●	●	●	●	●
ClearLook modular door bins	4 Adj. w/gallon storage	4 Adj. w/gallon storage	4 Adj. w/gallon storage	4 Adj. w/gallon storage	4 Adj. w/gallon storage	4 Adj. w/gallon storage	4 Adj. w/gallon storage
Fixed door bins	1 F/W tall bottle	1 F/W tall bottle	1 F/W tall bottle	1 F/W tall bottle	1 F/W tall bottle	1 F/W tall bottle	1 F/W tall bottle
Slide-out, slide-over pan removal system	●	●	●	●	●	●	●
Dairy compartment	●	●	●	●	●	●	●
Beverage rack	●	●	●	●	●	●	●
Interior light system	Dual	Dual	Dual	Dual	Dual	Dual	Dual
Quiet Design	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe	Deluxe
NeverClean condenser	●	●	●	●	●	●	●
ENERGY STAR®		●		●		●	●
Freezer Features							
Factory-installed electronic ice-maker & bin	Opt. (IM4A)	●	Opt. (IM4A)	●	Opt. (IM4A)	●	●
Ice 'N Easy trays	3		3		3		
Ice storage bin	●		●		●		
Wire compartment shelf(s)	2 Split (Adj.)	1(Adj.)	2 Split (Adj.)	1(Adj.)	2 Split (Adj.)	1(Adj.)	1(Adj.)
Door bins	2 Adj./1 F/W fixed	2 fixed (1 w/gallon storage)	2 Adj./1 F/W fixed	2 fixed (1 w/gallon storage)	2 Adj./1 F/W fixed	2 fixed (1 w/gallon storage)	2 fixed (1 w/gallon storage)
Interior light	●	●	●	●	●	●	●
Exterior							
Color(s) available*	WW, BB	WW, CC, BB	BS	BS	WW, BB	WW, BB	BS
CustomStyle configuration	Trimless	Trimless	Trimless	Trimless	Installed Trim	Installed Trim	Installed Trim
Premium door handles*	CM Deluxe	CM Deluxe	Black Deluxe	Black Deluxe	CM Full-Length	CM Full-Length	Stainless Steel Appearance
Choose right or left door opening	●	●	●	●	●	●	●
Reversible doors	●						
Exterior design	Rounded Doors	Rounded Doors	Rounded Doors	Rounded Doors	Squared Doors	Squared Doors	Squared Doors
Adjustable rollers	All	All	All	All	All	All	All
Weights & Dimensions							
Height to top of hinge (in.) A	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8	69-7/8
Height to top of case (in.) B	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4	68-3/4
Height to top of door trim (in.)	N/A	N/A	N/A	N/A	70-1/2	70-1/2	70-1/2
Case depth without door (in.) C	23-3/4	23-3/4	23-3/4	23-3/4	23-3/4	23-3/4	23-3/4
Depth less door handle (in.) D	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4	26-3/4
Depth with door handle (in.) E	28-5/8	28-5/8	28-5/8	28-5/8	28-3/8	28-3/8	28-5/8
Depth with fresh food door open 90° (in.) F	61	61	61	61	61	61	61
Width (in.) G	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4	35-3/4
Width with door open 90° w/door handle (in.) H	38-1/4	38-1/4	38-1/4	38-1/4	38	38	38
Air clearances Each side (in.)	1/8	1/8	1/8	1/8	1/8	1/8	1/8
Top (in.)	1	1	1	1	1	1	1
Back (in.)	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Approx. shipping weight (lbs.)	300	324	300	324	300	324	360
Power/Ratings	◄ 120V, 60Hz, 15 Amps ►						
Accessories							
Black acrylic panels (optional)	N/A	N/A	N/A	N/A	PTPK22CBB	PTPK22DBB	N/A
White acrylic panels (optional)	N/A	N/A	N/A	N/A	PTPK22CWW	PTPK22DWW	N/A
Stainless steel panels (optional)	N/A	N/A	N/A	N/A	PTPK22CSS	PTPK22DSS	N/A
Black collar trim (optional)	N/A	N/A	N/A	N/A	TRMBISBB	TRMBISBB	N/A
White collar trim (optional)	N/A	N/A	N/A	N/A	TRMBISWW	TRMBISWW	N/A
Bisque collar trim (optional)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Stainless steel collar trim (optional)	N/A	N/A	N/A	N/A	TRMBISSS	TRMBISSS	TRMBISSS


*Color(s) available: BS = Black case with stainless steel doors, WW = White on white, CC = Bisque on bisque, BB = Black on black, CM = Color-Matched.

Side-By-Side Refrigerators

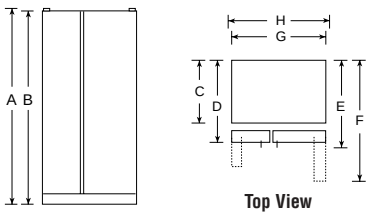

Front View Top View

Top-Freezer No-Front Refrigerator



Front View Top View

ALL MODELS AVAILABLE IN U.S. AND CANADA.

Answers that click!
GE puts everything you need at your fingertips.



GE Appliances web site — 16 million visitors a year!
Visit us at GEAppliances.com

Everything you need to know about GE products is here. Access up-to-date information, find out "what's new," obtain dimensions, get installation tips and more. Extremely user-friendly, this one-stop site lets you research by brand, category or model number and even buy online through a local GE dealer.

GE Answer Center® saves you time.
800.626.2000

This 24-hour-a-day, 7-day-a-week service provides answers on product features, installation, service and more.

A Century of Quality and Innovation

For more than a century, GE has been committed to producing innovative products that change the way people live. The result of thorough research and rigorous testing, GE appliances are designed for years of dependable performance. Today, the GE tradition of quality and innovation continues.

GE Appliances

GE Consumer Products
General Electric Company
Louisville, Kentucky 40225
GEAppliances.com

Before purchasing an appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your retailer or GEAppliances.com

GE has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.

© 2003 General Electric Company
Pub. No. 2-X123 PC36635