



## SPL5QT SOUNDBAR DATA SHEET

### SPL5QT TECHNICAL SPECIFICATIONS

|                               |                                                                        |
|-------------------------------|------------------------------------------------------------------------|
| <b>UOM</b>                    | <b>SPL5QT</b><br>Each                                                  |
| <b>Tweeter</b>                | 0.75" (19mm) Aluminum                                                  |
| <b>Woofer</b>                 | 5.25" (132mm) Aluminum                                                 |
| <b>Frequency Response</b>     | 65Hz-24kHz +/-3dB                                                      |
| <b>Impedance</b>              | 8 ohms (woofer quantity dependent)                                     |
| <b>Power Handling (RMS)</b>   | 25 watts minimum; 100 watts maximum                                    |
| <b>Sensitivity (2.83V/1m)</b> | 89dB SPL                                                               |
| <b>Enclosure</b>              | Aircraft Grade Aluminum                                                |
| <b>Width (W)</b>              | Built-to-Order (minimum required width depends on model configuration) |
| <b>Dims (Depth x H)</b>       | 3.5" x 5.75" (88.90mm x 146.05mm)                                      |
| <b>Required Depth (D)</b>     | 3.962" (100.63mm)                                                      |
| <b>Grille Height (H)</b>      | 5.75" (146.05mm)                                                       |
| <b>Shipping Weight</b>        | Dependent on width                                                     |

### SPL5QT WIDTHS/HEIGHT

**SPL5QT-C Minimum Width:** 18.75"

**SPL5QT-CS Minimum Height:** 22.5"


**SPL5QT-LR Minimum Width:** 24.375"

**SPL5QT-LCR Minimum Width:** 41.25"

**SPL5QT-LRSUB Minimum Width:** 35.625"

### SPL5QT FEATURES

- Built-to-order based on application and configuration to perfectly match TV size
- Paintable grille available by request only
- LR, LRSUB, LCR, C, CS configurations
- Available in standard or marine grade
- Through-hole mount, TV mount, or wall mount options, mounting brackets sold separately

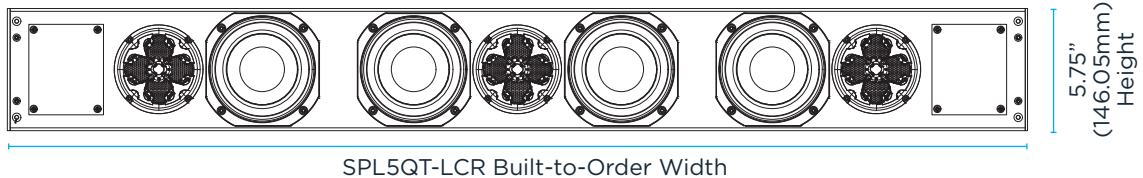

SPL5QT-LCR Built-to-Order Width

Front View



SPL5QT-C Built-to-Order Width

Front View




SPL5QT-LRSUB Built-to-Order Width

Front View



SPL5QT-LR Built-to-Order Width

Front View

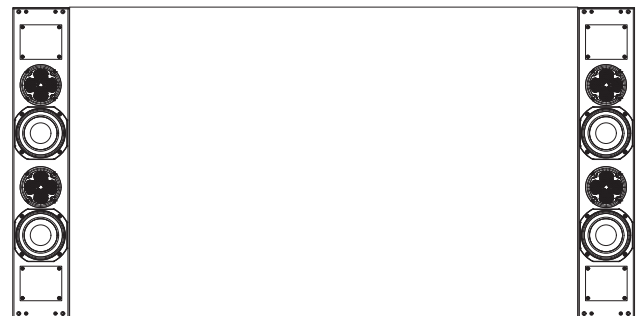

SPL5QT-CS Built-to-Order Height  
Front View

SPL-QT models feature panels on the front baffle that provide access during product manufacturing for improved build consistency. Not field-serviceable.

**LIMITED FIVE (5) YEAR WARRANTY** Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2024 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at [www.sonance.com](http://www.sonance.com).

JAMES by SONANCE • 2185 Park Place • Minden, NV 89423 • USA • PHONE: (775) 461-7500 • [www.jamesloudspeaker.com](http://www.jamesloudspeaker.com)

11.05.2024