

Economy Series

12VDC

3W EquiLine Puck

3W

218 Lumens

100°

With recessed or surface mount ability, EquiLine LED Pucks are perfect for use in a wide range of applications. Designed for the economically conscious, they feature a slim profile and a 79" (2 m) starter cord attached with an unattached AMP® connector for easy wire routing.



Features:

1/2" (13 mm) recessed depth

100° beam spread

Luniform output – no "dots"

Metal heatsink for cool operation

Recess or surface mount

Typical Applications:

Furniture

Desk

Headboards

Cabinets and light boxes

Closets (UL listed for use within closet storage spaces)



Slim 1/2" (13 mm) recess profile



Available Finishes:





Black (BL)



Nickel (NI)

Dimensions:

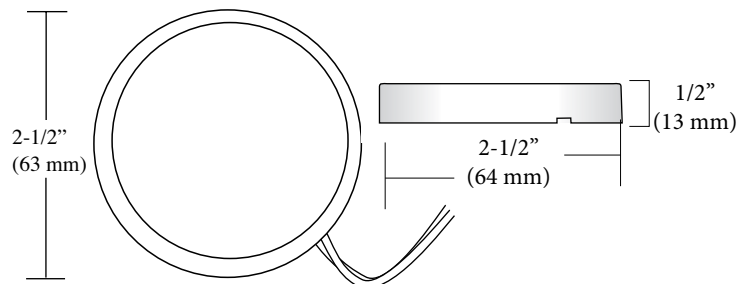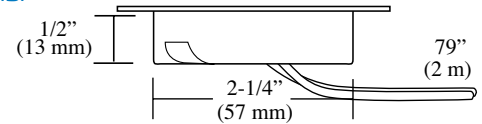

Available in Black or Nickel



Surface mount ring sold separately

Typical Setup:



- Required
- Optional

Accessories:



Power Supplies
see power supply section

EquiLine Puck Surface Ring
L-SMR-2LED-BL-1
L-SMR-2LED-NI-1

Controllers
see controller section

Starter Cord / Link Cords
see pg. 165 under starter/
extension cords

Specifications:

Wattage	Lumens	Efficacy (lm/W)	Input Voltage	Diode Life	Max Per 60W Power Supply	Mounting	Warranty	Beam Angle										
3W	218	73	12VDC	25,000 Hours	20 Fixtures	Recess/ Surface	2 Year											
Photometric Data					Color Temperature													
		<table border="1"> <thead> <tr> <th>Height</th> <th>Light Output</th> <th>Beam Area</th> </tr> </thead> <tbody> <tr> <td>1ft (.3 m)</td> <td>89.00Fc (958lx)</td> <td>2ft diameter (.6 m diameter)</td> </tr> <tr> <td>3ft (.9 m)</td> <td>9.89Fc (106.5lx)</td> <td>7ft diameter (2.1 m diameter)</td> </tr> <tr> <td>6ft (1.8 m)</td> <td>2.47Fc (26.6lx)</td> <td>14ft diameter (4.3 m diameter)</td> </tr> </tbody> </table>	Height	Light Output	Beam Area	1ft (.3 m)	89.00Fc (958lx)	2ft diameter (.6 m diameter)	3ft (.9 m)	9.89Fc (106.5lx)	7ft diameter (2.1 m diameter)	6ft (1.8 m)	2.47Fc (26.6lx)	14ft diameter (4.3 m diameter)				
Height	Light Output	Beam Area																
1ft (.3 m)	89.00Fc (958lx)	2ft diameter (.6 m diameter)																
3ft (.9 m)	9.89Fc (106.5lx)	7ft diameter (2.1 m diameter)																
6ft (1.8 m)	2.47Fc (26.6lx)	14ft diameter (4.3 m diameter)																
L-POC-3EQFR-C Tested																		

See page 44 for part numbers and descriptions