



B527 Three Hole Offset Plate Connection

- Standard finishes: ZN, GRN
- Wt./C 54 Lbs. (24.5 kg)

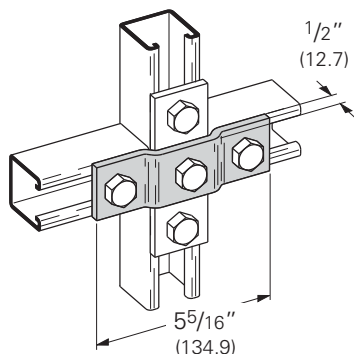


B116-52 Three Hole U-Support

- Standard finishes: ZN, GRN
- Wt./C 70 Lbs. (31.7 kg)

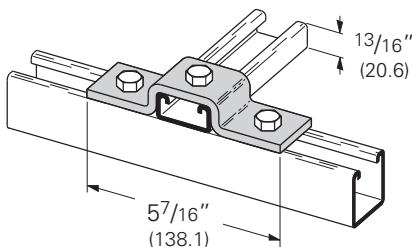


B116-42 Three Hole U-Support

- Standard finishes: ZN, GRN
- Wt./C 75 Lbs. (34.0 kg)

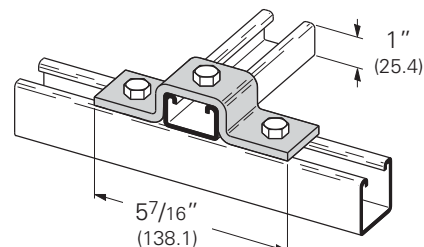


B116-32 Three Hole U-Support

- Standard finishes: ZN, GRN
- Wt./C 84 Lbs. (38.1 kg)

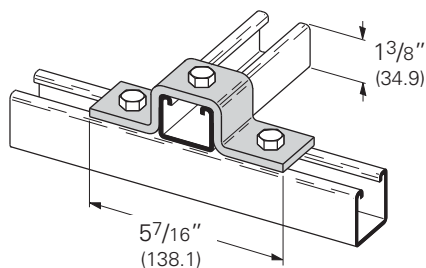


B116-32A Three Hole U-Support

- Standard finishes: ZN, GRN
- Wt./C 116 Lbs. (52.6 kg)

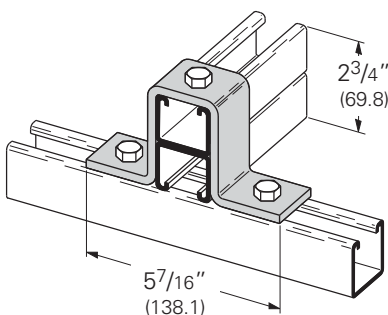

B116-12 Three Hole U-Support


- Standard finishes: ZN, GRN
- Wt./C 108 Lbs. (49.0 kg)

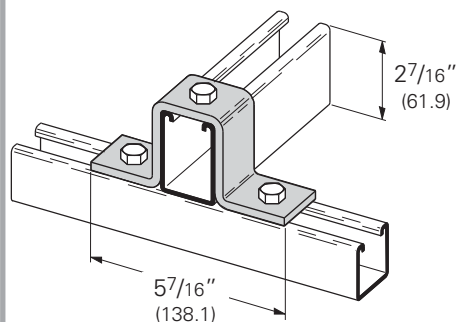

B107 Five Hole U-Support


- Standard finishes: ZN, GRN, HDG
- Wt./C 85 Lbs. (38.5 kg)

PA ZN
GRN

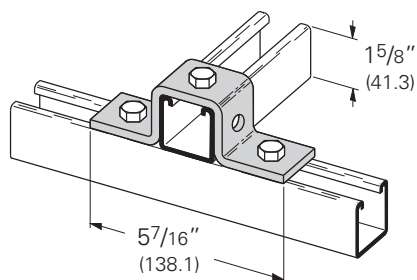


B107-22A Three Hole U-Support

- Standard finishes: ZN, GRN
- Wt./C 126 Lbs. (57.1 kg)

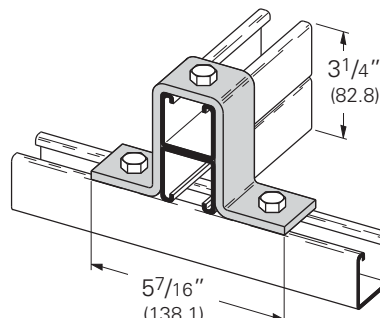

B588 Three Hole U-Support

- Standard finishes: ZN, GRN
- Wt./C 157 Lbs. (71.2 kg)

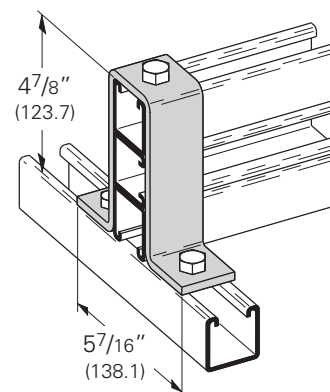

PA Pre-assembled fitting.


Reference page 73 for general fitting and standard finish specifications.

'U' Fittings

B412

Three Hole Offset U-Support


- Standard finishes: ZN, GRN
- Wt./C 89 Lbs. (40.3 kg)

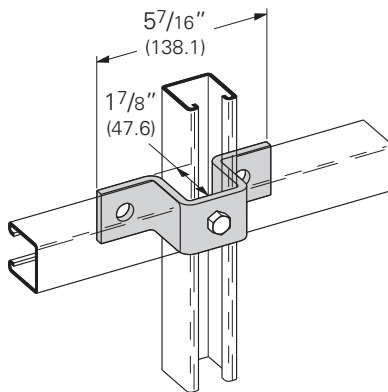

B107S

Five Hole U-Support


- Material: 7 Gauge (4.5)
ASTM A1011 33,000 PSI min. yield
- Standard finishes: ZN, GRN
- Wt./C 51 Lbs. (23.1 kg)

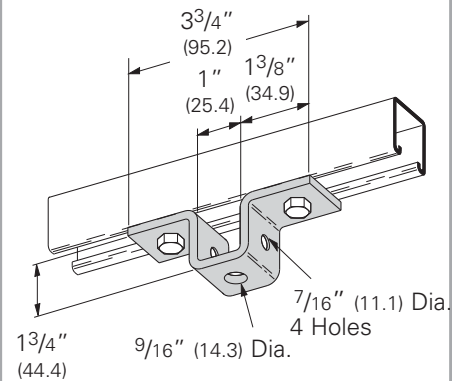

B596

Three Hole Swivel Clevis


- Material: 7 Gauge (4.5)
- Standard finishes: ZN, GRN
- Wt./C 53 Lbs. (24.0 kg)



B578

Three Hole Light-Weight U-Support


- Material: 10 Gauge (3.4)
ASTM A1011 HSLAS Gr. 50
- Standard finishes: ZN, GRN
- Wt./C 18 Lbs. (8.1 kg)

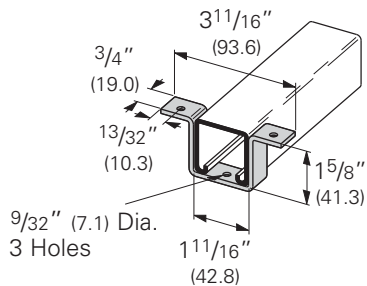

B594

Five Hole U-Support


- Standard finishes: ZN, GRN
- Wt./C 106 Lbs. (48.1 kg)

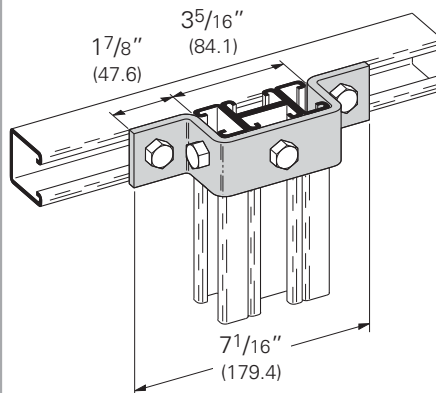

B266

Six Hole U-Support


- Standard finishes: ZN, GRN
- Wt./C 105 Lbs. (47.6 kg)

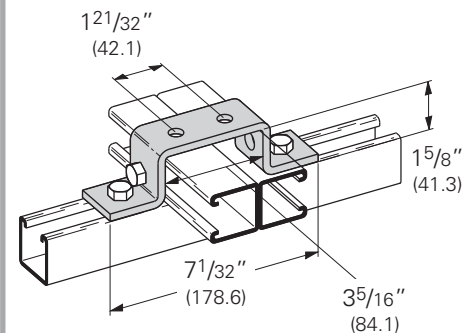

B425

Six Hole U-Support


- Standard finishes: ZN, GRN
- Wt./C 167 Lbs. (75.7 kg)



B581

Eight Hole U-Support


- Standard finishes: ZN, GRN
- Wt./C 201 Lbs. (91.2 kg)

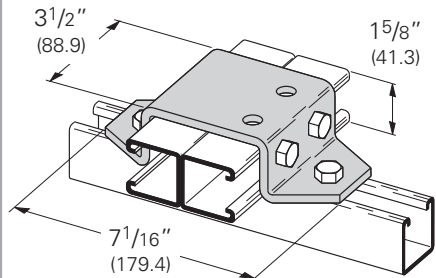

B519

Eight Hole U-Support


- Standard finishes: ZN, GRN
- Wt./C 266 Lbs. (102.5 kg)

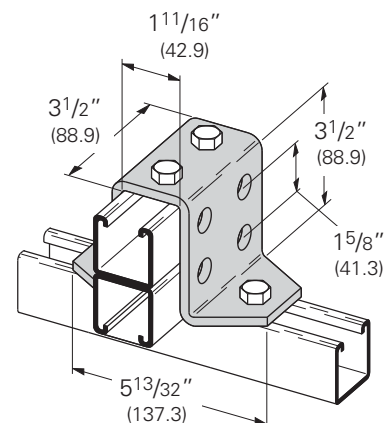

Reference page 73 for general fitting and standard finish specifications.

B333 Slotted Three Hole U-Support For B22


- Standard finishes: ZN, GRN

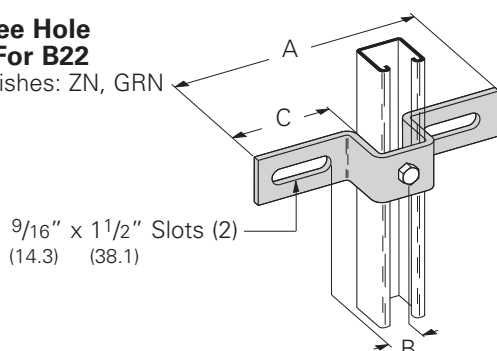

Part No.	A In. mm	B In. mm	C In. mm	Wt./C Lbs. kg
B333-1	7 ¹ / ₂ " (190.5)	15 ¹ / ₁₆ " (33.3)	27 ⁷ / ₈ " (73.0)	103 (46.7)
B333-2	8 ¹ / ₂ " (215.9)	11 ⁵ / ₁₆ " (49.2)	33 ³ / ₈ " (85.7)	115 (52.1)
B333-3	10 ³ / ₈ " (263.5)	27 ⁷ / ₈ " (73.0)	45 ¹ / ₁₆ " (109.5)	135 (61.2)

B451 Slotted Three Hole U-Support With Gusset For B22


- Consists of B333-1, 2, or 3 with gusset plate welded on back.
- Material: ASTM A1011 HSLAS Gr. 50
- Standard finishes: ZN, GRN

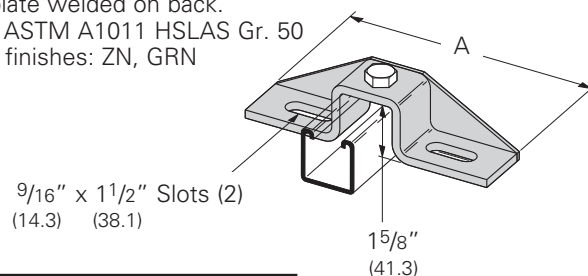

Part No.	A In. mm	Wt./C Lbs. kg
B451-1	7 ¹ / ₂ " (190.5)	137 (62.1)
B451-2	8 ¹ / ₂ " (215.9)	156 (70.7)
B451-3	10 ³ / ₈ " (263.5)	172 (78.0)

B408 Two Hole Bus Duct Clevis


- Standard finishes: ZN, GRN

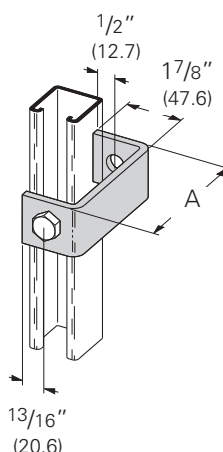

Part No.	A In. mm	Wt./C Lbs. kg
B408-1	2 ¹³ / ₃₂ " (61.1)	58 (26.3)
B408-2	3 ²⁵ / ₃₂ " (96.0)	76 (34.5)
B408-3	4 ³ / ₄ " (762.0)	88 (39.9)

B358 Two Hole Clevis


- Standard finishes: ZN, GRN

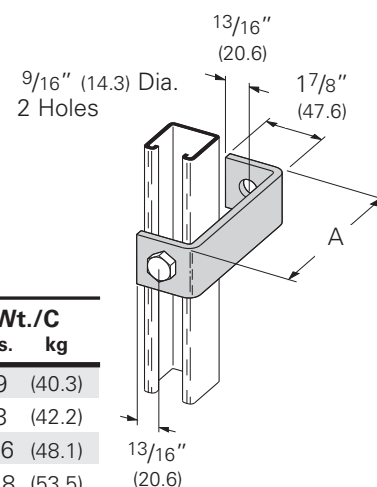

Part No.	A In. mm	Wt./C Lbs. kg
B358-4	4" (101.6)	89 (40.3)
B358-5	5" (127.0)	93 (42.2)
B358-6	6" (152.4)	106 (48.1)
B358-7	7" (177.8)	118 (53.5)
B358-8	8" (203.2)	132 (59.9)


B173 Four Hole Clevis

- Standard finishes: ZN, GRN
- Wt./C 71 Lbs. (32.2 kg)




B595 Three Hole Clevis

- Standard finishes: ZN, GRN
- Wt./C 75 Lbs. (34.0 kg)



B405 Three Hole Suspension Clevis

- Standard finishes: ZN, GRN
- Wt./C 75 Lbs. (34.0 kg)

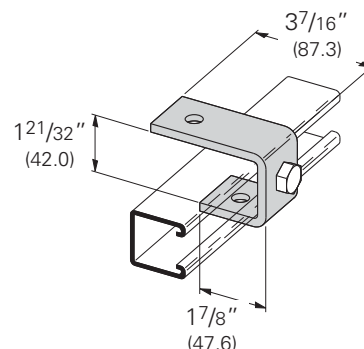


'U' Fittings

B398-1

Three Hole Cup Support


- Standard finishes: ZN, GRN
- Wt./C 73 Lbs. (33.1 kg)



B400

Three Stud Ring Connection


- 1/2"-13 stud protrudes 1" (25.4mm)
- Standard finishes: ZN
- Wt./C 85 Lbs. (38.5 kg)



B400-1

One Stud Ring Connection


- 1/2"-13 stud protrudes 1" (25.4mm)
- Standard finishes: ZN
- Wt./C 53 Lbs. (24.0 kg)



B400-2

One Stud Ring Connection


- 1/2"-13 stud protrudes 1" (25.4mm)
- Standard finishes: ZN
- Wt./C 40 Lbs. (18.1 kg)



B400-3

Two Stud Ring Connection

- 1/2"-13 stud protrudes 1" (25.4mm)
- Standard finishes: ZN
- Wt./C 59 Lbs. (26.7 kg)



B400-4

Two Stud Ring Connection

- 1/2"-13 stud protrudes 1" (25.4mm)
- Standard finishes: ZN
- Wt./C 59 Lbs. (26.7 kg)

