

Wing Fittings


B269R
Six Hole Single Corner Connection (Right Hand)
- Standard finishes: ZN, GRN
- Wt./C 120 Lbs. (54.4 kg)

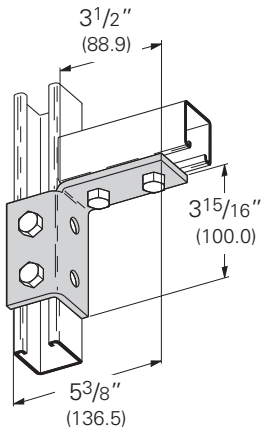


B269L
Six Hole Single Corner Connection (Left Hand)
- Standard finishes: ZN, GRN
- Wt./C 120 Lbs. (54.4 kg)

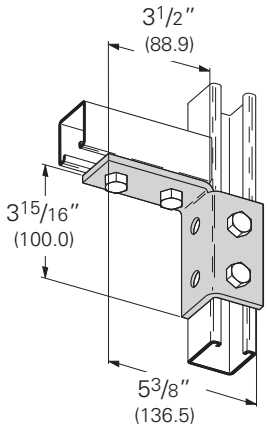


B119
Six Hole Double Corner Connection
- Standard finishes: ZN, GRN
- Wt./C 71 Lbs. (32.2 kg)

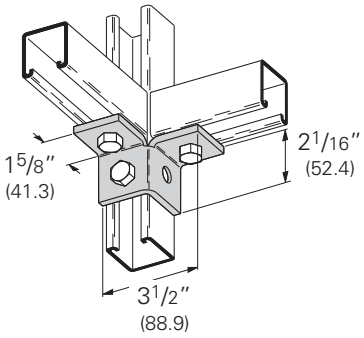


B120
Six Hole Double Corner Connection
- Standard finishes: ZN, GRN
- Wt./C 110 Lbs. (49.9 kg)

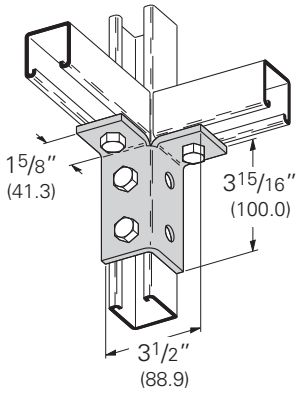


B121
Eight Hole Double Corner Connection
- Standard finishes: ZN, GRN
- Wt./C 152 Lbs. (68.9 kg)

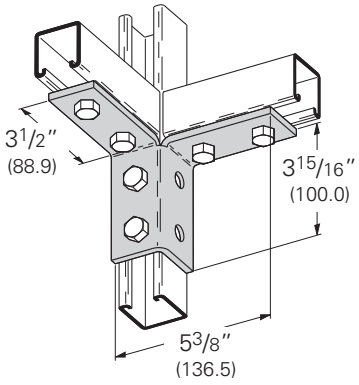


B271
Five Hole Double Wing Connection
- Standard finishes: ZN, GRN
- Wt./C 95 Lbs. (43.1 kg)

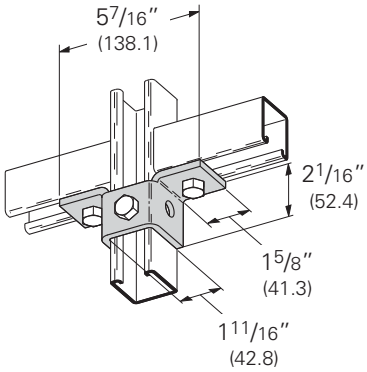


B272
Eight Hole Double Wing Connection
- Standard finishes: ZN, GRN
- Wt./C 156 Lbs. (70.7 kg)

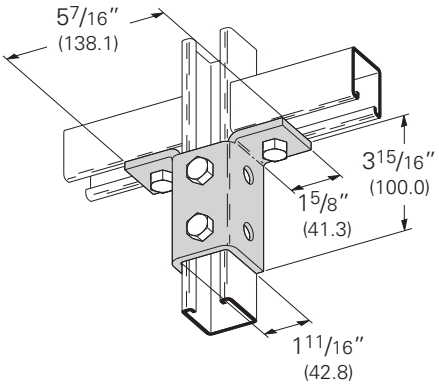

B273
Ten Hole Double Wing Connection
- Standard finishes: ZN, GRN
- Wt./C 185 Lbs. (83.9 kg)

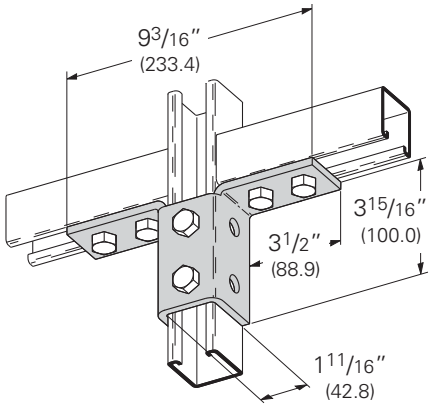


B122
Six Hole Triple Wing Connection
- Standard finishes: ZN, GRN
- Wt./C 110 Lbs. (49.9 kg)

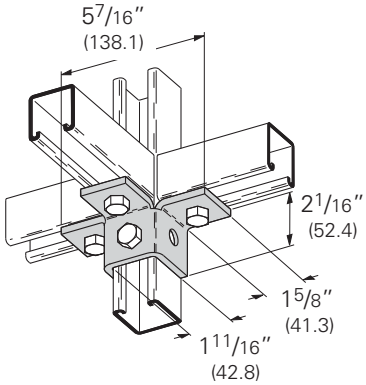


Reference page 73 for general fitting and standard finish specifications.


B123
Twelve Hole Triple Wing Connection
- Standard finishes: ZN, GRN
- Wt./C 234 Lbs. (106.1 kg)

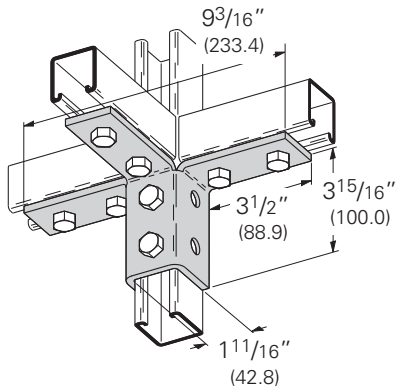


B124
Nine Hole Triple Wing Connection
- Standard finishes: ZN, GRN
- Wt./C 177 Lbs. (80.3 kg)

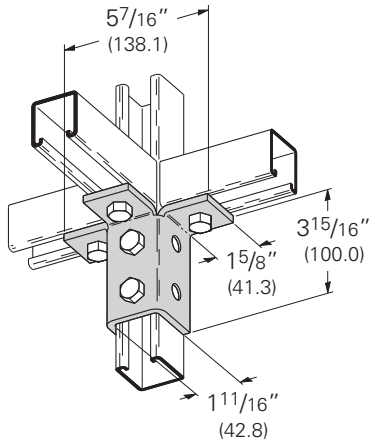


B276
Fourteen Hole Double Corner Gussetted Connection
- Standard finishes: ZN, GRN
- Wt./C 196 Lbs. (88.9 kg)

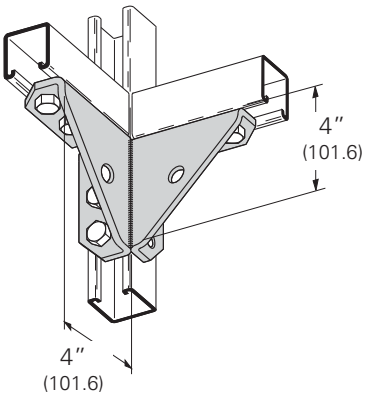


B274R
Eight Hole Single Corner Gussetted Connection (Right Hand)
- Standard finishes: ZN, GRN
- Wt./C 176 Lbs. (79.8 kg)

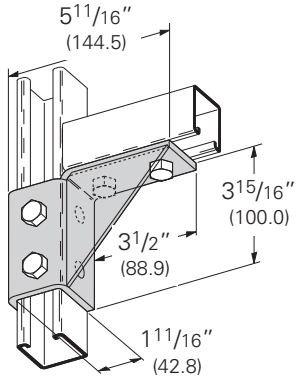


B274L
Eight Hole Single Corner Gussetted Connection (Left Hand)
- Standard finishes: ZN, GRN
- Wt./C 176 Lbs. (79.8 kg)

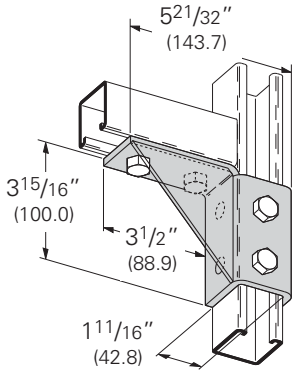


B495
Ten Hole Double Wing Gussetted Connection
- Standard finishes: ZN, GRN
- Wt./C 240 Lbs. (108.8 kg)

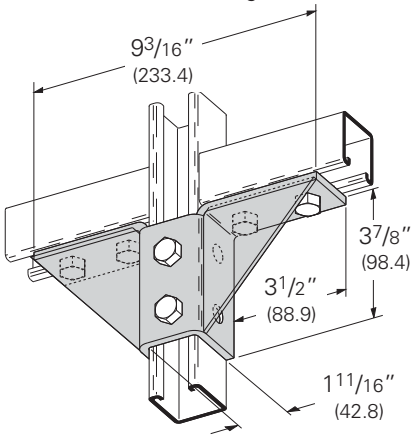


B277
Twelve Hole Triple Wing Gussetted Connection
- Standard finishes: ZN, GRN
- Wt./C 285 Lbs. (129.3 kg)

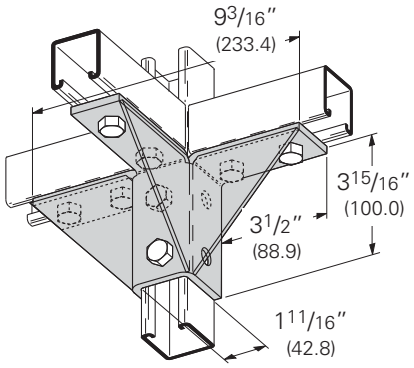

B362
Eight Hole Double Corner Gussetted Connection
- Standard finishes: ZN, GRN
- Wt./C 226 Lbs. (102.5 kg)

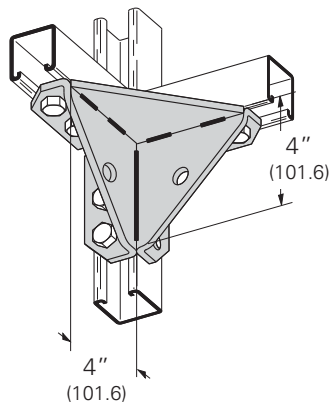


B571
Eight Hole Wing Connection
- Standard finishes: ZN, GRN
- Wt./C 201 Lbs. (91.2 kg)

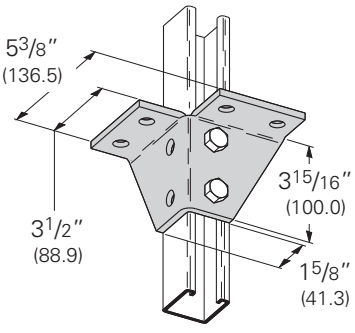


Strut Fittings

Reference page 73 for general fitting and standard finish specifications.


B346L
Eight Hole Double Corner Gussetted Connection (Left Hand)
- Standard finishes: ZN, GRN
- Wt./C 242 Lbs. (109.8 kg)

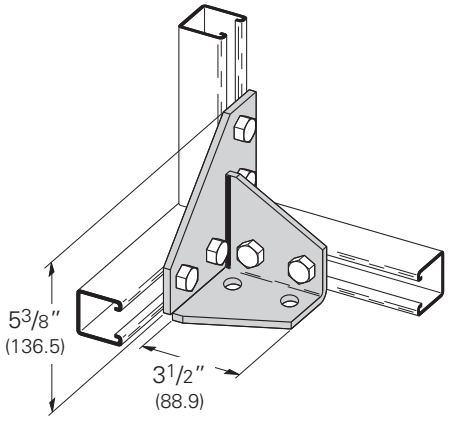


B346R
Eight Hole Double Corner Gussetted Connection (Right Hand)
- Standard finishes: ZN, GRN
- Wt./C 242 Lbs. (109.8 kg)

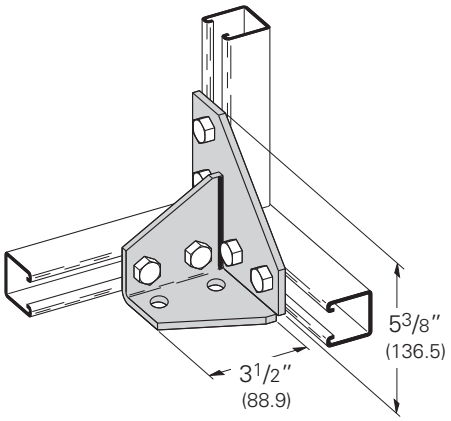


B279
Post Base for B22
- Standard finishes: ZN, GRN
- Wt./C 314 Lbs. (142.4 kg)

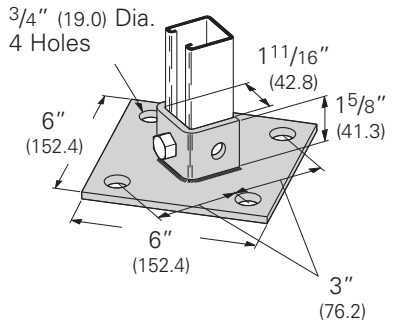


B279SQ
Post Base for B22
- Standard finishes: ZN, GRN
- Wt./C 314 Lbs. (142.4 kg)

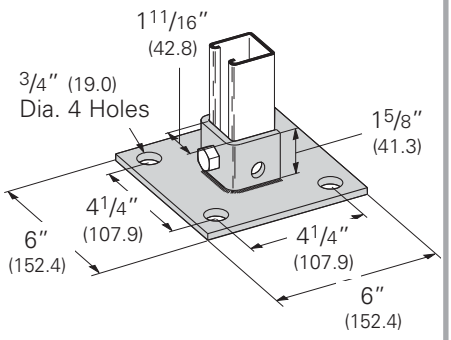


B279FL
Post Base for B22
- Standard finishes: ZN, GRN
- Wt./C 230 Lbs. (104.3 kg)




B280
Post Base for B22
- Standard finishes: ZN, GRN, HDG, SS4, AL
- Wt./C 392 Lbs. (177.8 kg)

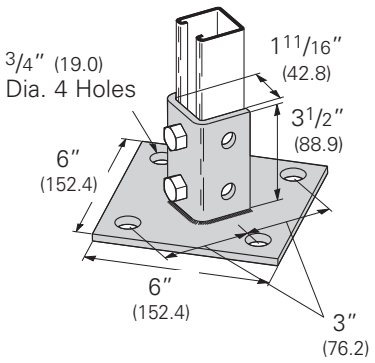

B280SQ
Post Base for B22
- Standard finishes: ZN, GRN, HDG, SS4, AL
- Wt./C 392 Lbs. (177.8 kg)

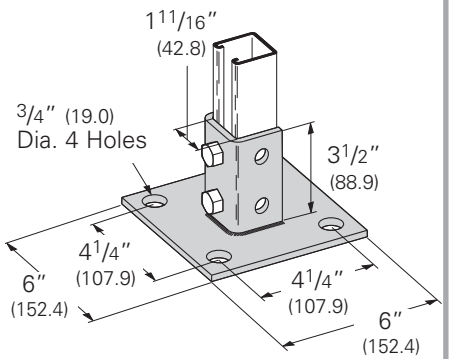

B280FL
Post Base for B22
- Standard finishes: ZN, GRN, HDG, SS4
- Wt./C 312 Lbs. (141.5 kg)

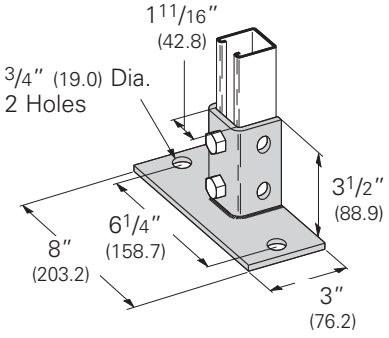

Reference page 73 for general fitting and standard finish specifications.