

SONANCE


VISUAL EXPERIENCE DATA SHEET

VX66 LCR

TECHNICAL SPECIFICATIONS

SKU	VX66 LCR 93656 - Each
Tweeter	1" (25mm) ceramic dome, Ferrofluid-cooled, acoustic back chamber
Woofer	Two 6.5" (165mm) Kevlar/Nomex cones, rubber surrounds
Frequency Response	43Hz - 20kHz +/-3dB
Impedance	8 ohms nominal; 6 ohms minimum
Power Handling (RMS)	5 watts minimum; 140 watts maximum
Sensitivity (2.83V/1m)	90dB SPL
Micro Trim Grille (WxH)	8.23" x 15.87" (208.9mm x 403.1mm)
Trimless Grille (WxH)	7.88" x 15.52" (200.1mm x 394.3mm)
Speaker Mounting Depth (D)	3.5" (89mm)
Mounting Depth + Retrofit Encl. (D)	3.84" (97.6mm)
Cut-Out Dims (WxH)	6.9375" x 14.57" (176mm x 370mm)
Shipping Weight	10 lbs. (4.5kg)

DIMENSIONAL DRAWINGS

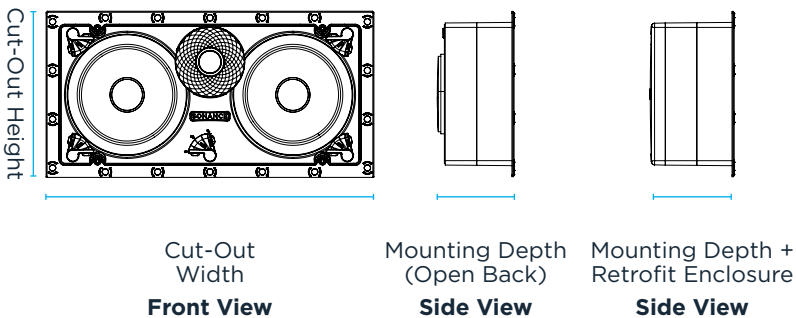

VX 6" LCR ACCESSORIES

VX6-LCR-GRILLE-T 6" Micro Trim LCR Grille / Each	93657
VX6-LCR-GRILLE-NT 6" Trimless LCR Grille / Each	93658
VX6-LCR-ENCL 6" LCR Rectangle Enclosure / Each	93659
MEDIUM LCR FLEX BRACKET 6" LCR Rectangle Flex Bracket / Each	92475

LIMITED LIFETIME WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the life of the Product, except for the grille, which is warranted for five (5) years. Sonance will at its option and expense either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. ©2024 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com. 991 Calle Amanecer • San Clemente, CA 92673 USA • Phone: (949) 492-7777 • Fax: (949) 361-5151 • Technical Support: (949) 492-7777 10.18.2024