


Pipe Clamps

B2400 Series Standard Pipe Clamp

- Safety Factor of 5
- B2400-3/4 thru B2400-8 are UL listed
- Order hardware separately
- Other sizes available upon request
- Material: Sizes - 1/2" - 1 1/2", ASTM A1011 33,000 PSI min. yield;
2" - 12", ASTM A1018 33,000 PSI min. yield;
14"-Larger, ASTM A36
- Standard finish: ZN
- Ductile Iron Sizes Available
- Meets requirements of MSS SP-58 & SP-69 Type 26

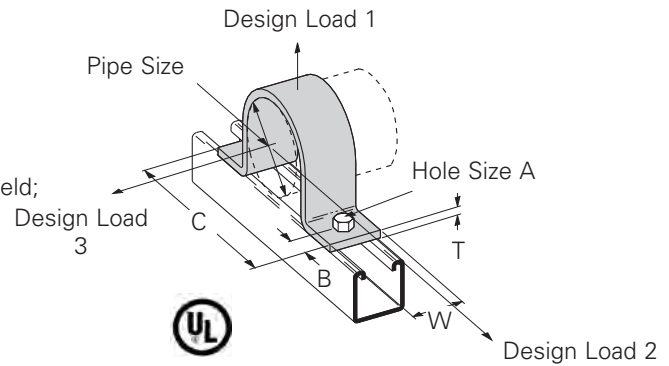

Part No.	Pipe Size In. mm	A In. mm	B In. mm	C In. mm	T In. mm	W In. mm
B2400-1/2	1/2" (15)	5/16" (7.9)	7/16" (11.1)	2 13/16" (71.4)	10 Ga. (3.4)	1 5/8" (41.3)
B2400-3/4	3/4" (20)	5/16" (7.9)	7/16" (11.1)	3" (76.2)	10 Ga. (3.4)	1 5/8" (41.3)
B2400-1	1" (25)	5/16" (7.9)	7/16" (11.1)	3 17/32" (89.7)	10 Ga. (3.4)	1 5/8" (41.3)
B2400-1 1/4	1 1/4" (32)	5/16" (7.9)	7/16" (11.1)	3 3/4" (95.2)	10 Ga. (3.4)	1 5/8" (41.3)
B2400-1 1/2	1 1/2" (40)	5/16" (7.9)	7/16" (11.1)	4 1/16" (103.2)	10 Ga. (3.4)	1 5/8" (41.3)
B2400-2	2" (50)	7/16" (11.1)	1 1/16" (17.4)	5 21/32" (143.6)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-2 1/2	2 1/2" (65)	7/16" (11.1)	1 1/16" (17.4)	6 5/32" (156.3)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-3	3" (80)	7/16" (11.1)	1 1/16" (17.4)	6 25/32" (172.2)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-3 1/2	3 1/2" (90)	7/16" (11.1)	1 1/16" (17.4)	7 9/32" (184.9)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-4	4" (100)	9/16" (14.3)	1 1/16" (17.4)	7 25/32" (197.6)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-5	5" (125)	9/16" (14.3)	1 1/16" (17.4)	8 7/8" (225.4)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-6	6" (150)	9/16" (14.3)	1 1/16" (17.4)	9 15/16" (252.4)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-8	8" (200)	9/16" (14.3)	1 1/16" (17.4)	11 31/32" (304.0)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-10	10" (250)	9/16" (14.3)	1 1/16" (17.4)	14" (355.6)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-12	12" (300)	9/16" (14.3)	1 1/16" (17.4)	16" (406.4)	1 1/4" (6.3)	1 5/8" (41.3)
B2400-14	14" (350)	1 5/16" (23.8)	1 1/2" (38.1)	20 3/4" (527.0)	3/8" (9.5)	1 3/4" (44.4)
B2400-16	16" (400)	1 5/16" (23.8)	1 1/2" (38.1)	22 3/4" (577.8)	3/8" (9.5)	1 3/4" (44.4)
B2400-18	18" (460)	1 5/16" (23.8)	1 3/4" (44.4)	27" (685.8)	1/2" (12.7)	1 3/4" (44.4)
B2400-20	20" (510)	1 5/16" (23.8)	1 3/4" (44.4)	29" (736.6)	1/2" (12.7)	1 3/4" (44.4)
B2400-24	24" (610)	1 5/16" (23.8)	1 3/4" (44.4)	33" (838.2)	1/2" (12.7)	1 3/4" (44.4)

Part No.	Design Load 1 Lbs. kN	Design Load 2 Lbs. kN	Design Load 3 Lbs. kN	Wt./C Lbs. kg
B2400-1/2	600 (2.67)	150 (.67)	105 (.47)	23 (10.4)
B2400-3/4	600 (2.67)	150 (.67)	105 (.47)	26 (11.8)
B2400-1	600 (2.67)	150 (.67)	120 (.53)	31 (14.0)
B2400-1 1/4	600 (2.67)	150 (.67)	120 (.53)	36 (16.3)
B2400-1 1/2	600 (2.67)	150 (.67)	120 (.53)	39 (17.7)
B2400-2	1200 (5.34)	480 (2.14)	180 (.80)	93 (42.2)
B2400-2 1/2	1200 (5.34)	480 (2.14)	180 (.80)	106 (48.1)
B2400-3	1200 (5.34)	480 (2.14)	300 (1.33)	132 (59.9)
B2400-3 1/2	1200 (5.34)	480 (2.14)	300 (1.33)	151 (68.5)
B2400-4	1500 (6.67)	600 (2.67)	450 (2.00)	160 (72.6)
B2400-5	1500 (6.67)	600 (2.67)	450 (2.00)	192 (87.1)
B2400-6	1500 (6.67)	600 (2.67)	450 (2.00)	219 (99.3)
B2400-8	2000 (8.90)	800 (3.56)	600 (2.67)	297 (134.7)
B2400-10	2000 (8.90)	800 (3.56)	600 (2.67)	465 (210.9)
B2400-12	2000 (8.90)	800 (3.56)	600 (2.67)	560 (254.0)
B2400-14	2000 (8.90)	800 (3.56)	600 (2.67)	761 (345.2)
B2400-16	2000 (8.90)	800 (3.56)	600 (2.67)	861 (390.5)
B2400-18	2000 (8.90)	800 (3.56)	600 (2.67)	1297 (588.3)
B2400-20	2000 (8.90)	800 (3.56)	600 (2.67)	1426 (646.8)
B2400-24	2000 (8.90)	800 (3.56)	600 (2.67)	1682 (762.9)



4Dimension compatible fitting

Reference page 127 for general fitting and standard finish specifications.