

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

5" Round

Ceiling and Wall Mount

| Model & Size | Color Temp & CRI | Watt | Lumens | Finish |
|--------------|--------------------------------------|------|--------|--|
| ○ FM-05RN 5" | ○ 930 3000K - 90 ○ 935 3500K - 90 | 12W | 1050 | ○ BK Black ○ BZ Bronze ○ NI Nickel ○ WT White |

Example: **FM-05RN-930-BK**

DESCRIPTION

Ultra-slim flush mount that uses edge-lit technology and a translucent diffuser for uniform illumination without shadows or hotspots.

FEATURES


- Multiple LED array for uniform illumination
- Suitable for outdoor and coastal regions
- Dead front trim for shower applications
- Driver installed within the Junction Box, driver dimension: 2.25" dia x 1" deep
- 5 year warranty

SPECIFICATIONS


| | |
|------------------------|--|
| Construction: | Injection molded UV rated plastic with translucent diffuser for outdoor application |
| Power: | 12W |
| Input: | 120-277 VAC, 50/60Hz |
| Dimming: | ELV: 100-5% , TRIAC: 100-5% |
| Light Source: | Integrated LED |
| Lens: | Translucent acrylic diffuser |
| Mounting: | Installs over a 3", 4" or 3/0-4/0 hybrid junction box, Can be mounted on ceiling or wall in all orientations |
| Finish: | Enamel Coated: White, Nickel, Bronze, Black |
| Operating Temp: | -40°F to 122°F (-40°C to 50°C) |
| Standards: | ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2019 Compliant, ADA |



FINISHES:

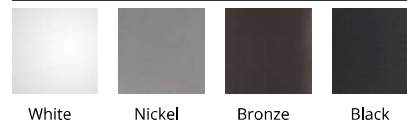

LINE DRAWING:

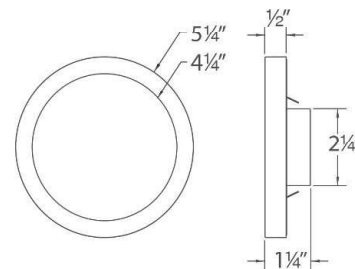

FM-05RN