




Z534
12 [305] DIAMETER HEAVY-DUTY
PARKING DECK DRAIN WITH SUPPORT FLANGE

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

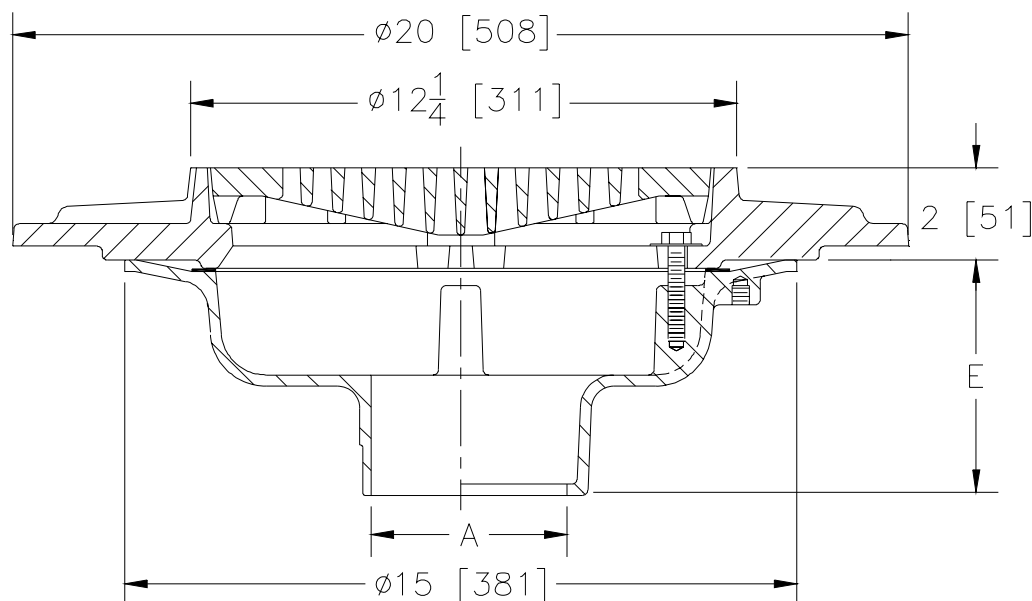

A- Pipe Size In.	Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm ²]
2-3-4-5-6 [51-76-102-127-152]	78 [35]	30 [194]
8-10 [203-254]	80 [36]	

ENGINEERING SPECIFICATION: ZURN Z534
12 [305] Diameter Parking Deck Drain, Dura-Coated cast iron body with bottom outlet, heavy duty gasketed drain support flange, with heavy-duty slotted grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6-8-10 [51 thru 152-203-254]
2 thru 4-6 [51 thru 102-152]
2 thru 6-8-10 [51 thru 152-203-254]
2 thru 6-8-10 [51 thru 152-203-254]
2 thru 4 [51 thru 102]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

'E' BODY HT. DIM.

5-1/4 [133]
5-1/4 [133]
3-3/4 [95]
5-1/4 [133]
4-5/8 [117]

PREFIXES

_____ Z D.C.C.I. Body and Top*
_____ ZB D.C.C.I. Body with Polished Bronze Top (Add 3/16 [5] to 2 [51] Dim and 3/4 [19] To 12-1/4 [311] Dim.)
_____ ZN D.C.C.I. Body with Polished Nickel Bronze Top (Add 3/16 [5] to 2 [51] Dim and 3/4 [19] To 12-1/4 [311] Dim.)

SUFFIXES

_____ -C Underdeck Clamp
_____ -G Galvanized Cast Iron
_____ -HP Heel-Proof Grate
_____ -SA Stabilizer Assembly (See Z1036)
_____ -TC Neo-Loc Test Cap Gasket
 (2 [51]-4 [102] NL Bottom Outlet Only)
_____ -TS Top Secured with Slotted Screws
_____ -VP Vandal-Proof Secured Top
_____ -XJ Expansion Joint (See Z190) (Use with IP Type Outlets)
_____ -Y Sediment Bucket

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. E DATE: 11/16/10 C.N. NO. 120454

DWG. NO. 58939 PRODUCT NO. Z534