




FABRIC LOOK



ST. GERMAIN™

Emulating the superb texture of fabrics found in the St. Germain district of Paris, this tile is available in a tapestry of six welcoming colors that also possess remarkably linear undertones. This contemporary, high-fashion tile has a unique capacity to complement many room accents thanks in part to its soft, comforting effect.



Cover photo features St. Germain Sable 24 x 24 on the floor.
Above photos feature St. Germain Sable 12 x 24 on the wall.

ST. GERMAIN™

COLORBODY™ PORCELAIN FLOOR

AMERICAN OLEAN®

FINISHES: TEXTURED

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER
FLOOR



EXTERIOR
FLOOR

MATERIAL



PC
COLORBODY
PORCELAIN

PRICING



LOW HIGH

SPECIAL FEATURES



STEPWISE™



TRUE EDGE™



MADE IN
THE U.S.A.



LARGE
FORMAT



MOSAIC/
DECO



ENCAUSTIC



TERRAZZO



PAVER




CUSTOMIZE

FABRIC LOOK

COLORBODY™ PORCELAIN FLOOR TILE




BLANC SE60 (1)

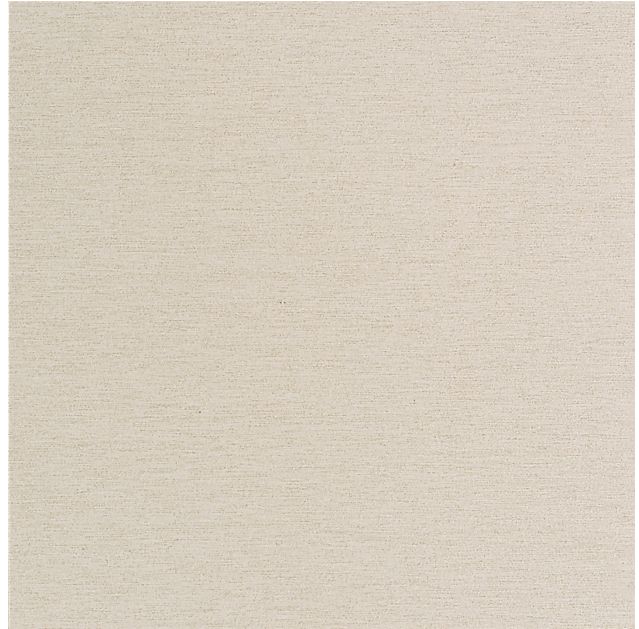

CREME SE61 (1)



SABLE SE64 (2)

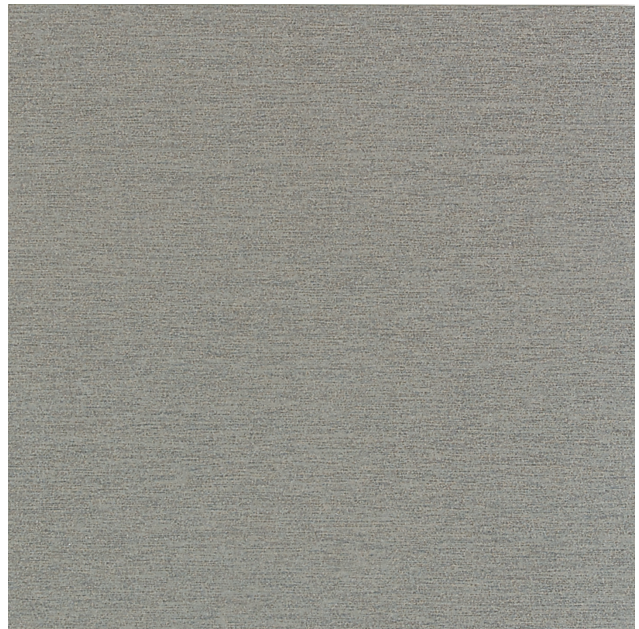

GRIS SE67 (1)

(1) & (2) notations indicate price group, (1) being the least expensive.



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT™



FIRE-RESISTANT



CLIMATEPRO™



SIMPLICLEAN™

VISIT AMERICANOLEAN.COM/WHYTILE FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

FINISHES: TEXTURED

USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR

MATERIAL

PC
COLORBODY
PORCELAIN

PRICING



LOW HIGH

SPECIAL FEATURES



STEPWISE*



TRUEEDGE*

MADE IN
THE U.S.A.LARGE
FORMATMOSAIC/
DECO

ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE

FABRIC LOOK

SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	24 x 24 Floor Tile	23-3/8" x 23-3/8" (59.44 cm x 59.44 cm)	5/16"	15.20	4
	12 x 24 Floor Tile	11-13/16" x 23-13/16" (30.00 cm x 60.48 cm)	5/16"	15.12	8

APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	●
Wet & Level – Interior Floor	≥ 0.42	●
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	●
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit americanolean.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

TRIM

			NUMBER	PIECES/ CARTON
	Floor Bullnose	3 x 12	S43C9	30
	Cove Base	6 x 12	S36C9T	20
	Cove Base Outcorner	6 x 1	SC36C9T	10

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

* Modular sizes

INSTALLATION

Grout Joint Recommendation	Shade Variation
Floor: 1/8" (3/16" when multiple sizes are installed in a modular pattern, and or when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	 MEDIUM (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	FLOOR RESULT
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: americanolean.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	④	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: americanolean.com/Factors.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to americanolean.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

FEATURES

POST-CONSUMER
RECYCLED MATERIALSPRE-CONSUMER
RECYCLED MATERIALS

MADE IN THE U.S.A.



REVEAL IMAGING®

CERTIFIED
PORCELAIN™
TILE
0.5% or less water absorptionZEROTOX
Healthy Homes | Healthy Planet

All or select items within this series meet the requirements for these qualifications.
For more information visit americanolean.com.

888.AOT.TILE

AMERICANOLEAN.COM

AMERICAN OLEAN®
PROVEN IN TILE™

©2021 AMERICAN OLEAN (03/21)