



The striking colorways and rich movement of Ironworx™ were inspired by molten metal as it is being forged. This porcelain tile brings to life the style and sophistication of metal in an easy to maintain finish. The matching Ridge pattern adds dimension and subtle texture making Ironworx the perfect centerpiece for floors and walls.






# IRONWORX™

*Glazed Porcelain*

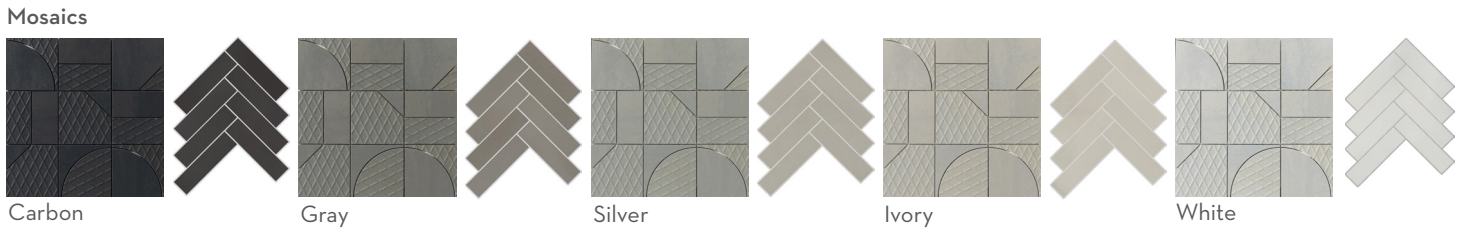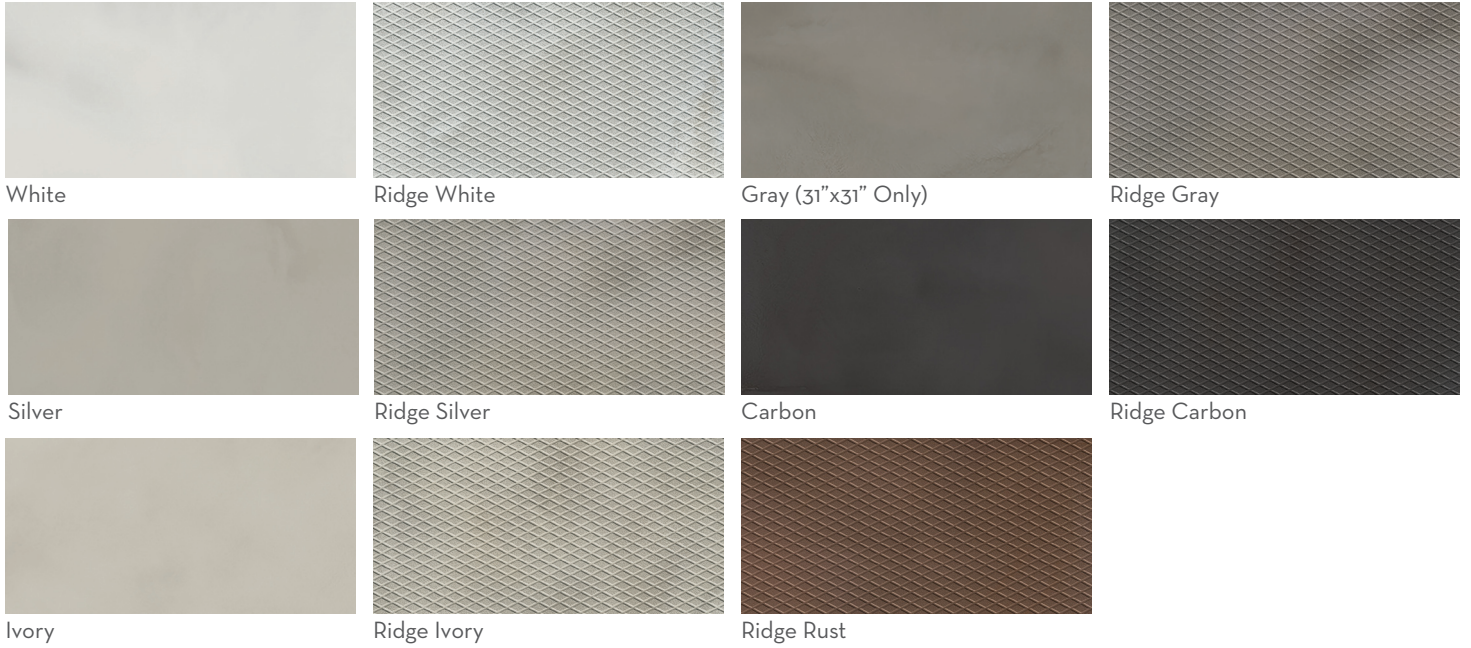


FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 



SIZES							
	31" x 31" 31.38" x 31.38"	12" x 23" 11.70" x 23.48"	12" x 12" Mesh	17" x 17" Mesh	3" x 12" Floor SBN		
	Thickness	9mm	9mm	9mm	9mm	Check Website	
	Faces	18	72 36 (Ridge Pattern)	Check Website	N/A	N/A	
	Finish	Matte	Matte	Matte	Matte	Matte	
	Edge	Rectified	Rectified	Cut	Cut	Cut/Rounded	
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"		
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>350 lbf	Resistant	<0.5%	>0.60 (Flat) <0.42 (Ridge)	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



-  Sustainability Attributes
- Red List Free
  - Health Product Declaration (HPD) provided upon request
  - Product Packaging is 100% recyclable
  - VOC Free
  - Recycled Content 9.8-39.6% Pre-Consumer and 0% Post-Consumer

\*For more information visit [www.emser.com](http://www.emser.com). Always consult a professional for proper usage and installation.

