John-Richard

STYLE NO.:AJC-9405

Parts and Hardware List

A.	Ceiling Assembly	1PC
B.	Mounting screw	2PCS
C.	Universal bar	1PC
D.	Outlet box screw	2PCS
E.	Wire nut	3PCS
F.	Green ground screw	1PC
G.	Column nut	2PCS

Please make sure that you have all the parts indicated before you begin assembling this item.

Please read Wiring Instructions before you begin assembling and installing your Ceiling Lamp. NOTE: BRAIDED CORD COVER FRAYS EASILY, if wire rope screws are not loosened before adjusting hang height, cord cover will fray.

WARNING: BEFORE INSTALLING, make sure the electricity supply is shut off to avoid a possible electric shock.

Assembly Instruction

1.Take the parts carefully out of the carton, place them on a flat surface, and make sure that the parts will not be damaged.
2. Remove the Column Nuts(G) under the Canopy from the Mounting Screws(B), and take out the Universal Bar(C). Attach the Universal Bar(C) to the Outlet Box by using two Outlet Box Screws(D). (See Figure1)
3.Install the ground wire in the Universal Bar(C) with the supplied Green Ground Screw(F).
4.Loosen wire rope screws and adjust desired hang height by carefully pulling braided cord through canopy.Tighten plastic screws. NOTE:BRAIDED CORD COVER FRAYS EASILY,if wire rope screws are not loosened before adjusting hang height,cord cover will fray. (See Figure1)
5. Place the null wire, ribbed wire evenly against the ribbed wire from the Outlet Box and place the live wire, smooth wire evenly against the smooth wire from the Outlet Box. (Connecting the Wires-See Figure 2)
6. After the wires are connected, tuck them carefully inside the Outlet Box. Attach the Ceiling Assembly(A) to the Universal Bar(C) and secure with two Column Screws(G). (See Figure 1)

To clean,wipe with soft dry cloth.

NOTE: THE DRAWING OF THE LAMP BODY IS FOR REFERENCE ONLY.

John-Richard

Style NO.: AJC-9405

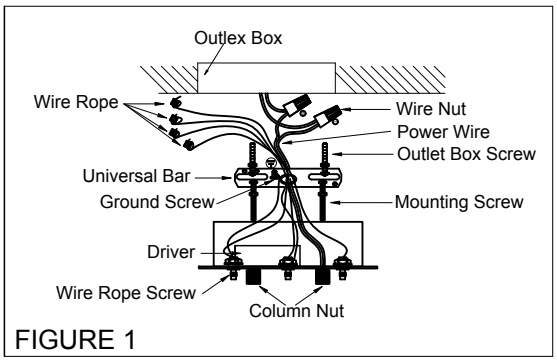


FIGURE 1

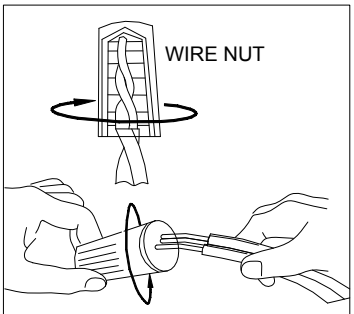


FIGURE 2-Wire Nut

