

Metallic Fixture Whips

Reduced Wall Galvanized Steel Flexible Conduit



Conduit

- Reduced Wall Galvanized Steel Flexible Metal Conduit

Conductors

- Solid or Stranded Copper

Conductor Insulation

- THHN/THWN: 14 AWG & 12 AWG
- TFN: 18 AWG & 16 AWG

Neutral Conductors

- White 120/208V

Grounding

- Insulated Green Copper Grounding Conductor¹

References & Rating



- UL 66, 83 and 514B, File No. E96572
- NEC® 348
- Made in USA of US and/or imported materials

Maximum Temperature Rating

- 90°C (Dry)

Maximum Voltage Rating

- 600V

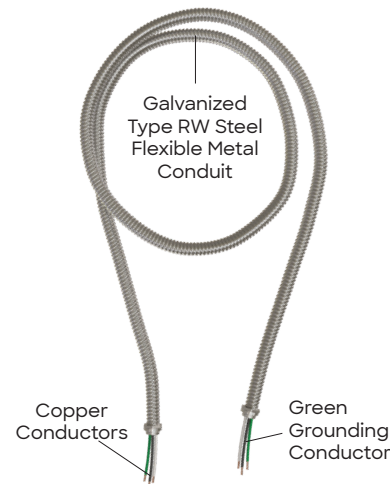

Conductor Trade Size (Color)	Conduit Trade Size x Length (ft)	Product Code	
		30 Units Per Package	100 Units Per Package
Solid			
18-4 Solid (Black, White, Red, Green)	¾ x 6	4523-21	4523-30
18-3 Solid (Black, White, Green)	¾ x 6	4522-21	4522-30
18-2 Solid (Black, White)	¾ x 6	4521-21	4521-30
16-4 Solid (Black, White, Red, Green)	¾ x 6	4513-21	4513-30
16-3 Solid (Black, White, Green)	¾ x 6	4512-21	4512-30
16-2 Solid (Black, White)	¾ x 6	4511-21	4511-30
14-4 Solid (Black, White, Red, Green)	¾ x 6	4503-21	4503-30
14-3 Solid (Black, White, Green)	¾ x 6	4502-21	4502-30
14-2 Solid (Black, White)	¾ x 6	4501-21	4501-30
12-4 Solid (Black, White, Red, Green)	¾ x 6	4580-21	4580-30
12-3 Solid (Black, White, Green)	¾ x 6	4579-21	4579-30
12-2 Solid (Black, White)	¾ x 6	4578-21	4578-30
Stranded			
18-4 Stranded (Black, White, Red, Green)	¾ x 6	4623-21	4623-30
18-3 Stranded (Black, White, Green)	¾ x 6	4622-21	4622-30
18-2 Stranded (Black, White)	¾ x 6	4621-21	4621-30
16-4 Stranded (Black, White, Red, Green)	¾ x 6	4613-21	4613-30
16-3 Stranded (Black, White, Green)	¾ x 6	4612-21	4612-30
16-2 Stranded (Black, White)	¾ x 6	4611-21	4611-30
14-4 Stranded (Black, White, Red, Green)	¾ x 6	4603-21	4603-30
14-3 Stranded (Black, White, Green)	¾ x 6	4602-21	4602-30
14-2 Stranded (Black, White)	¾ x 6	4601-21	4601-30
12-4 Stranded (Black, White, Red, Green)	¾ x 6	4680-21	4680-30
12-3 Stranded (Black, White, Green)	¾ x 6	4679-21	4679-30
12-2 Stranded (Black, White)	¾ x 6	4678-21	4678-30

Note: Special orders are subject to lead times and minimum order quantities.

3/8" whips have screw in die cast connectors on the 18 AWG, 16 AWG & 14 AWG and set screw die cast for the 12 AWG.

Available with customer specified connectors by special order.

All whips are available in barrels and cartons.

¹Two wire configuration do not have an insulated green copper grounding conductor.

Continues on next page

Metallic Fixture Whips

Reduced Wall Galvanized Steel Flexible Conduit



Conductor Trade Size (Color)	Conduit Trade Size x Length (ft)	Product Code	
		15 Units Per Package	50 Units Per Package
Solid			
14-4 Solid (Black, White, Red, Green)	½ x 6	4703-15	4703-24
14-3 Solid (Black, White, Green)	½ x 6	4702-15	4702-24
14-2 Solid (Black, White)	½ x 6	4701-15	4701-24
12-4 Solid (Black, White, Red, Green)	½ x 6	4706-15	4706-24
12-3 Solid (Black, White, Green)	½ x 6	4705-15	4705-24
12-2 Solid (Black, White)	½ x 6	4704-15	4704-24
Stranded			
14-4 Stranded (Black, White, Red, Green)	½ x 6	4803-15	4803-24
14-3 Stranded (Black, White, Green)	½ x 6	4802-15	4802-24
14-2 Stranded (Black, White)	½ x 6	4801-15	4801-24
12-4 Stranded (Black, White, Red, Green)	½ x 6	4806-15	4806-24
12-3 Stranded (Black, White, Green)	½ x 6	4805-15	4805-24
12-2 Stranded (Black, White)	½ x 6	4804-15	4804-24

Note: Special orders are subject to lead times and minimum order quantities.

½" whips have screw in die cast connectors.

Available with customer specified connectors by special order.

All whips are available in barrels and cartons.

*Two wire configuration do not have an insulated green copper grounding conductor.