

CyberPower

GX950UC-E STANDBY UPS SYSTEM



Protects high end electronics from power interruptions and power surges.

The CyberPower GX950UC-E uninterruptible power supply (UPS) is designed to protect console gaming systems by providing reliable battery backup and surge protection. In the event of a power outage, it supplies enough power to let you keep playing through brief interruptions or safely shut down your console during a longer outage—helping to prevent game progress loss and protect your hardware. It also shields connected devices, such as home theater systems and networking equipment, from lightning strikes and other harmful power surges.

The GX950UC-E features a multi-color light bar with customizable colors and effects modes to adapt into your gaming set-up. The GX950UC-E has one USB-A and one USB-C charging port with 17W shared total output which gives you a faster charging time and can be used while on battery backup power. The slim profile allows for discrete installation and keyhole mounting slots allow for wall-mount applications.

With a \$125,000 connected equipment guarantee and a three-year warranty, you can trust CyberPower's commitment to the quality of the GX950UC-E.

TYPICAL APPLICATIONS

- Gaming Systems
- Laptop Computers
- Powering small electronics
- Home Networking
- Routers & Modems
- Personal Electronics

FEATURES


- Capacity: 950VA / 510W
- Topology: Standby
- Waveform: Simulated Sine Wave
- Output: 120 VAC +/- 5%
- Runtime (half/full): 7 minutes / 1 minute
- Plug type & cord: NEMA 5-15P, 5-ft. cord
- Outlets: 7 (2 surge only, 5 surge + battery backup)
- Outlet types: NEMA 5-15R
- USB-A charge ports: 1 (2.4A)
- USB-C charge ports: 1 (15W)
- Surge Protection: 890J
- ENERGY STAR® certified: Yes
- Warranty: Three-Year
- Connected Equipment Guarantee: \$125,000

SPECIFICATIONS

GENERAL	
Energy Saving	GreenPower UPS™ High-Efficiency
ENERGY STAR® certified	Yes
UPS Topology	Standby
INPUT	
Circuit Breaker	15 A
Cord Length	5 ft (1.5 m)
Input Frequency Range	47 Hz - 53 Hz / 57 Hz - 63 Hz
Input Plug Type	NEMA 5-15P
Nominal Input Voltage	115 - 125 VAC
Plug Style	Right Angle - 45° Offset

OUTPUT	
On Battery Frequency	50/60 Hz +/- 1% (auto-sensing)
On Battery Voltage	120 VAC +/- 5%
On Battery Waveform	Simulated Sine Wave
Outlet Type	7 x NEMA 5-15R
Outlets - Battery & Surge Protected	5
Outlets - Surge-Only Protected	2
Outlets - Widely-Spaced	2
Outlets - Total	7

GX950UC-E
STANDBY UPS SYSTEM

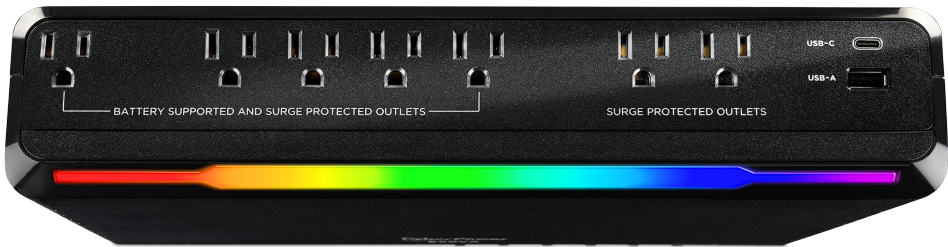

SPECIFICATIONS CONT.

OUTPUT CONT.	
Output Power Factor	0.54
Overload Protection	Internal Circuitry Limiting Circuit Breaker Protected
Typical Transfer Time	8 ms
USB Charge Port	Yes
USB Charge Port Amperage	2.4 Amps (Shared)
USB Charge Port Quantity	2
USB Charge Port Type	1 x Type A 1 x Type C
USB Charge Port Voltage	5 VDC
USB Charge Port Watts	17 Watts
VA	950 VA
Watts	510 W
BATTERY	
Battery Quantity	1
Battery Size	12 V / 6.5 Ah
Battery Type	Sealed Lead-Acid Battery
Runtime at Full Load	1 minute
Runtime at Half Load	7 minutes
Typical Recharge Time	8 hours
SURGE PROTECTION & FILTERING	
EMI/RFI Filtration	Yes
Surge Suppression	890 J
MANAGEMENT & COMMUNICATIONS	
Audible Alarms	Battery Mode / Low Battery Overload / Fault
LED Indicators	Power On / Wiring Fault
PHYSICAL	
Color	Black
Form Factor	Compact
Material of Construction	Plastic

PHYSICAL DIMENSIONS	
Physical Dimensions - Width/Height/Depth (cm)	32.41 x 13.79 x 7.01 cm
Physical Dimensions - Width/Height/Depth (mm)	324 x 138 x 70 mm
Physical Dimensions - Width/Height/Depth (in.)	12.76 x 5.43 x 2.76 in.
Weight (kg)	3.2 kg
Weight (lb)	7.05 lbs.
SHIPPING DIMENSIONS	
Shipping Dimensions - Width/Height/Depth (cm)	35.56 x 17.15 x 14.92 cm
Shipping Dimensions - Width/Height/Depth (mm)	355.6 x 171.45 x 149.23 mm
Shipping Dimensions - Width/Height/Depth (in.)	14 x 6.75 x 5.875 in.
Weight (kg)	3.63 kg
Weight (lb)	8 lbs.
ENVIRONMENTAL	
Operating Elevation	0 - 10,000 ft (0 - 3,048 m)
Operating Relative Humidity	0 - 95% (non-condensing)
Operating Temperature	32 - 104 °F (0 - 40 °C)
Storage Elevation	0 - 50,000 ft (0 - 15,239 m)
Storage Relative Humidity	0 - 95% (non-condensing)
Storage Temperature	5 - 113 °F (-15 - 45 °C)
CERTIFICATIONS	
Environmental	RoHS Compliant
Safety	UL1778 / cUL FCC DOC Class B / CEC
WARRANTY	
CEG Amount	\$125,000
Connected Equipment Guarantee	Lifetime
Extended Warranty Option	WEXT5YR-U1A
Product Warranty	3-Year Limited Warranty