



Location:

SWM0153270010(TRM), SWM01532700BODY

Wall Mounted Lavatory Faucet



Specification Submittal

Model Number		Specification
☐ SWM0153270010	Wall Mounted Lavatory Faucet	- Wall mounted lavatory faucet featuring two hole mounting configuration. - Ceramic cartridge. - Standard 1.0 gpm (3.8 L/min) flow rate. - Components made from brass and nonmetallic materials plated in standard Polished Chrome finish. Note: Requires hot and cold inlet piping to be reversed. 
☐ SWM01532700BODY	Wall Mounted Lavatory Faucet Valve Body Mount	
☐ SWM0153270010TRM	Wall Mounted Lavatory Faucet, Trim Only	
Modifications		Compliance
☐ 05	0.5 gpm (1.9 L/min) flow regulator	- ASME A112.18.1/CSA B125.1. - NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372. - WaterSense 1.0 gpm (3.8 L/min).  
☐ G	Grid drain	
Note: Append appropriate suffix to model number.		Warranty
		Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 

Architectural/Engineering Specification

Symmons DS Creation _____ Features include wall mounted lavatory faucet featuring two hole mounting configuration, ceramic cartridge and standard 1.0 gpm (3.8 L/min) flow rate. Components made from brass and nonmetallic materials plated in standard Polished Chrome finish. 10-Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, WaterSense 1.0 gpm (3.8 L/min). complaint. Available options include: 05 = 0.5 gpm (1.9 L/min) flow regulator, and G = Grid drain.

Dimensions

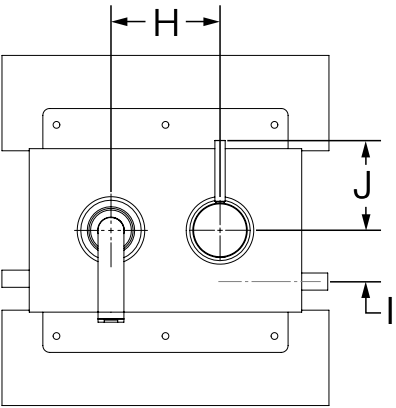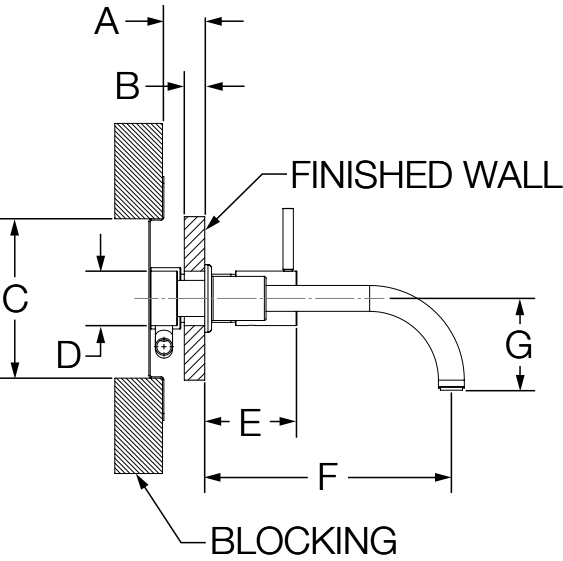

Measurements	
A	Min. 1-1/2", 38 mm Max. 1-3/4", 44 mm
B	Max. 3/4", 19 mm
C	Min. 5-7/8", 149 mm
D	(2x) Hole Size Min. Ø 2", 51 mm Max. Ø 2-1/4", 57 mm
E	3-3/8", 86 mm
F	9", 229 mm
G	3-3/8", 86 mm
H	4", 102 mm
I	(2x) 1-7/8", 48 mm
J	3-5/16", 84 mm

Note: Dimensions subject to change without notice.