

'Z' & Wing Fittings


B515
Adjustable Offset Gussetted Z-Support
- Standard finishes: ZN, GRN
- Wt./C 93 Lbs. (42.2 kg)

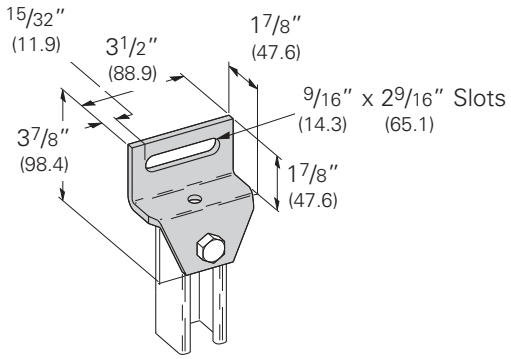


B428
Eight Hole Gussetted Corner Connection
- Standard finishes: ZN, GRN
- Wt./C 203 Lbs. (92.1 kg)

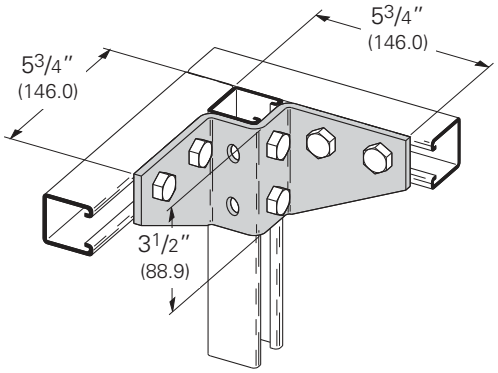


B267R
Three Hole Single Corner Connection (Right Hand)
- Standard finishes: ZN, GRN
- Wt./C 54 Lbs. (24.5 kg)




B267L
Three Hole Single Corner Connection (Left Hand)
- Standard finishes: ZN, GRN
- Wt./C 54 Lbs. (24.5 kg)




B270R
Four Hole Single Corner Connection (Right Hand)
- Standard finishes: ZN, GRN
- Wt./C 77 Lbs. (34.9 kg)

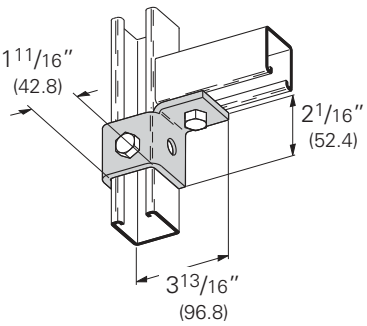


B270L
Four Hole Single Corner Connection (Leftt Hand)
- Standard finishes: ZN, GRN
- Wt./C 77 Lbs. (34.9 kg)

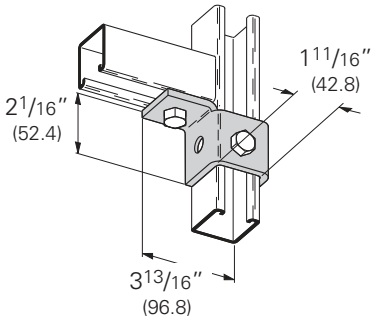

B268R
Five Hole Single Corner Connection (Right Hand)
- Standard finishes: ZN, GRN
- Wt./C 100 Lbs. (45.3 kg)

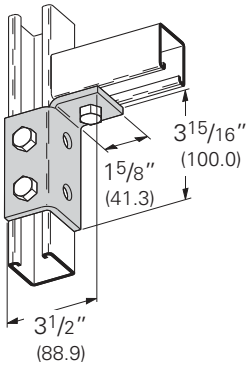

B268L
Five Hole Single Corner Connection (Left Hand)
- Standard finishes: ZN, GRN
- Wt./C 100 Lbs. (45.3 kg)

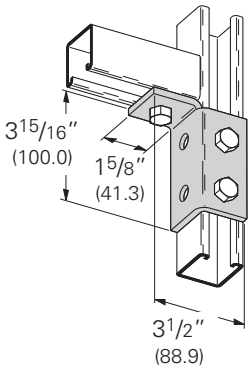

Reference page 106 for general fitting and standard finish specifications.