


T-24V-60W-PI

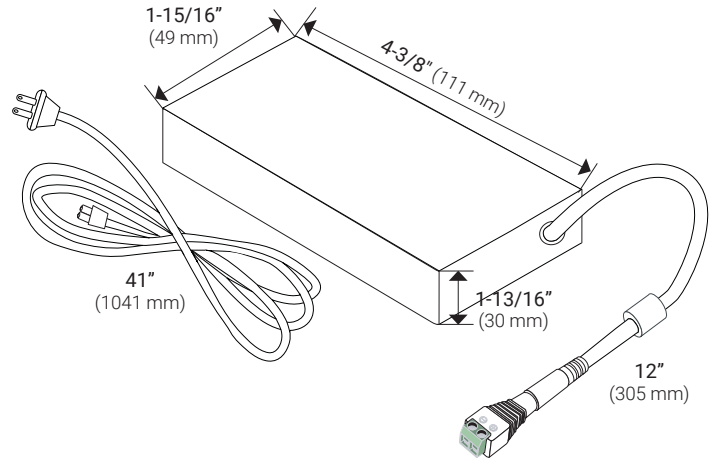

60 WATT PLUG-IN POWER SUPPLY

PART NUMBER	DESCRIPTION	DIMENSIONS	AC POWER CORD LENGTH	DC CORD LENGTH	VOLTS	AMPS
T-24V-60W-PI	60 watt AC/DC 2 prong plug-in, 24-volt DC 2.5 AMP	6-5/16" x 2-1/16" x 1-1/4" 130.18 mm x 52.39 mm x 31.75 mm	41" (3 ft. 5") 1041 mm	12" (1 ft.) 305 mm	24	2.5

FEATURES

- No hardwiring required – use an existing hidden outlet
- Easily extend wire between fixture and power supply with Female Barrel Connector (T-FBC)
- Dims on the 24-volt or secondary side with switches, sensors, or the Wireless Dimming System
- 24-volt power supplies over 60 watts are UL Listed for commercial use, and are not UL Class 2 Listed for residential
- 3-year limited warranty
- Designed for indoor application

TECHNICAL INFORMATION

Series	Plug-in Power Supply Series
Input Voltage	120 volt AC
Output Voltage	24-volt DC
Output Wattage	60 watts
Dimmable	Non-dimmable
Rating	UL Listed in USA/Canada
Rated Life	30,000 hrs
Mounting	Free placement
Operating Temperature	32°F to 104°F (0°C to 40°C)
Environment	Dry location
Construction Material	Plastic housing
Warranty	3 years

INSTALLATION LOCATIONS

- Above Cabinet / Open Soffits
- Interior Wall Cabinet
- Base Cabinets
- Open Coves
- Any Available & Accessible Outlets

DO NOT INSTALL IN AN ATTIC