







Location:



S4994TRM  
Tub/Hand Shower Trim  
**Specification Submittal**

<p><b>Model Numbers</b></p>	<p><b>Options/Modifications</b></p>
<p><input type="checkbox"/> <b>S4994TRM</b> Tub/Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately</p>	<p><input type="checkbox"/> <b>MB</b> Matte Black finish  <input type="checkbox"/> <b>STN</b> Satin Nickel finish  <input type="checkbox"/> <b>15</b> 1.5 GPM (5.7 L/Min) aerator  <input type="checkbox"/> <b>L2</b> Less hand shower (wand only)  <input type="checkbox"/> <b>L5</b> Less handle shower system (less bar/cradle, hose, wand and elbow)  <input type="checkbox"/> <b>L7</b> Less handle  <input type="checkbox"/> <b>TC</b> With TA-10 flow control spindle + T-12A Assembly</p>
<p><b>Feature Highlights</b></p>	<p><b>Warranty</b></p>
<ul style="list-style-type: none"> <li>Requires Temptrol® Pressure Balancing Shower Valve</li> <li>Metal lever handle</li> <li>Tub spout included</li> <li>Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap</li> <li>2.0 GPM (7.6 L/min) flow rate standard</li> <li>Integral diverter control</li> <li>30" slide bar</li> <li>60" flexible metal hose</li> <li>1 mode hand shower</li> <li>Dual checks for back flow protection</li> </ul>	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 
<p><b>Compliance</b></p>	
<ul style="list-style-type: none"> <li>ASME A112.18.1/CSA B125.1</li> <li>Lever handle meets ADA requirements</li> </ul>  	

**SKU Builder**


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S4994	STN	L7	15	TRM		S4994STNL715TRM
S4994	MB			TRM	TC	S4994MBTRMTC

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

**Architectural/Engineering Specification**

Symmons \_\_\_\_\_ Includes Verity tub and hand shower trim powered by the Temptrol® Pressure Balancing Shower Valve, featuring metal lever handle, tub spout, 1 mode hand shower with standard 2.0 gpm (7.6 L/min) flow restrictor, diverter tub spout, 60" metal hose, integral diverter control, dual check valve for back flow protection, and 30" slide bar. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant and lever handle meets ADA compliance. Available options: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower", "L5 - Less handshower system (Less bar/ cradle, hose, wand and elbow", "L7 - Less handle", "STN - Satin Nickel finish", "MB - Matte Black finish", "TC - Test Cap Trim".

## Dimensions

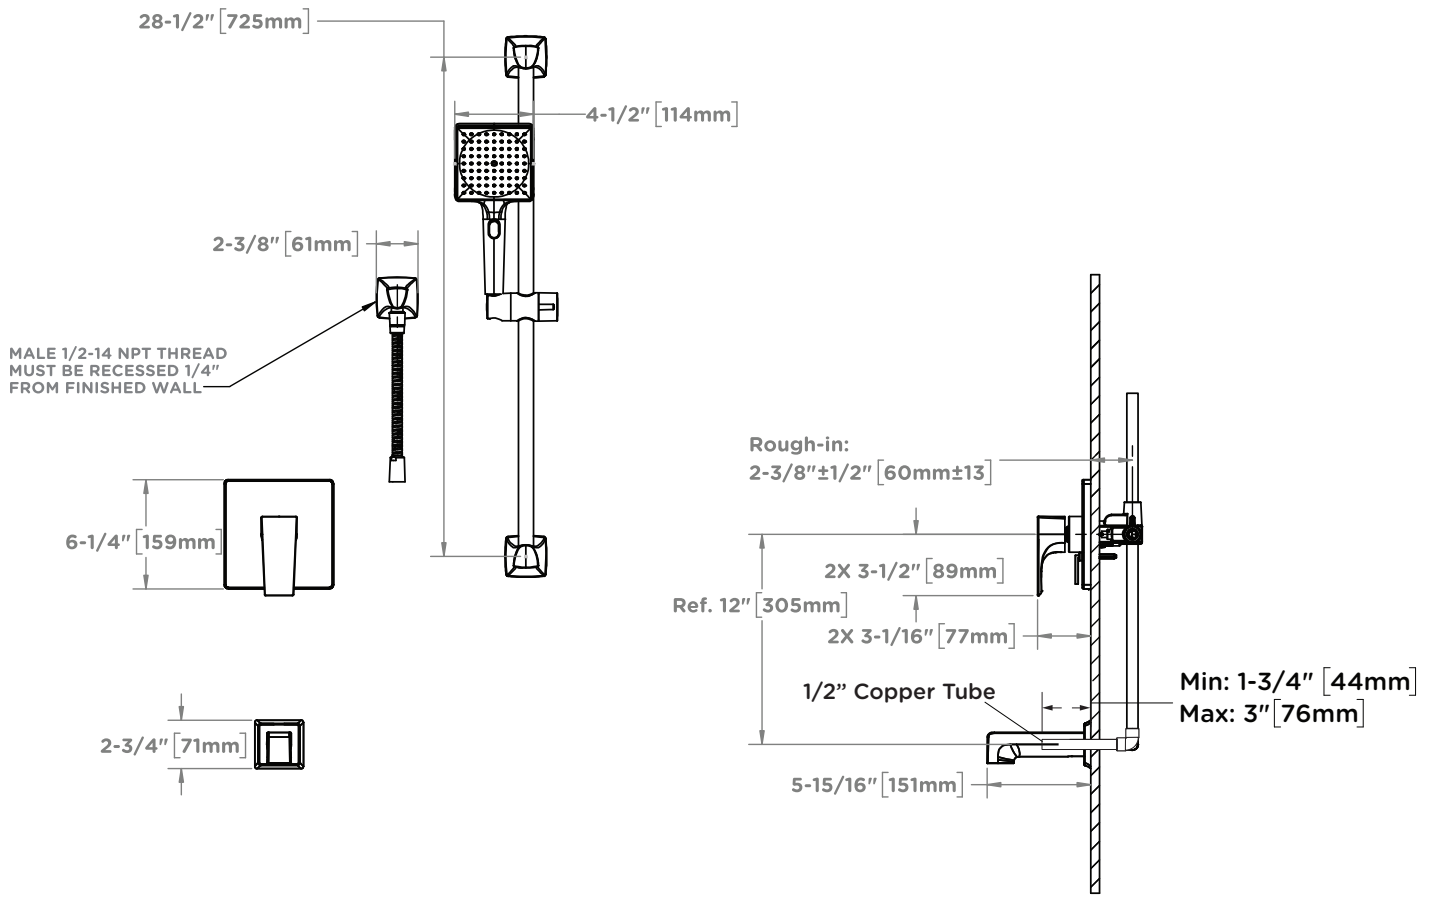

### Notes:

- 1) All dimensions measured from nominal rough-in.
- 2) Dimensions are subject to change without notice.