

SST4836TR 1.125 RH RF – COMPLIANT SHOWER


With Seat

Interior: 48 x 36 x 76 $\frac{5}{8}$

Exterior: 52 $\frac{1}{8}$ x 38 $\frac{1}{8}$ x 78 $\frac{3}{4}$

inches

The SST4836TR 1.125 RH RF roll-in shower features innovative installation design, including an engineered leveled base and improved front threshold with molded integral linear trench drain. A true time and money saver, our pre-leveled base lets you install directly on a **level** floor. And its front threshold is engineered to keep a constant level with the innovative nailing flange.

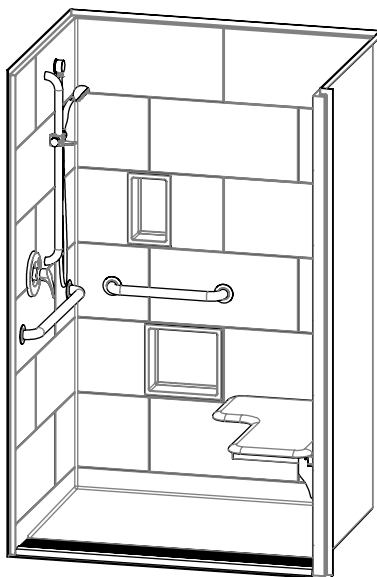

Shown fully-equipped

COLOR & TRIM OPTIONS

Stock

White

**Additional custom colors available.
(Contact Customer Service)

FEATURES

- Pre-leveled base
 - Solid Surface
 - 1 $\frac{1}{8}$ " skirt
 - Barrier free when properly installed
 - Smooth subway tile wall
 - Center front drain outlet
 - Integral front trench drain
 - Right-Side 90 degree return flange for clear floor space
 - 30-year warranty*
- * See terms and conditions for details

OPTIONS

- Grab bars
- Fold-up seat
- Hand-held shower assembly with slide bar
- Pressure balancing mixing valve
- Large soap dish
- Small soap dish
- Curtain rod and/or shower curtain, shipped loose

CODE COMPLIANCE

- FHA
- ICC/ANSI A117.1
- HUD UM73a
- ANSI Z124.1.2
- CAN/CSA-B45-02

**Code compliant when fully equipped and installed according to guidelines.

asura
Trench Drain Collection
by Comfort Designs




SST4836TR 1.125 RH RF

With Seat

Interior: 48 x 36 x 76 5/8
Exterior: 52 1/8 x 38 1/8 x 78 3/4
inches



ANSI compliant when fully equipped and installed according to guidelines.

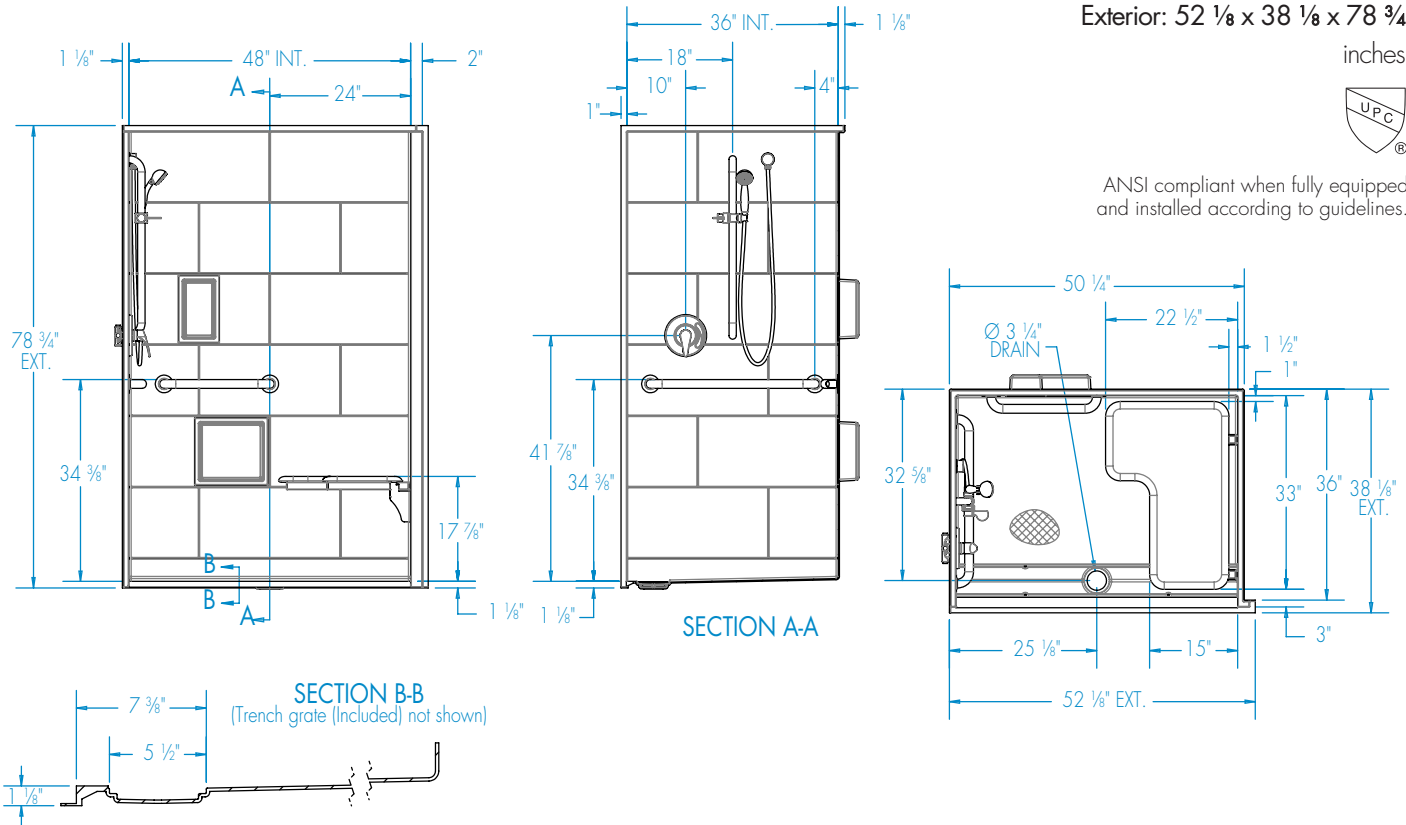

FEATURES

lbs

Dimensional Tolerance $\pm 3/8"$. Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type and Model #	Material	Wall Finish	Pieces	Drain	Dam/Skirt Height	Net Wt.	Pkg. Wt.
Shower SST4836TR 1.125 RH RF	Solid Surface	Smooth tile	1	Center Front	1 1/8" skirt	160	170


DIMENSIONS

Specifications	inches
Width: Ext. / Int.	52 1/8 / 48
Depth: Ext. / Int.	38 1/8 / 36
Height: Ext. / Int.	78 3/4 / 76 5/8
Enclosure Opening:	48
Skirt Height:	1 1/8
Drain Rough-In (from Back Wall)	32 5/8
Drain Rough-In (from Side Wall)	25 1/8

FRAMING DIMENSIONS

inches

Type	D1 Depth	D2 Depth (RF Side)	W Width	H Height	A	B	C
Alcove	38 1/8	36	50 1/2	—	Box Out	25 1/8	32 5/8

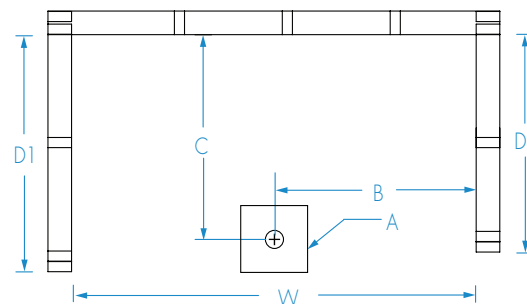

Note: Depth on recessed flange side should only be 36" and opposite side should be 38 1/8"