

FM-30213


Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Grommet

FM-30213

**PRODUCT DESCRIPTION**

An octagonal geometric ceiling luminaire with a chiseled profile. ACLED state of the art technology projects through irresistible mouth blown etched opal glass. Integral coloradjustability allows you to choose warm white, crisp white or cool light for your space.

**FEATURES**

- ACLED driverless technology
- Octagonal geometric profile
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
<b>Input</b>	120 VAC,50/60Hz
<b>Dimming</b>	ELV: 100-5%,TRIAC: 100-5%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	3500K,2700K,3000K
<b>CRI</b>	90
<b>Construction</b>	Die cast aluminum body and mouth blown opal glass shade


**REPLACEMENT PARTS**

RPL-GLA-30213 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-30213 13"	2700K	AB Aged Brass	21W	1800	1051
	3000K	AB Aged Brass	21W	1800	1120
	3500K	AB Aged Brass	21W	1800	1136

Example: **FM-30213-35-AB**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)

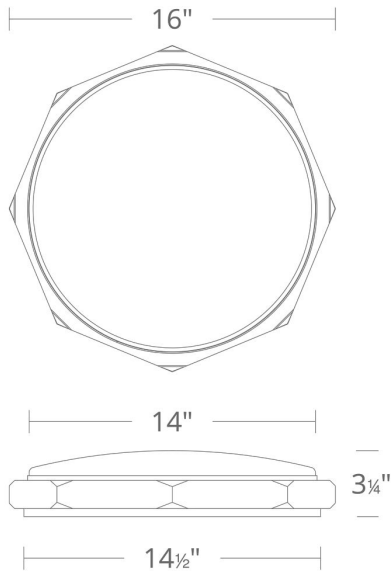

FM-30216


Project:

Location:

Fixture Type:

Catalog Number:

**AVAILABLE FINISHES:**



## Grommet

FM-30216

**PRODUCT DESCRIPTION**

An octagonal geometric ceiling luminaire with a chiseled profile. ACLED state of the art technology projects through irresistible mouth blown etched opal glass. Integral coloradjustability allows you to choose warm white, crisp white or cool light for your space.

**FEATURES**

- ACLED driverless technology
- Octagonal geometric profile
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field

**SPECIFICATIONS**

<b>Rated Life</b>	54000 Hours
<b>Standards</b>	ETL, cETL,Damp Location Listed,Title 24 JA8: 2019 Compliant
<b>Input</b>	120 VAC,50/60Hz
<b>Dimming</b>	ELV: 100-5%,TRIAC: 100-5%
<b>Mounting</b>	Can be mounted on ceiling or wall in all orientations
<b>Color Temp</b>	2700K,3000K,3500K
<b>CRI</b>	90
<b>Construction</b>	Die cast aluminum body and mouth blown opal glass shade

**REPLACEMENT PARTS**

RPL-GLA-30216 - Glass

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
FM-30216 16"	2700K	AB Aged Brass	27W	2400	1534
	2700K	BN Brushed Nickel	27W	2400	1534
	2700K	PN Polished Nickel	27W	2400	1534
	3000K	AB Aged Brass	27W	2400	1639
	3000K	BN Brushed Nickel	27W	2400	1639
	3000K	PN Polished Nickel	27W	2400	1639
	3500K	AB Aged Brass	27W	2400	1649
	3500K	BN Brushed Nickel	27W	2400	1649
	3500K	PN Polished Nickel	27W	2400	1649

Example: **FM-30216-35-PN**

For custom requests please contact [customs@modernforms.com](mailto:customs@modernforms.com)