



## SPL6QT SOUNDBAR DATA SHEET

### SPL6QT TECHNICAL SPECIFICATIONS

<b>UOM</b>	<b>SPL6QT</b> Each
<b>Tweeter</b>	0.75" (19mm) Aluminum
<b>Woofer</b>	6.5" (165mm) Low Profile
<b>Frequency Response</b>	60Hz-24kHz +/-3dB
<b>Impedance</b>	4 - 8 ohms (woofer quantity dependent)
<b>Power Handling (RMS)</b>	50 watts minimum; 200 watts maximum
<b>Sensitivity (2.83V/1m)</b>	91dB SPL
<b>Enclosure</b>	Aircraft Grade Aluminum
<b>Width (W)</b>	Built to Order (minimum required width depends on model configuration)
<b>Dims (Depth x H)</b>	4" x 8.125" (101.6mm x 206.38mm)
<b>Shipping Weight</b>	Dependent on width

### SPL6QT WIDTHS/HEIGHT

**SPL6-C Minimum Width:**  
27-35.99" to match displays 32-41"  
36-96" to match displays 42-110"

**SPL6-CS Minimum Height:**  
26.5-34.39" to match displays 55-69"  
34.5-40.49" to match displays 70-82"  
40.5-56.49" to match displays 83-114"  
56.5-96" to match displays 115-190"


**SPL6-LCR Minimum Width:**  
43-55.99" to match displays 50-64"  
56-71.99" to match displays 65-82"  
72-96" to match displays 75-110"

**SPL6-LR Minimum Width:**  
26-35.99" to match displays 30-41"  
36-71.99" to match displays 42-82"  
72-96" to match displays 83-110"


**SPL6-LRSUB Minimum Width:**  
39-55.99" to match displays 45-64"  
56-71.99" to match displays 65-82"  
72-96" to match displays 83-110"

### SPL6QT FEATURES


- Built-to-order application and configuration to perfectly match TV
- Paintable grille available by request only
- LR, LRSUB, LCR, C, CS configurations
- Available in standard or marine grade
- Through-hole mount, TV mount, or wall mount options, mounting brackets sold separately

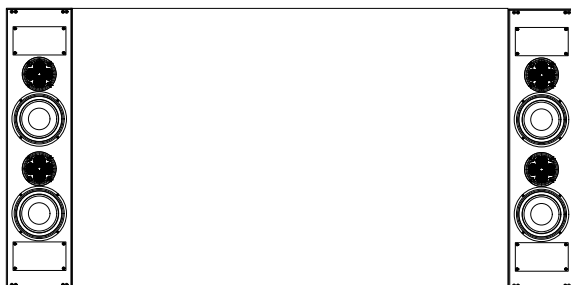

SPL6QT-CS Built to Order for 70-82" TV  
**Front View**




SPL6QT-C Built to Order for 42-110" TV  
**Front View**



SPL6QT-LCR Built to Order for 75-110" TV  
**Front View**



SPL6QT-LR Built to Order for 83-100" TV  
**Front View**



SPL6QT-LRSUB Built to Order for 83-100" TV  
**Front View**

SPL-QT models feature panels on the front baffle that provide access during product manufacturing for improved build consistency. Not field-serviceable.

**LIMITED FIVE (5) YEAR WARRANTY** Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2024 Sonance. All rights reserved. Sonance is a registered trademarks of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at [www.sonance.com](http://www.sonance.com).

JAMES by SONANCE • 2185 Park Place • Minden, NV 89423 • USA • PHONE: (775) 461-7500 • [www.jamesloudspeaker.com](http://www.jamesloudspeaker.com)

11.05.2024