

Material	Polypropylene (PP)	Closure Type	Child Resistant (CRC)
Size	45-400	Assembly Type	Pictorial CRC
Part Weight	9.60 g ± 1.5 g	Torque	17-27 in-lbs

DIMENSIONS

OD	2.044" (51.92 mm)	OAH	0.698" (17.73 mm)
E	1.658" (42.11 mm)	T'	1.752" (44.50 mm)
H (Inner)	0.385" (9.78 mm)	H (Seated)	0.548" (13.92 mm)

THREAD / FINISH


Threads per inch	6	Pitch	0.167" (4.24 mm)
Thread Engagement	~380° full depth	Thread Type	Continuous Thread

RECOMMENDED NECK FINISH

E	1.631" (41.43 mm)	T	1.725" (43.82 mm)
S	0.046" (1.17 mm)	H	0.405" MIN
H1	0.570" MIN	B	1.820" MAX

TOLERANCE

Standard Tolerance	±0.010-0.020 in (varies by dimension)
--------------------	---------------------------------------

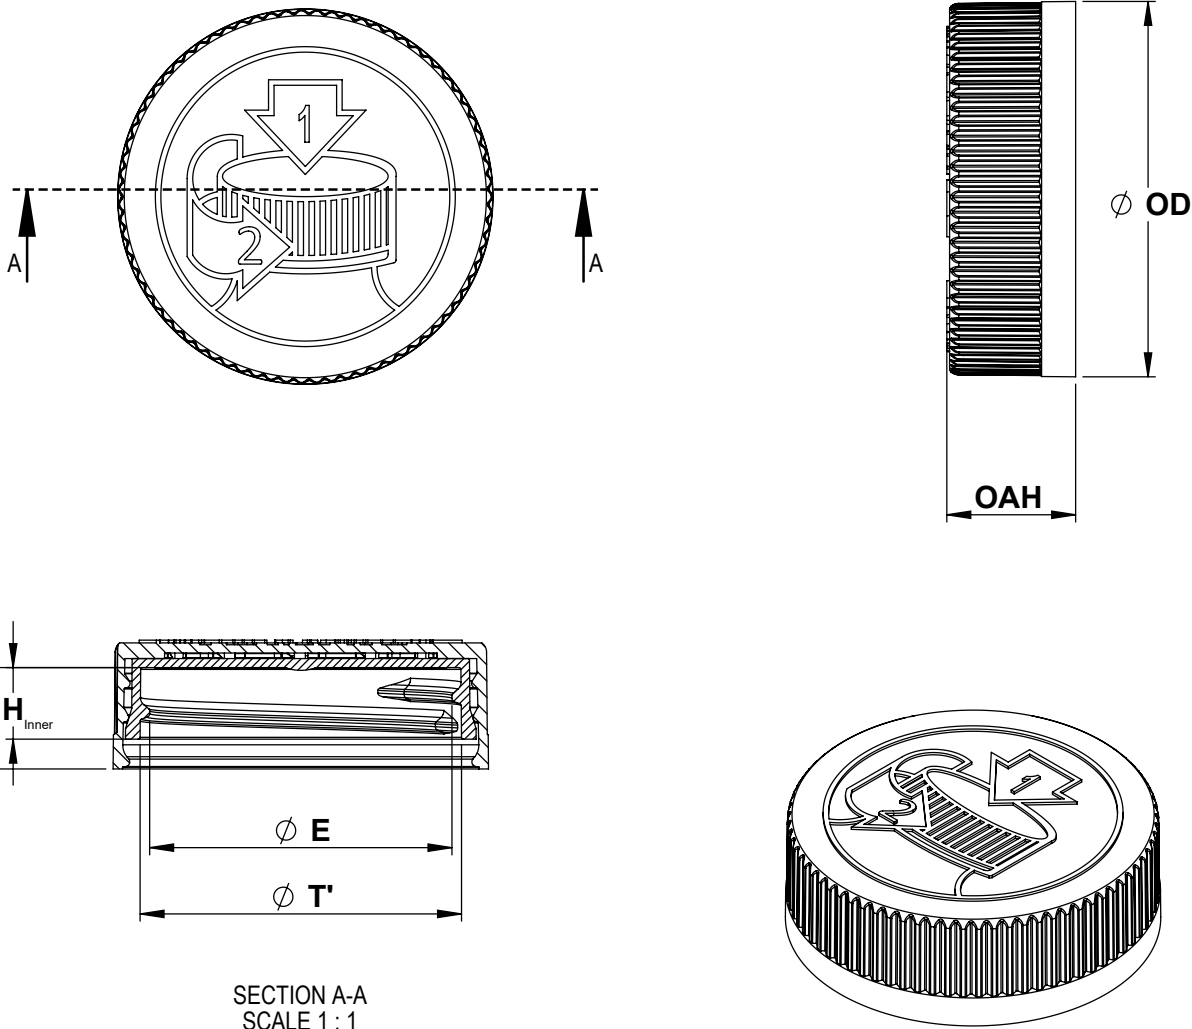

DISCLAIMER

This specification does not relieve the customer of their ultimate responsibility for the determination of the appropriate container. It is the customer's responsibility to select the appropriate packaging based upon all information at their disposal including the specific application, regulatory compliance, product compatibility and shipping requirements. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

DISTRIBUTED BY:



REF NO.:

DWG-Q1512

DESCRIPTION:

45-400 PP CHILD RESISTANT CAP FS 3-19 HEAT IN-
DUCTION LINER FOR PET @1100 PICTORAL

Material	Polypropylene (PP)	Closure Type	Child Resistant (CRC)
Size	45-400	Assembly Type	Pictorial CRC
Part Weight	9.60 g ± 1.5 g	Torque	17-27 in-lbs

DIMENSIONS

OD	2.044" (51.92 mm)	OAH	0.698" (17.73 mm)
E	1.658" (42.11 mm)	T'	1.752" (44.50 mm)
H (Inner)	0.385" (9.78 mm)	H (Seated)	0.548" (13.92 mm)

THREAD / FINISH


Threads per inch	6	Pitch	0.167" (4.24 mm)
Thread Engagement	~380° full depth	Thread Type	Continuous Thread

RECOMMENDED NECK FINISH

E	1.631" (41.43 mm)	T	1.725" (43.82 mm)
S	0.046" (1.17 mm)	H	0.405" MIN
H1	0.570" MIN	B	1.820" MAX

TOLERANCE

Standard Tolerance	±0.010-0.020 in (varies by dimension)
--------------------	---------------------------------------

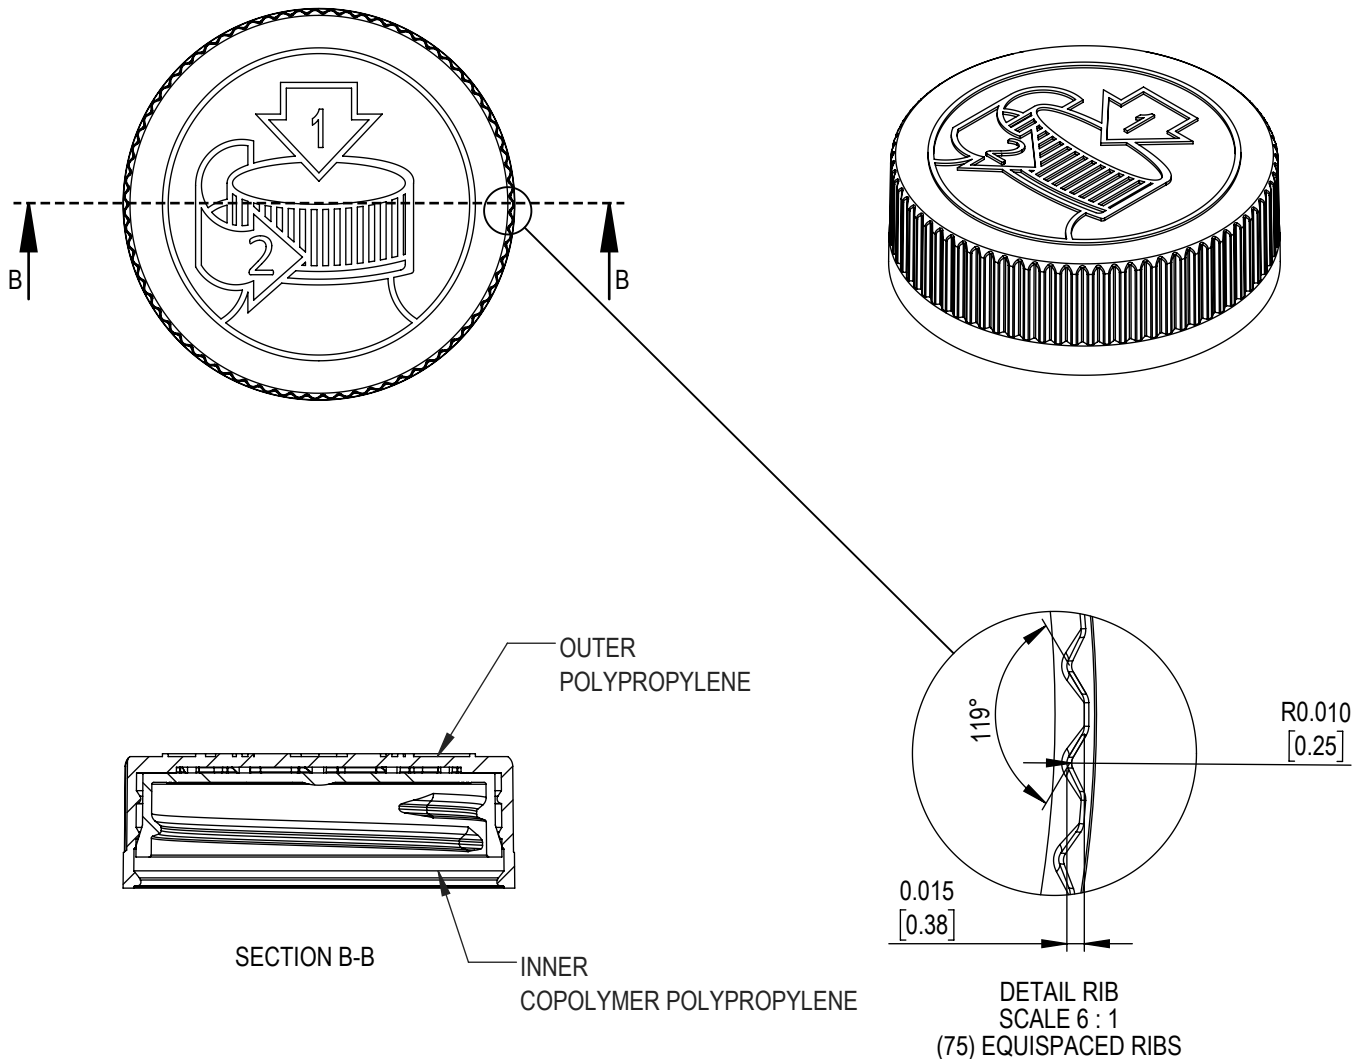

DISCLAIMER

This specification does not relieve the customer of their ultimate responsibility for the determination of the appropriate container. It is the customer's responsibility to select the appropriate packaging based upon all information at their disposal including the specific application, regulatory compliance, product compatibility and shipping requirements. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

DISTRIBUTED BY:



REF NO.:

DWG-Q1512

DESCRIPTION:

45-400 PP CHILD RESISTANT CAP FS 3-19 HEAT INDUCTION LINER FOR PET @1100 PICTORAL

Material	Polypropylene (PP)	Closure Type	Child Resistant (CRC)
Size	45-400	Assembly Type	Pictorial CRC
Part Weight	9.60 g ± 1.5 g	Torque	17-27 in-lbs

DIMENSIONS

OD	2.044" (51.92 mm)	OAH	0.698" (17.73 mm)
E	1.658" (42.11 mm)	T'	1.752" (44.50 mm)
H (Inner)	0.385" (9.78 mm)	H (Seated)	0.548" (13.92 mm)

THREAD / FINISH


Threads per inch	6	Pitch	0.167" (4.24 mm)
Thread Engagement	~380° full depth	Thread Type	Continuous Thread

RECOMMENDED NECK FINISH

E	1.631" (41.43 mm)	T	1.725" (43.82 mm)
S	0.046" (1.17 mm)	H	0.405" MIN
H1	0.570" MIN	B	1.820" MAX

TOLERANCE

Standard Tolerance	±0.010-0.020 in (varies by dimension)
--------------------	---------------------------------------

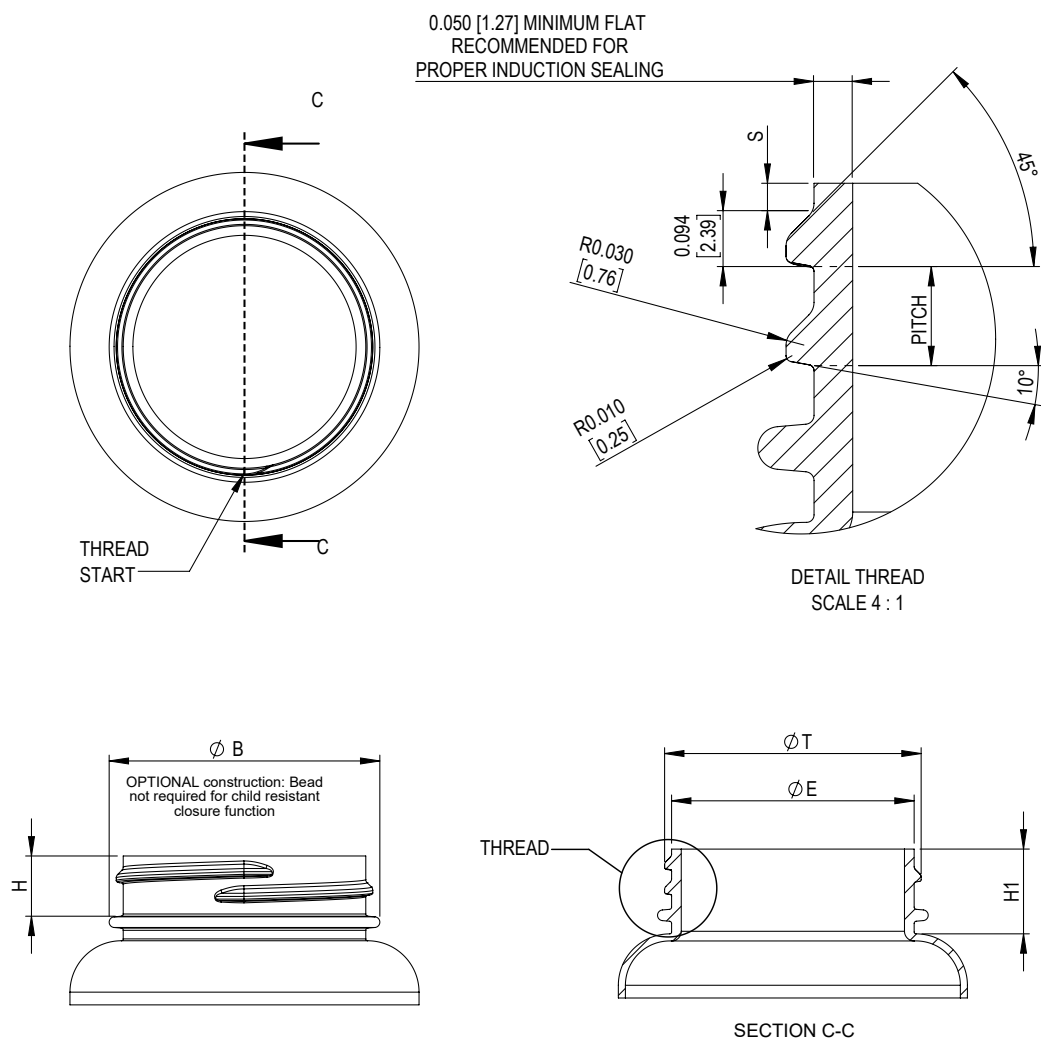

DISCLAIMER

This specification does not relieve the customer of their ultimate responsibility for the determination of the appropriate container. It is the customer's responsibility to select the appropriate packaging based upon all information at their disposal including the specific application, regulatory compliance, product compatibility and shipping requirements. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

DISTRIBUTED BY:



REF NO.:

DWG-Q1512

DESCRIPTION:

45-400 PP CHILD RESISTANT CAP FS 3-19 HEAT INDUCTION LINER FOR PET @1100 PICTORAL