



TECHNICAL INFORMATION



V3 Moderate
Variation



Stock and
Ready Ship



Frost Resistant



PEI Rating (2-4)




DCOF: > 0.42
(Matte only)




Water Absorption:
≤0.5%

COLORS (Matte)

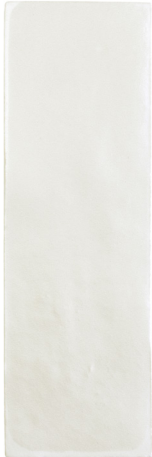

Popcorn
WOW RBPC

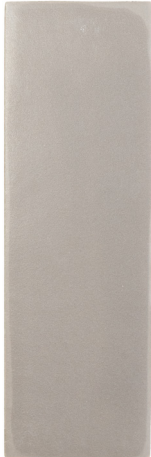

Grey
WOW RBGR



Taupe
WOW RBTA



Topo
WOW RBTO



Sage
WOW RBSG



Moss
WOW RBMO



Mustard
WOW RBMU



Terracotta
WOW RBTE



Nero
WOW RBNR

COLORS (Gloss)



Popcorn
WOW RBPC



Grey
WOW RBGR




Taupe
WOW RBTA



Topo
WOW RBTO



Sage
WOW RBSG

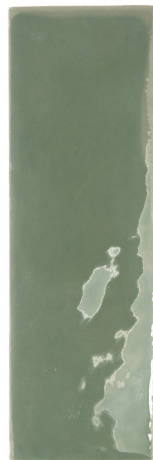

Moss
WOW RBMO



Mustard
WOW RBMU



Terracotta
WOW RBTE



Nero
WOW RBNR



Tiles, Mosaic and Trim*

SIZE	ACTUAL	THICKNESS	FINISH
2" x 6" Glossy	1.89" x 5.82"	8.5	Gloss & Matte
0.3" x 6" Edge Glossy	0.30" x 5.82"	8	Gloss & Matte

* Not all sizes are available in all colors and finishes.

Application**

		WALL	FLOOR
Interior	Residential	•	•
Interior	Commercial	•	
Interior	Heavy Commercial	•	
Exterior	Residential/Commercial	•	

** These recommendations are not defined by ANSI Standards

Performance Characteristics

Breaking Strength	35 N/mm ²
Chemical Resistance	GA-GHA
DCOF	N/A
Deep Scratch Resistance - Unglazed	N/A
Frost Resistance	Resistant
Mohs Hardness - EN101	N/A
Water Absorption	≤ 0.5%
Certifications	N/A
Country of Origin	N/A
Shade Variation Code	V3

