



NOTE

- The Pop-Up Power Unit must be plugged into a GFCI outlet
- If pre-wired wires from factory are cut, this will void the warranty and ETL listing.
- Firmly insert plug straight into receptacle, applying equal pressure to both blades at the same time. **Gently** rock plug, if needed.
- CAUTION: To reduce the risk of electric shock—install indoors and in dry locations only
- CAUTION: To reduce the risk of fire and electric shock—unplug and remove all plugged in equipment before closing device.


Tools Needed




Product Legend

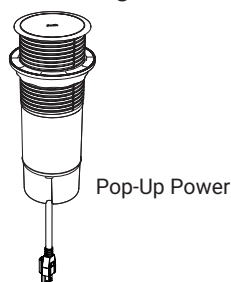


Drill & Install Steps

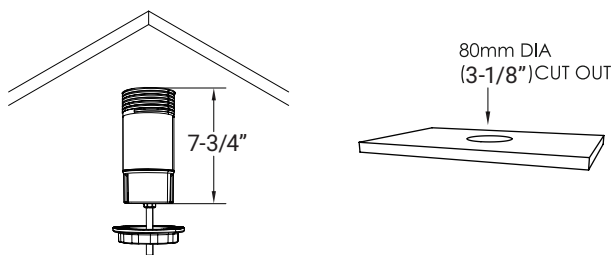


1. Before installing, make sure there is at least 8" depth under the countertop; mark the position and cut the hole 3-1/8".

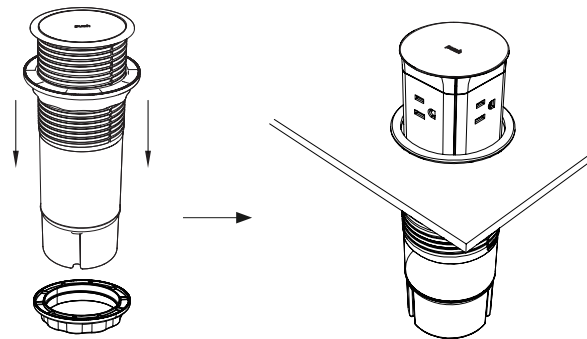

2. Remove the lock ring. Install the outlet into the hole.
NOTE: Make sure the cord is plugged into a GFCI outlet and is not tangled.

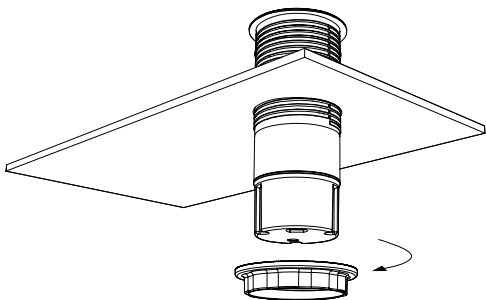

3. Tighten the lock ring.
NOTE: Do not over tighten ring.

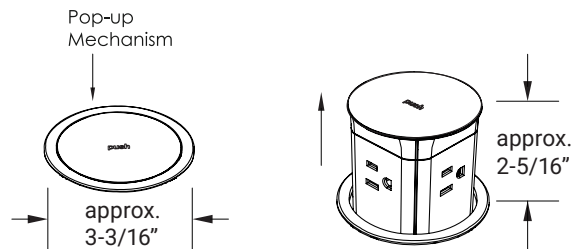

4. Press down the surface to pop it up or press down to hide (press until you hear a "click" sound).