




Location:
SYMMONS® Duro®

SLS3622PP
Single Handle Lavatory Faucet
Specification Submittal

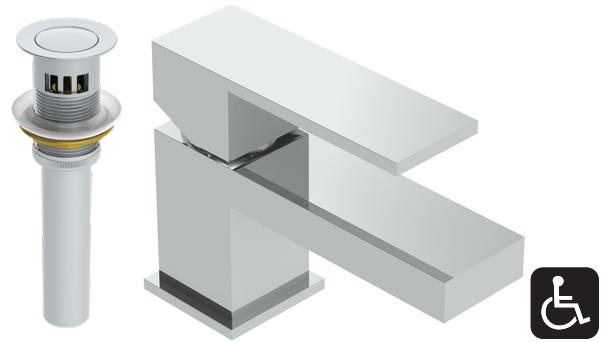

Model Numbers

- ☐ **SLS3622PP** Single Handle Lavatory Faucet with Push Pop Drain Assembly

Options/ Modifications

- ☐ **BBZ** **Brushed Bronze finish**
☐ **MB** **Matte Black finish**
☐ **STN** **Satin Nickel finish**

Note: Append appropriate suffix to model number.

Compliance

- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372
- WaterSense 1.0 gpm (3.8 L/min) only



Feature Highlights

- Single hole mount configuration
- Single lever cartridge with ceramic control components
- 25 inch braided hose water supply connections
- 4-1/2" height
- Standard 1.0 gpm (3.8 L/min) flow rate
- Faucet shall be metal construction, plated in standard polished chrome finish

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.




Architectural/ Engineering Specification

Symmons Duro Single Handle Lavatory Faucet _____ With Single hole mount configuration, Single lever cartridge with ceramic control components, 25 inch braided hose water supply connections, 4-1/2" height, Standard 1.0 gpm (3.8 L/min) flow rate, Faucet shall be metal construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, WaterSense 1.0 gpm (3.8 L/min) only complaint. Available options include: "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish".

SLS3622PP

Dimensions

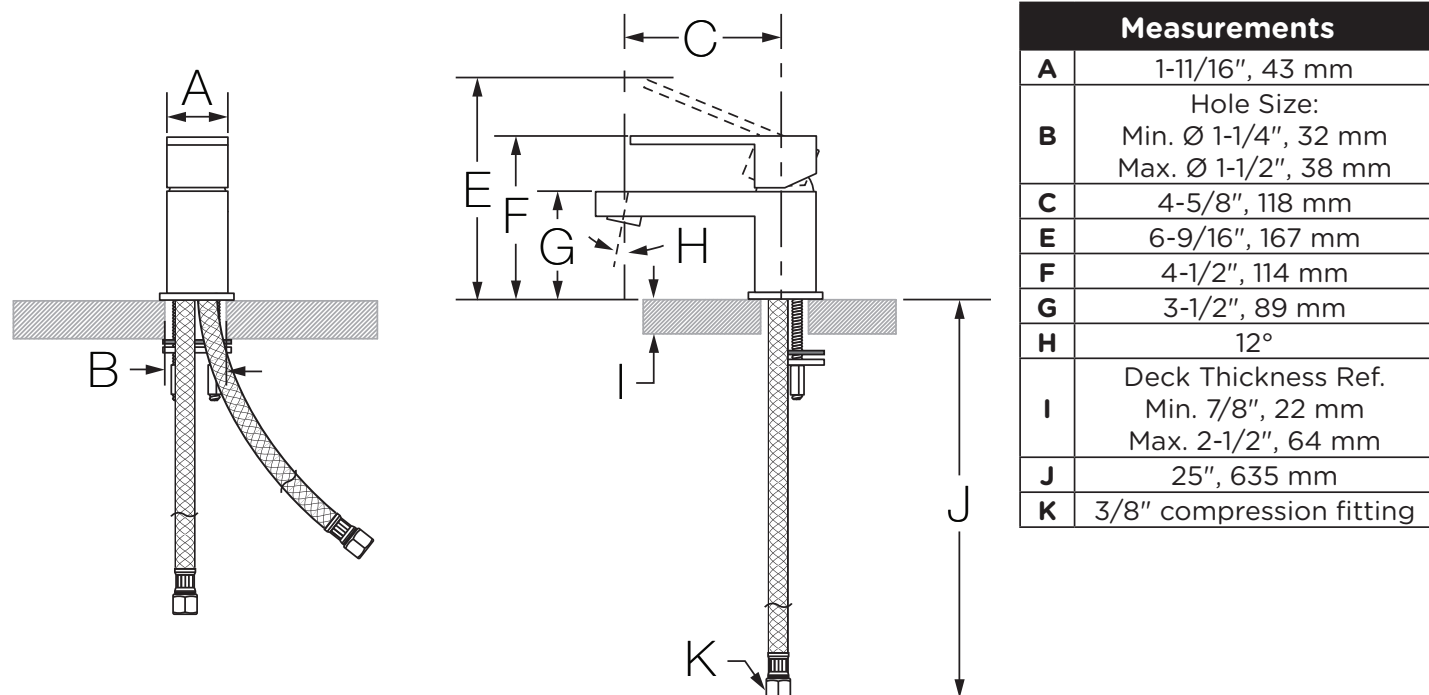

Note: Dimensions subject to change without notice.

