


James

BY SONANCE

POWERED SPL SOUNDBAR DATA SHEET

TECHNICAL SPECIFICATIONS

	SPL8QT-LR-PWR	
UOM	Each	
Tweeter	0.75" (19mm) Aluminum	
Woofer	8" (203.2mm) Aluminum	
Frequency Response	60Hz-24kHz +/-3dB	
Sensitivity (2.83V/1m)	96dB SPL	
Enclosure	Aircraft Grade Aluminum	
Width (W)	Built-to-Order 47" (1193.8mm) Minimum	Built-to-Order Width
Dims (Depth x H)	4" x 8.125" (101.6mm x 206.38mm)	
Shipping Weight	Dependent on width	
Channels	2 (stereo pair)	
Watts per Channel	125W (stereo)	
Inputs	Analog RCA, HDMI ARC/eARC, 2ch PCM	
AC Voltage	100-240Vac 50-60Hz	

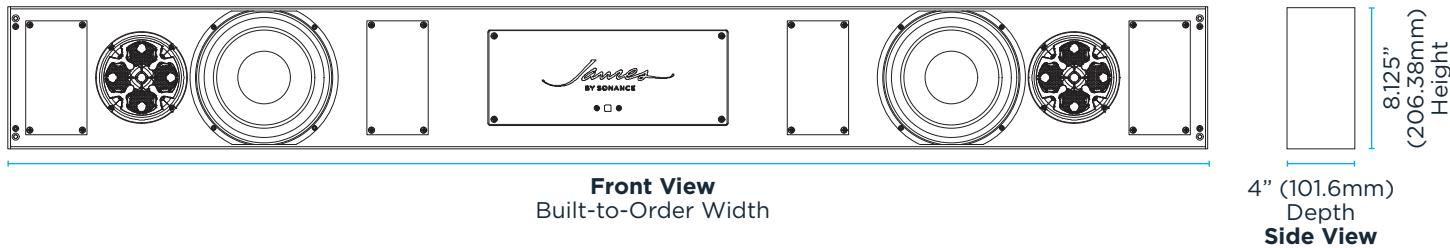

FEATURES

- Painted stainless steel perforated grille
- Left/Right configuration
- Built-in powered amplifier with eARC HDMI
- Through-hole mount, TV mount, or wall mount (mounting brackets sold separately)

SPL-QT models feature panels on the front baffle that provide access during product manufacturing for improved build consistency. Not field-serviceable.

LIMITED TWO (2) YEAR WARRANTY Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for the period stated above. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent. For more details please refer to the product manual.

©2026 Sonance. All rights reserved. Sonance is a registered trademark of Dana Innovations. Due to continuous product improvement, all features and specifications are subject to change without notice. For the latest Sonance product specification information visit our website at www.sonance.com.