




## CARLOW LINEAR LANTERN

CC1586

### General Product Information




Product Warranty



FCC Statement

### Suggested/Required Tools



### Safety Information

#### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

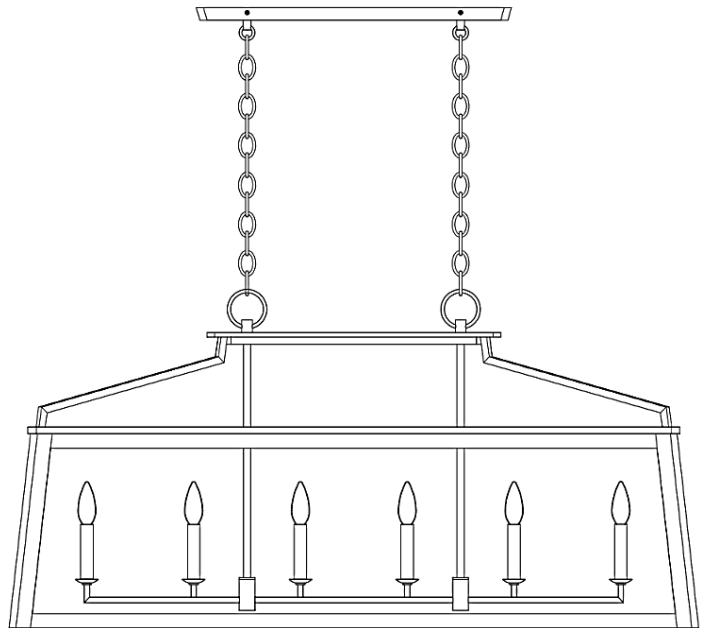

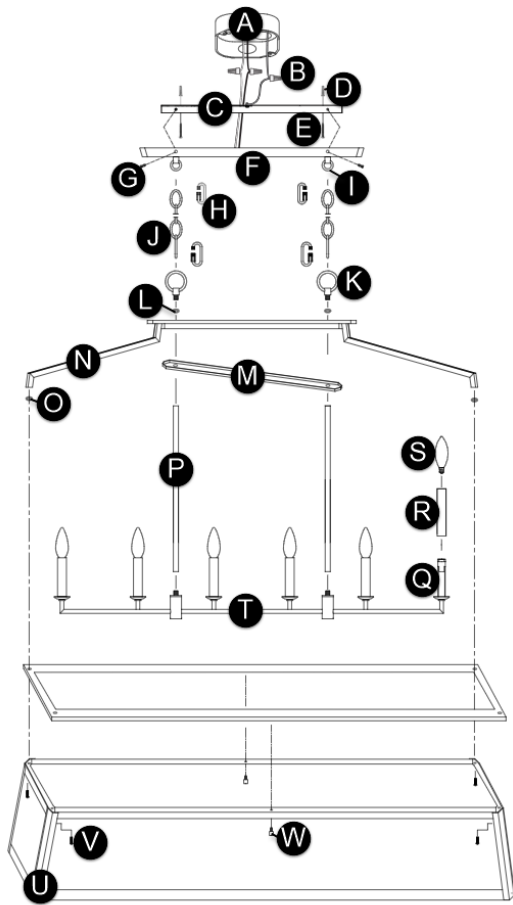

## FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Screws (Not Illustrated)
- D. Anchors
- E. Anchor Screws
- F. Canopy
- G. Fixture Screws
- H. Quick Links
- I. Canopy Loops
- J. Chain Assembly
- K. Fixture Loops
- L. Washers
- M. Fixture Plate
- N. Upper Frame
- O. Frame Washers
- P. Stems
- Q. Sockets
- R. Candle Tubes
- S. Bulbs (Not Included)
- T. Socket Assembly
- U. Lower Frame
- V. Frame Screws
- W. Cap Screw

## INSTRUCTIONS

### I. Preparing the Fixture

1. Temporarily install the mounting plate to the junction box and mark the anchor locations through the holes on the mounting plate.
2. Remove the mounting plate, drill appropriately sized holes at the marked locations, and install the anchors.
3. Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
4. Feed the fixture wires through the stems, then screw the stems onto the socket assembly.
5. Feed the fixture wires through the fixture plate, upper frame, washers, and fixture loops. Then secure them to the stems by screwing on the fixture loops.
6. Place the center frame on top of the lower frame, then lower the upper frame onto the center frame and secure them together using the frame washers and screws as shown. **This step will require the help of another person.**
7. Install the candle tubes by sliding them over the sockets.
8. Determine the desired height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
9. Install the large quick link to the bottom end of the chain, then secure the large quick link onto the fixture loop.
10. Install the small quick link onto the remaining end of the chain, then secure the small quick link onto the canopy loop.
11. Weave the cord through the chains, canopy loops, and canopy, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot (black) fixture wire to hot power line wire
  - b) Neutral (white) fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place with the fixture screws.
2. Screw the bulbs into the sockets. Refer to the label on the socket for max wattage information.