

STYLED IN ITALY. PROUDLY AMERICAN.

RIDGE



atlas concorde
USA



RIDGE

Traditional and rustic at first glance, this particular mix of stones features a raw look, which can quickly become young and informal. A touch of natural simplicity for giving comfort and personality to your spaces.



RIDGE

Ridge Anthracite 11^{3/4"}x23^{5/8"} - 30x60 cm


COLORLED BODY PORCELAIN STONEWARE



Ivory



Beige

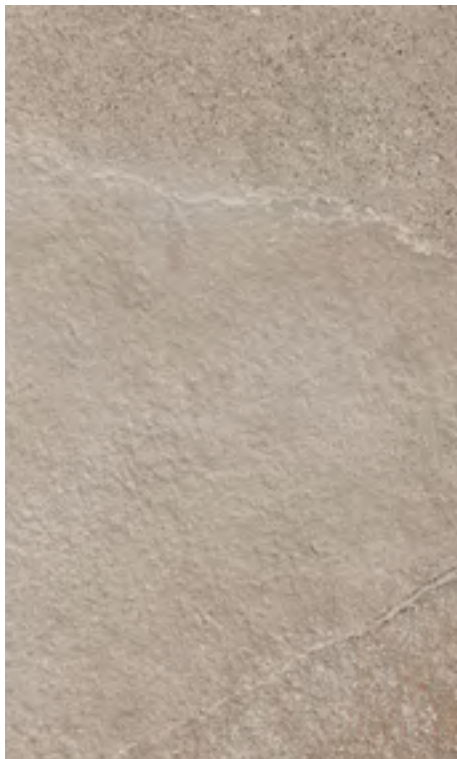

Greige



Anthracite



RIDGE

Ridge Ivory $11\frac{3}{4}'' \times 23\frac{5}{8}''$ - 30x60 cm
Ridge Beige Row Mosaic $11\frac{3}{4}'' \times 11\frac{3}{4}''$ - 30x30 cm
Ridge Ivory Bullnose $3'' \times 24''$ - 7.2x60 cm

RIDGE

COLORLED BODY PORCELAIN STONEWARE




Ivory



Beige



Greige

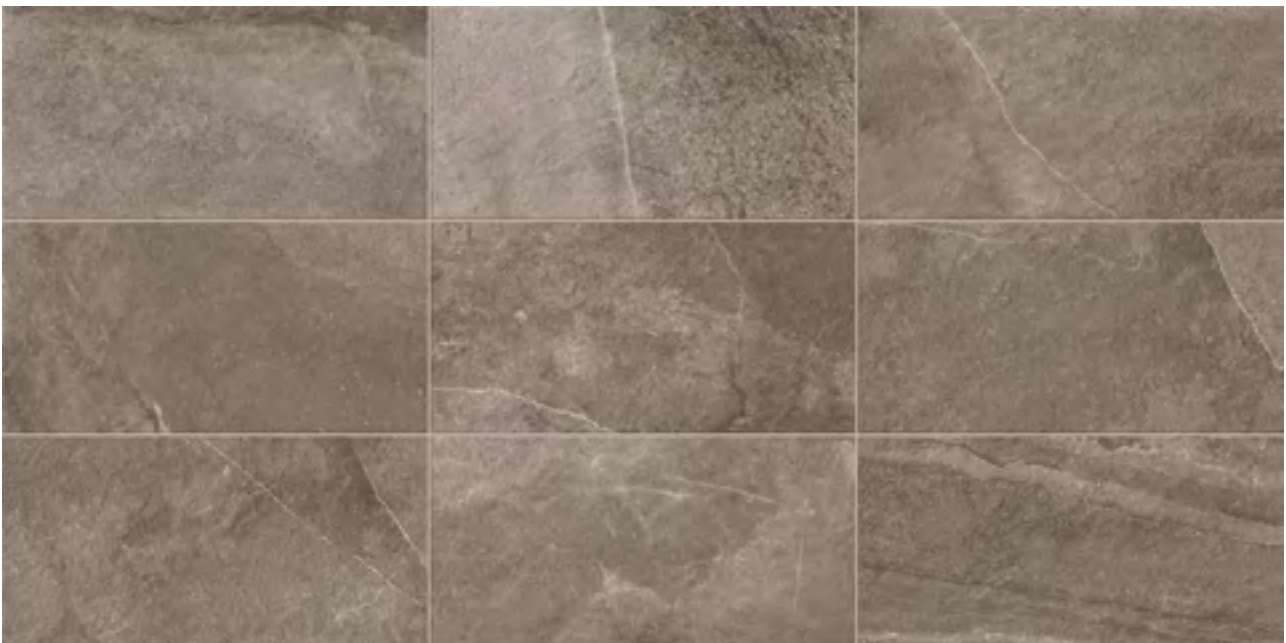

Anthracite

RIDGE

COLORLED BODY PORCELAIN STONEWARE

RIDGE

Ridge Beige 11^{3/4}"x23^{5/8}" - 30x60 cm
Ridge Beige Cove Base 6"x12" - 15x30 cm

REDEEM

Redeem Ash 7^{6/8}"x39^{3/8}" - 20x100 cm





MODERATE VARIATION

V3

Compliant with standards ANSI A137.1-2012



RIDGE

Ridge Greige 11^{3/4}"x23^{5/8}" - 30x60 cm
Ridge Greige Bullnose 3"x24" - 7.2x60 cm




RIDGE

SIZE - THICKNESS | 11^{3/4"} x 23^{5/8"} - 30x60 cm  9 mm | FINISH | MATTE



RIDGE Ivory
11^{3/4"} x 23^{5/8"} - 30x60 cm

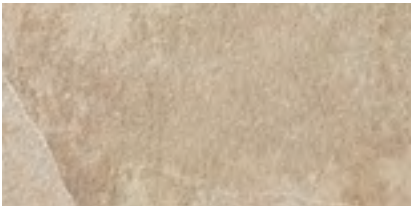

RIDGE Beige
11^{3/4"} x 23^{5/8"} - 30x60 cm




RIDGE Greige
11^{3/4"} x 23^{5/8"} - 30x60 cm




RIDGE Anthracite
11^{3/4"} x 23^{5/8"} - 30x60 cm


MOSAICS




RIDGE Ivory Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Mosaic 2"x2")




RIDGE Beige Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Mosaic 2"x2")




RIDGE Greige Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Mosaic 2"x2")



RIDGE Anthracite Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Mosaic 2"x2")




RIDGE Ivory Row Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Row Mosaic 2"x4")



RIDGE Beige Row Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Row Mosaic 2"x4")



RIDGE Greige Row Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Row Mosaic 2"x4")



RIDGE Anthracite Row Mosaic
11^{3/4"} x 11^{3/4"} - 30x30 cm
(Row Mosaic 2"x4")



MODERATE VARIATION

V3

Compliant with standards ANSI A137.1-2012



RIDGE

Ridge Beige Row Mosaic 11^{3/4}"x11^{3/4}" - 30x30 cm

COORDINATING TRIMS



RIDGE Ivory




RIDGE Beige




RIDGE Greige



RIDGE Anthracite



Bullnose
3"x 24" - 7.2x60 cm



Cove base
6"x12" - 15x30 cm

COLORED BODY PORCELAIN STONEWARE



Compliant with standards ANSI A137.1-2012

SIZE - THICKNESS

11 3/4" x 23 5/8" - 30x60 cm ± 9 mm

FINISH

MATTE



V3

MODERATE VARIATION

While the colors and/or texture present on a single piece of tile will be indicative of the colors and/or texture to be expected on the other tiles, the amount of colors and/or texture on each piece may vary significantly. It is recommended that the range be viewed before selection.

FIELD TILES - Available in all colors

Nominal size (in)	Thickness (mm)	Finish
11 3/4" x 23 5/8"	9 mm	Matte

MOSAICS AND COORDINATING TRIMS - Available in all colors

	Nominal size (in)	Thickness (mm)	Finish
Mosaic 2"x2"	11 3/4" x 11 3/4"	9 mm	Matte
Row Mosaic 2"x4"	11 3/4" x 11 3/4"	9 mm	Matte
Bullnose 3"x24"	2 7/8" x 23 5/8"	9 mm	Matte
Cove Base 6"x12"	5 7/8" x 11 3/4"	8.5 mm (*)	Matte

Please refer to caliber chart for work sizes.

Close joints are not recommended.

(*): Cove Base thickness is 7 mm on flat top part.

PERFORMANCE & FEATURES

				Porcelain Tile Specification				RIDGE
				Calibrated		Rectified		
				Minimum	Maximum	Minimum	Maximum	
REGULARITY CHARACTERISTICS		Nominal Size	ASTM C499	-3.00%	3.00%	-3.00%	2.00%	Compliant
		Caliber Range (Variation from average facial dimension of sample)		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant
		Thickness ⁽¹⁾		N/A	Range: 0.40 in (1.02 mm)	N/A	Range: 0.40 in (1.02 mm)	Compliant
	Wedging	ASTM C502	-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.25% or -0.03 in (-0.8 mm) (*)	0.25% or 0.03 in (0.8 mm) (*)	Compliant	
		Warpage Edge	ASTM C485	-0.75% or -0.09 in (-2.3 mm) (*)	0.75% or 0.09 in (2.3 mm) (*)	-0.40% or -0.05 in (-1.3 mm) ⁽²⁾ or -1.8 mm ⁽³⁾ (*)	0.40% or 0.05 in (1.3 mm) ⁽²⁾ or 1.8 mm ⁽³⁾ (*)	Compliant
		Warpage Diagonal		-0.50% or -0.08 in (-2.0 mm) (*)	0.50% or 0.08 in (2.0 mm) (*)	-0.40% or -0.07 in (-1.8 mm) (*)	0.40% or 0.07 in (1.8 mm) (*)	Compliant
				All Porcelain Tiles				
STRUCTURAL CHARACTERISTICS		Water Absorption	ASTM C373	≤ 0.5%				≤ 0.5%
BULK MECHANICAL CHARACTERISTICS		Breaking strenght	ASTM C648	Average ≥ 250 lbf. (1.11 kN) Individual ≥ 225 lbf. (1.00 kN)				≥ 350 lbf. avg
PHISICAL PROPERTIES		Bond Strength	ASTM C482	≥ 50 psi (0.34 Mpa)				≥ 100 psi
THERMAL AND IGROMETRIC CHARACTERISTICS		Resistance to Freeze/ Thaw Cycling	ASTM C1026	As Reported				Resistant
CHEMICAL CHARACTERISTICS		Chemical Resistance	ASTM C650	As Reported				Unaffected
		Stain Resistance	ASTM C1378	As Reported				Unaffected
SAFETY CHARACTERISTICS		Dynamic coefficient of friction	DCOF	Requires a minimum value of 0.42 for commercial areas that are likely to be wet				> 0,42 Wet

(*) Whichever is less

(1) May not apply to textured surfaces or tiles with uneven back patterns.

(2) Whichever is less, for tiles up to 24"x24" (610 mm x 610 mm).

(3) Applies to tiles larger than 24"x24" (610 mm x 610 mm).

Atlas Concorde reserves the right to modify any product without notice and will not be liable for any direct or indirect damage resulting from such modifications. Colors and optical features of the materials illustrated in this catalogue are to be regarded as mere indications. For information and details relating to codes, packaging and weight it is recommended to refer to the latest pricelist.

© Copyright Atlas Concorde USA, Inc. 2016

The reproduction of the work, fully or in part, is strictly forbidden.

Atlas Concorde Usa, Inc.
117 Seaboard Lane - Suite 170
Franklin, TN 37067 - USA

www.atlasconcordeusa.com