

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LF26A, LF263A Small Pressure Regulators

Sizes: LF26A: 1/8" – 1/2" (3 – 15mm)
LF263A: 1/4" – 1/2" (8 – 15mm)

Series LF26A, LF263A Small Pressure Regulators are general purpose pressure regulators for water service. The LF26A, LF263A features Lead Free* construction to comply with Lead Free* installation requirements. These regulators are ideal for use in beverage dispensers, ice cube machines and other similar applications. Lead Free* small pressure regulators shall comply with state codes and standards, where applicable, requiring reduced lead content.

Features

- Rugged forged Lead Free* Brass body
- Tee handle adjustment
- Oversized orifice

Models

LF26A 2-way regulator

LF263A 3-way regulator

Materials

Body: Lead Free* Brass

Spring Cage: Aluminum

Disc: Buna-N stainless steel

Diaphragm: Reinforced Buna-N

Pressure – Temperature

Temperature Range: 0°F – 140°F (-18°C – 60°C)

Maximum Working Pressure: 300psi (21 bar)

Reduced Pressure Range:

Suffix	Range		Std. Set at	
	psi	bars	psi	bars
A	1 – 25	0.1 – 1.7	10	0.7
B	3 – 50	0.2 – 3.4	15	1.0
C	10 – 125	0.7 – 8.6	25	1.7
D	50 – 175	3.4 – 12.1	50	3.4

Options

G Pressure gauge

SS All stainless steel construction

X Slotted adjusting screw

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.




LF26A
2-Way



LF263A
3-Way

Capacity

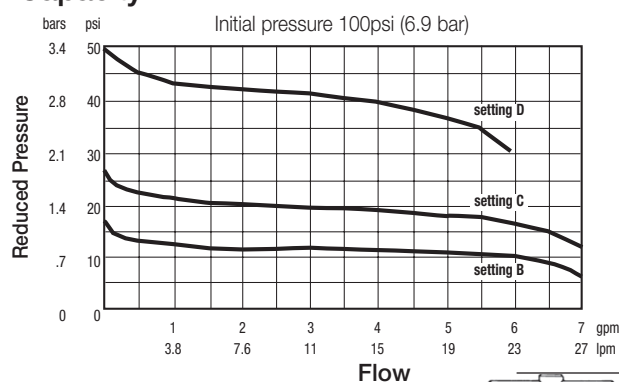


*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Approvals


 Certified to
NSF/ANSI 61-G

Dimensions – Weights

Model	Size (DN)		A		C		Weight	
	in.	mm	in.	mm	in.	mm	lbs	kgs
LF26A	1/8	3	2 1/8	54	4 3/8	111	1	.45
LF26A/LF263A	1/4	8	2 1/8	54	4 3/8	111	1	.45
LF26A/LF263A	3/8	10	2 1/8	54	4 3/8	111	1	.45
LF26A/LF263A	1/2	15	2 1/8	54	4 3/8	111	1	.45



WATTS®

A Watts Water Technologies Company

USA: Tel: (978) 689-6066 • Fax: (978) 975-8350 • Watts.com

Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

ES-LF26A_LF263A 1520

© 2015 Watts