



XOU24BCGO

24" PANEL READY BEVERAGE CENTER

LIFESTYLE REFRIGERATION



XOU24BCGO

- Shelves Extend Fully While Loaded
- Secure Door Lock
- Tri-Color LED Interior Lighting
- Shelves Adjust To 15 Different Positions

24" PANEL READY UNDERCOUNTER BEVERAGE CENTER


Your XO Beverage Center comes with clear glass – fully telescoping shelves. No more fumbling about or emptying shelves to find what you are looking for. Simply extend the shelf out to see what is in the back. And because beverages come in all shapes and sizes, you can easily and quickly adjust the height of the shelves to 15 different positions.

Store up to 145 (12oz) cans – Ready to serve at 34° to 50° F and still find just what you are looking for.

WORLD CLASS SERVICE | COMPREHENSIVE WARRANTIES

OUR LASTING COMMITMENT TO YOU

*Specify **R** for right hand hinge - or - **L** for left hand hinge

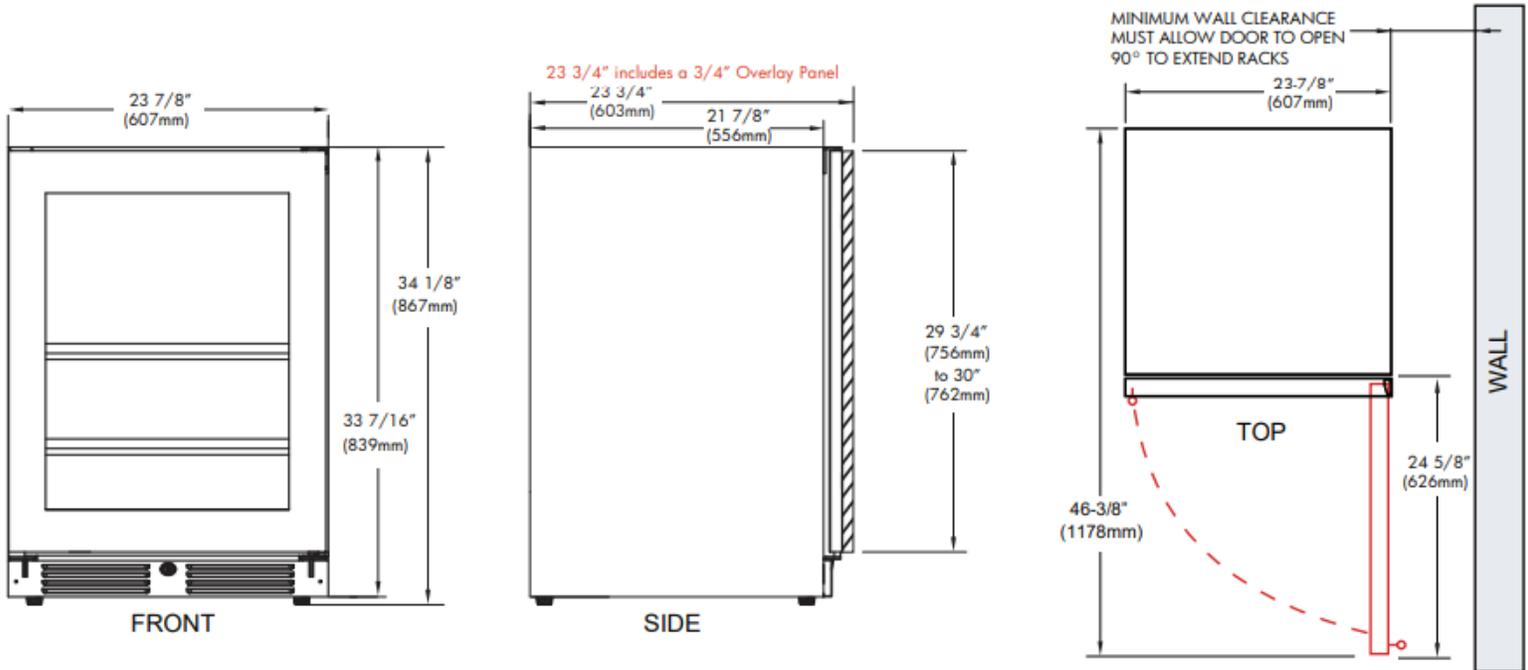

FEATURES

CAPACITY


Full extension clear glass shelves hold 145 (12oz) cans at 34° to 50° F

FEATURES

- Glass shelves extend fully while loaded to reveal contents
- Secure door lock
- Tri-color LED interior lighting
- Shelves quickly adjust to 15 different positions
- Intuitive digital temp control from 34° to 50° F
- Quiet Operation 39 dBA
- Holds up to 145 (12oz) cans
- Flush installation design
- Energy efficient Low-E Glass
- Removable Wine Bottle Cradle included
- XActive circulation removes odors and circulates air
- ENERGY STAR Certified Residential
- Designed for residential or commercial settings

SPECIFICATIONS


ELECTRICAL	120V 60HZ 4.35 AMP*
DIMENSIONS	H 34 1/8" W 23 7/8" D 23 3/4" (w 3/4" finish panel)
ROUGH IN	H 34 1/4" min W 24" D 24"
REFRIGERANT	R600A
WEIGHT	149 lbs



Scan the QR Code to see the installation video.




ROUGH IN DIMENSIONS

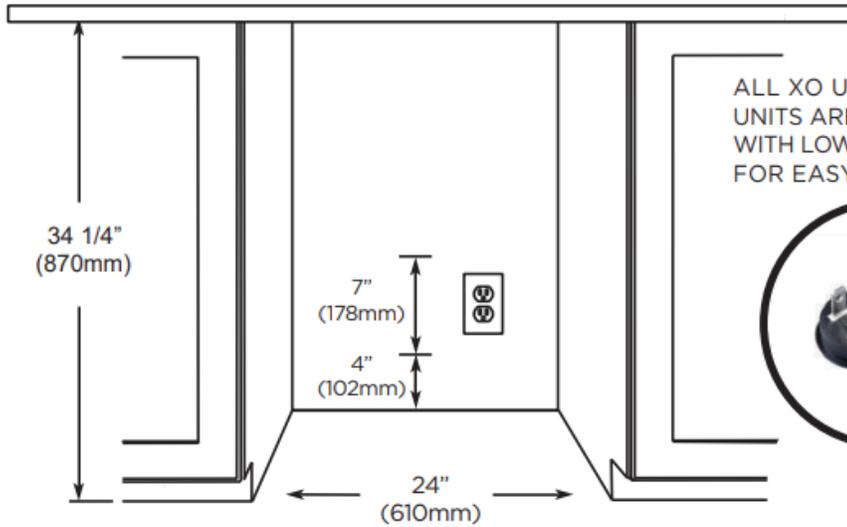



ALL XO UNDERCOUNTER UNITS ARRIVE PRE-WIRED WITH LOW PROFILE PLUGS FOR EASY INSTALLATION



NEED MORE SPACE - CUT INTO AN ADJOINING CABINET TO REACH AN OUTLET THERE




OVERLAY FRAME DIMENSIONS

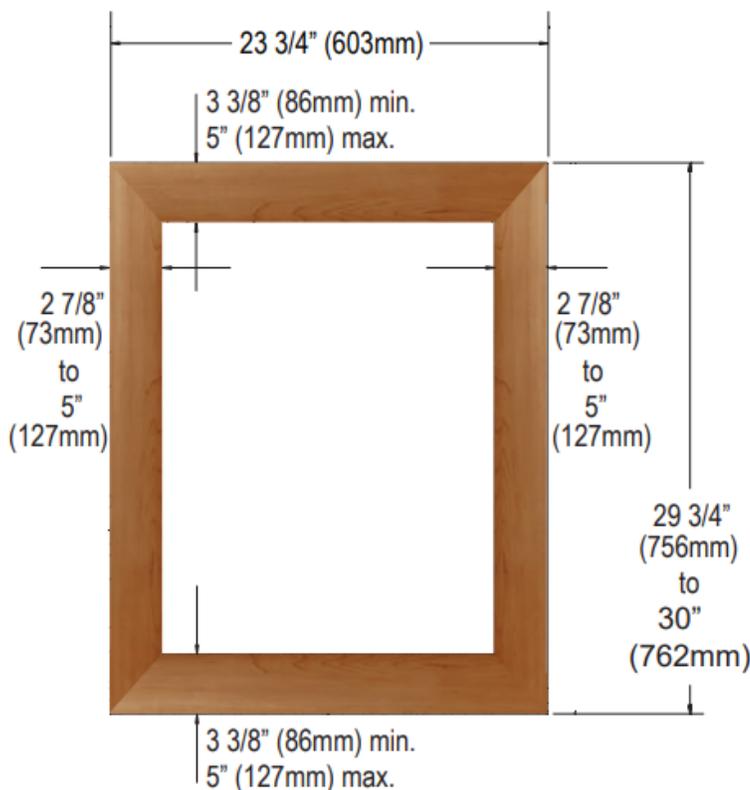


WHEN INSTALLING WITH THE HINGE SIDE NEXT TO A WALL - LEAVE ADEQUATE SPACE FOR CABINET HANDLES

DOOR MUST BE ABLE TO OPEN A MINIMUM OF 90°.

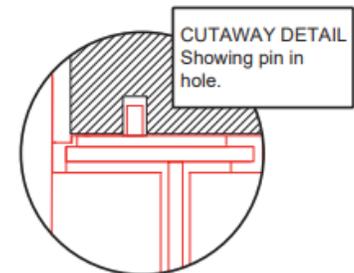

TO ACCOMMODATE THE HINGE PINS ON THE HINGE SIDE OF THE PANEL Drill a hole at least 5/16" in diameter and 1" deep into the top and bottom of the frame in the location shown.

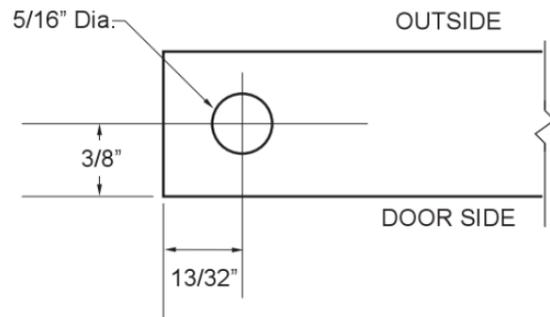

THE DOOR STOP IS SET AT 110° BUT CAN BE RESET TO 90° OR 140°.

IF THE DOOR CANNOT OPEN FULLY YOU CANNOT EXTEND THE RACKS.

XO the next level in luxury appliances

xoappliance.com | 800.966.8300