

model # LCR1 red label series LCR Speaker System

Overview.

Thank you for purchasing Elura speaker products. Elura is a high performance custom installed product engineered for movie and music enthusiasts. Each Elura product is manufactured to the highest quality standard using state of the art components and built for years of enjoyment.

Considerations.


Before connecting, mounting or installing any Elura product, please read all instructions. Careful considerations should be given to avoid obstacles such as electrical wires, plumbing or HVAC ductwork. If you are unsure or inexperienced with construction methods, please consult a professional.

Use the proper tools and pay close attention to detail while connecting the speaker wires. Make sure all equipment is powered off while connecting and disconnecting any equipment.

Improper use, not following precautions or instructions may cause damage to property, equipment, and possible injury or electrocution.

Features.

- Conveniently replaces front channel speakers (L, C, R)
- Can be mounted on the wall, or placed on a TV stand
- Low profile matches most flat screen TV depths
- Built with high quality, perfectly matched, speaker components
- Engineered to work with most audio and video receiver / amplifiers of 20 to 100W / CH




Contents.

- Elura LCR Speaker
- Wall Mounting Hardware
- Free Standing Hardware
- Mounting Template
- All screws, washers needed to attach the speaker to the hardware supplied

Connections. (Fig. 1)

Connect the LCR Speaker to an AV Receiver or Amplifier using high-quality 14 to 16 gauge stranded speaker wire. The stripped bare ends of the speaker wire may be connected directly to the speaker's push terminals. Twist the speaker wire to avoid strands from shorting from one connection to the other and pay careful attention to polarity (+ / -).


Note: Connections are located in a flush mount terminal cup in the rear of the speaker so that a wall mounted speaker can sit flush on the wall. See the Fig. 1 of the connector below:

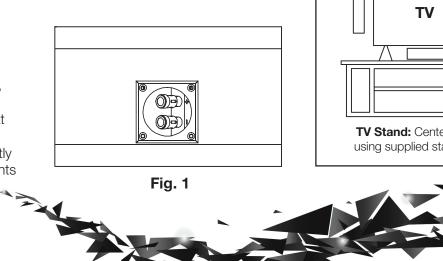

Speaker Placement. (Fig. 2)

The versatility of the LCR Speaker offers multiple placement options. The most popular option is on a TV stand below the speaker. When there is wall space, other options are mounting the speakers on the wall on each side above or below the TV. Take precautions to properly mount the speaker and avoid obstacles commonly found inside walls. The hardware for this type of installation is included.

Fig. 2 Placement

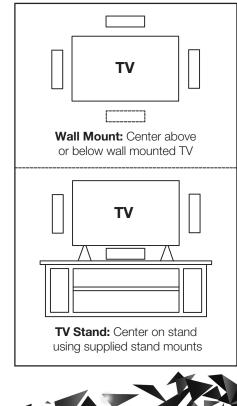

model # LCR1 red label series LCR Speaker System


Free Standing Installation. (Fig. 3)

The speaker stands included are required for the speaker to be free standing horizontally on a shelf or a TV

stand. Minor angle adjustments can be made to angle the sound up or down. In this scenario, it's important to note the

speaker's tonal quality can change if it's placed too far back on the shelf or TV

stand. For optimal performance, move the speaker flush to the front edge of the shelf or TV stand. See Fig. 3 for free standing placement and adjustment.

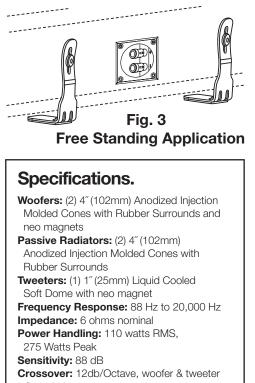

Crossover: 12db/Octave, woofer & tweeter @ 2.8 kHz

Connectors: Gold plated push terminals **Grille:** Cloth covered, removable magnetic grille **Enclosure:** Aluminum Extrusion, Black

Accessories Included: Up/Down Adjustable Shelf Brackets & Hanging Wall Mount Brackets for Vertical or Horizontal mounting **Speaker Dimensions:** 5^{rr} H x 23.75^{rr} W x 2^{rr} D (127mm x 603.7mm x 51.2mm) The speaker stands have foam pads on the bottom in order to avoid

scratches to the furniture and deaden vibration. The slot in the bracket offers slight angle and height adjustments. Use the supplied tool to


tighten the hex screw.

On-wall Mounting. (Fig. 4)

All hardware is included to mount the speakers to the wall. It is recommended to screw the brackets into a stud or use drywall anchors appropriately suited for the weight. Use the template to level the supplied

wall bracket locations and use the supplied hardware to hang the speaker to the brackets. The speaker should be mounted no more than 3" above or below the TV edge. See Fig. 4 showing hardware and wall

mounting options.

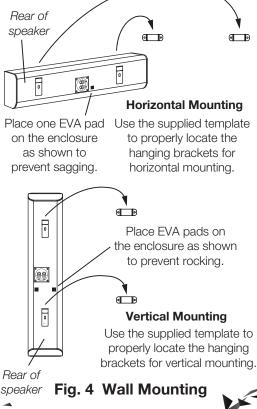

General Maintenance.

Clean the LCR Speaker with a damp cloth. The grille can be removed if needed by pulling in an outward direction. Use caution to avoid damaging the grille or speaker components under the grille.

Warranty.

elura

All Elura products come with a 2 year limited liability warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled.

A speaker that fails under conditions other than those covered will be repaired at the current price of parts and labor in effect at the time of repair. Such repairs are warranted for 5 years from the day of reshipment to the BUYER. If the unit is delivered by mail, customers agree to insure the unit or assume the risk of loss or damage in transit. Under no circumstances will a unit be accepted without a return authorization number. The warranty is in lieu of all other warranties expressed or implied, including without limitations, any other implied warranty or fitness or merchantability for any particular purpose, all of which are expressly disclaimed. Proof of sale may be required in order to claim warranty.

