

Location:



SK-6600 Single Handle Kitchen Faucet Specification Submittal

Feature Highlights

- 8" mount
- Quarter turn ceramic cartridge
- Stainless steel braided hoses with 3/8" compression connections
- Pull-out spray spout
- 90 degree swivel spout
- 1.5 gpm (5.7 L/min) standard aerator
- Components shall be metal construction, plated in standard polished chrome finish

Options/Modifications

- ☐ **-LP** *Loop handle*
- ☐ **-W** *6" lever handle (chrome only)*
- ☐ **-STN** *Satin Nickel finish*
- ☐ **-STS** *Stainless Steel finish*

Note: Append appropriate -suffix to model number.

Model Numbers

- ☐ **SK-6600-1.5**
Single Handle Kitchen Faucet

Compliance


ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/ Engineering Specification

Symmons Single Handle Kitchen Faucet Unity _____ With 8" mount, quarter turn ceramic cartridge, stainless steel braided hoses with 3/8" compression connections, pull-out spray spout, 90 degree swivel spout, 1.5 gpm (5.7 L/min) standard aerator, components shall be metal construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372. complaint. Available options include: "-LP - Loop handle", "-W - 6" lever handle (chrome only)", "-STN - Satin Nickel finish", "-STS - Stainless Steel finish".

Dimensions

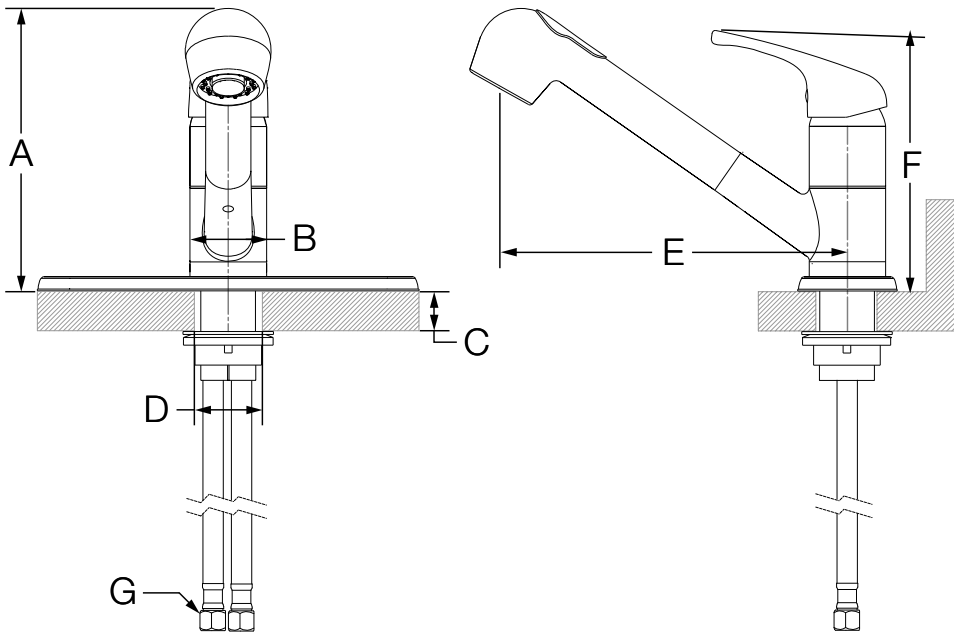

Measurements	
A	6-3/4", 171 mm
B	2", 51 mm
C	Deck Thickness Ref. Max. 1-1/8", 29 mm
D	Hole Size Min. Ø 1-1/2", 38 mm Max. Ø 1-3/4", 44 mm
E	8-1/2", 216 mm
F	6-1/2", 165 mm
G	3/8" compression connections

Note: Dimensions subject to change without notice.

Emplacement:



Unity®



SK-6600

Robinet de cuisine monopièce à une poignée
Specification Submittal

Principales Caractéristiques

- Configuration de fixation à trou unique avec plaque de recouvrement de 8 po
- Cartouche en céramique avec arrêt de la température limite
- Tuyaux tressés en acier inoxydable avec 3/8 po raccords à compression
- Rétractable à l'horizontale avec douchette
- Bec pivotant de 90 degrés
- Aérateur de 1,5 gpm (5,7 L/min)
- Composants faits de laiton et de matériaux non métalliques au fini chrome poli standard

Numéros de modèle

- ☐ **SK-6600-1.5**
Robinet de cuisine monopièce à une poignée

Options/Modifications

- ☐ **-LP** Poignée en boucle
- ☐ **-W** 6 po poignée de levier (finition chromée seulement)
- ☐ **-STN** Fini nickel satiné
- ☐ **-STS** Fini acier inoxydable

Remarque: Affichez le -suffixe qui correspond au numéro du modèle.

Garantie

Garantie limitée - à l'acheteur original dans les installations du consommateur/résidentiel.
10 Ans - pour les installations commerciales/industriel. Se reporter au www.symmons.com/warranty pour l'information complète concernant la garantie.




Normes

ASME A112.18.1/CSA B125.1
NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372



Dimensions

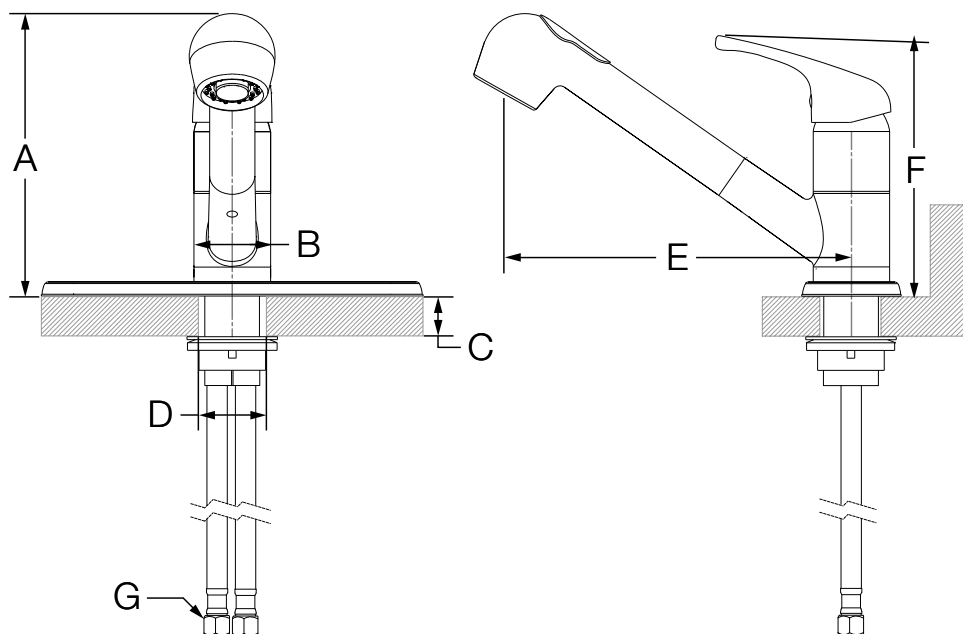

Mesures

A	6-3/4 po, 171 mm
B	2 po, 51 mm
C	Épaisseur du comptoir Max. 1-1/8 po, 29 mm
D	Taille du trou Min. Ø 1-1/2 po, 38 mm Max. Ø 1-3/4 po, 45 mm
E	8-1/2 po, 216 mm
F	6-1/2 po, 165 mm
G	Raccord à compression 3/8 po

Remarque: Les dimensions peuvent changer sans préavis.