



SPECIFICATION SHEET

16-530



G-TEK® POLYKOR™ BLENDED GLOVE WITH POLYURETHANE COATED GRIP

- Seamless construction offers increased comfort and breathability
- PolyKor™ shell is lightweight and provides excellent dexterity, tactile sensitivity and cut resistance
- Polyurethane coated palm and fingertips for great abrasion resistance, excellent puncture resistance and outstanding wet/dry grip
- Knit wrist helps prevent dirt and debris from entering the glove
- Cotton color binding denotes sizing
- Washable, resistant to chemicals, water, and ultraviolet light
- This style is also available tri-folded and shrink-wrapped for carefree dispensing through vending machines (16-530V)

APPLICATIONS

- Electronics
- Glass cutting
- Sheet metal handling
- General duty
- Parts assembly
- Sharp small parts handling

CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C)

TECHNICAL DATA

MATERIAL	PolyKor™ Fiber / Polyurethane					
CONSTRUCTION	Seamless Knit					
COLOR	■ Salt & Pepper					
CUFF STYLE	Elastic knit					
SIZES	XS - XXL					
PACKAGING	1 pair per bag, 12 pair per dozen, 6 dozen per case					
CASE	14.2" x 11.8" x 12.6" / 36cm x 30cm x 32cm					
CASE WEIGHT (lbs / kg)	XS	S	M	L	XL	XXL
	7.8 / 3.5	7.9 / 3.6	8.4 / 3.8	9.2 / 4.2	10 / 4.5	11.2 / 5
COO	China					



DIMENSIONS (in/cm)


	XS	S	M	L	XL	XXL
A	8.4 / 21.5	8.9 / 22.5	9.3 / 23.5	9.6 / 24.5	10 / 25.5	10.4 / 26.5
B	3.5 / 9	3.7 / 9.5	3.8 / 9.8	3.9 / 10	4.1 / 10.5	4.3 / 11
H	■ Purple	■ Red	■ Yellow	■ Brown	■ Black	■ Blue

PERFORMANCE PROPERTIES

EN388: 4X43C	ASTM F2992-15 ANSI Cut Level A3 (Adopted by ANSI/ISEA 02/16)					
ABRASION	0	1	2	3	4	5
CUT	X	1	2	3	4	5
TEAR	0	1	2	3	4	5
PUNCTURE	0	1	2	3	4	5
CUT (TDM-100)	A	B	C	D	E	F

BARCODES

ITEM	BAG	DOZEN	CASE
■ 16-530/XS	616314130885	01616314130884	02616314130883
■ 16-530/S	616314130861	01616314130860	02616314130869
■ 16-530/M	616314130854	01616314130853	02616314130852
■ 16-530/L	616314130847	01616314130846	02616314130845
■ 16-530/XL	616314130878	01616314130877	02616314130876
■ 16-530/XXL	616314130892	01616314130891	02616314130890

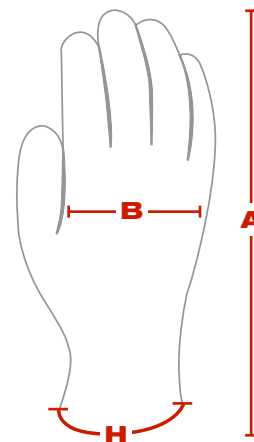

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.