












NANCE 2 LIGHT SEMI-FLUSH CONVERTIBLE PENDANT

7728002


General Product Information

| | | | |
|--|--|---|--|
|  <p>ETL LISTED Intertek</p> |  <p>SAVE THESE INSTRUCTIONS!</p> |  <p>STANDARD INSTALLATION</p> |  <p>INDOOR</p> |
|  <p>DAMP LOCATION SAFE</p> |  <p>NEC COMPLIANT JUNCTION BOX</p> |  <p>BULB(S) (NOT INCLUDED)</p> |  <p>TITLE 24 COMPLIANT</p> |
|  <p>LED</p> |  <p>PLEASE SEE visualcomfort.com FOR PRODUCT SPECS</p> |  <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p> |  <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p> |


WARRANTY


FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.

 Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



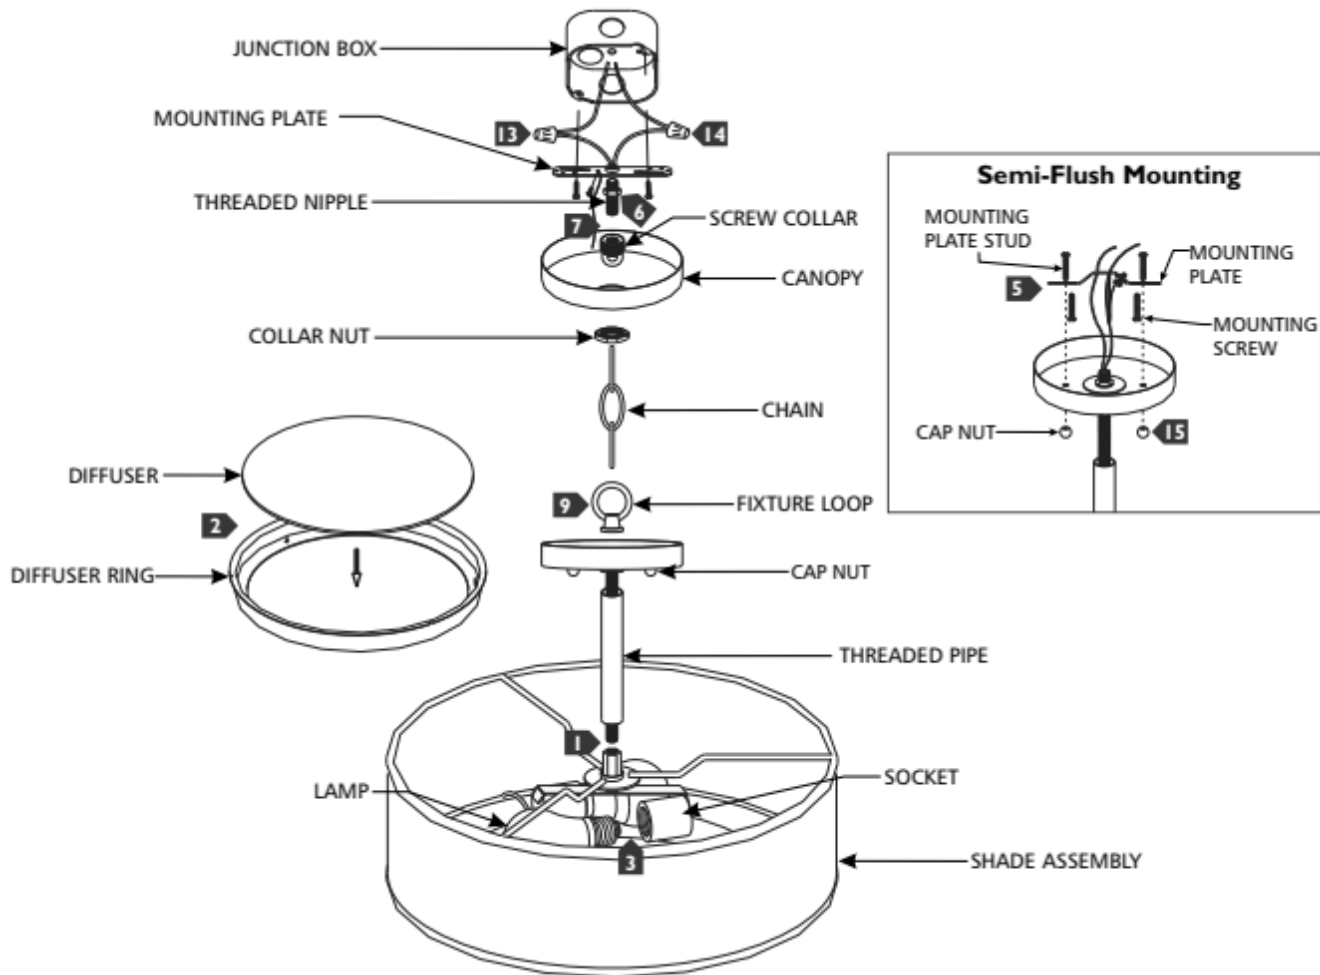

INSTRUCTIONS

I. Preparing the Fixture

1. Feed the fixture wires through the threaded pipe and screw it onto the shade assembly.
2. Place the diffuser into the diffuser ring, then install the diffuser assembly into the shade by carefully sliding it into place.
3. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
4. **FOR SEMI-FLUSH MOUNT ONLY:** Unscrew and remove the fixture loop from the fixture, then remove the cap nut screws and washers by unscrewing the cap nuts.
5. **FOR SEMI-FLUSH MOUNT ONLY:** Install the mounting plate with the two mounting studs to the junction box. **SKIP TO II. WIRING THE FIXTURE.**
6. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
7. Temporarily unscrew and remove the collar nut from the screw collar, then screw the screw collar tightly onto the threaded nipple.
8. Secure the mounting plate to the junction box.
9. Screw the fixture loop onto the fixture. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the bottom.
10. Install the canopy and collar nut onto the chain (in that order), then install the open link onto the fixture loop and secure it in place by closing the link.
11. Weave the cord through the chain and canopy, then trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. **FOR SEMI-FLUSH MOUNT ONLY:** Align, then place the fixture onto the mounting plate studs and secure with two cap nuts.
5. Neatly place all wires into the junction box, place the canopy onto the ceiling, and secure in place by screwing the collar nut tightly onto the screw collar.