
Vara<sup>™</sup> takes its inspiration from the natural beauty of marble. This stunning line evokes the luxurious look of natural stone but with the easy care of porcelain tile. The subtle veining and crisp coloring creates a stylish environment.

VARA<sup>TM</sup> Glazed Porcelain



POOL

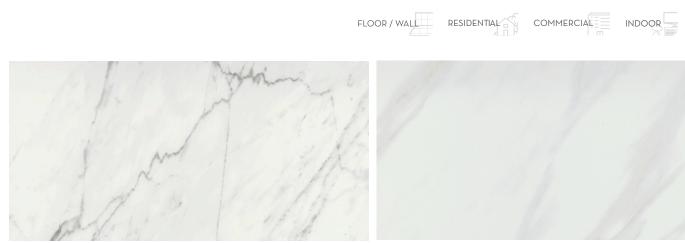

Groven\*\*

Ribia\*\*




Varzo\*\*



Results*	II (Polished) III (Matte)	>350 lbf F	Resistant	<0.50%		<0.42 (Polisł >0.42 (Matte		V2
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	e Water Al C373	osorption	DCOF AN A137.1	ISI Scratch Hard MOHS	Iness Shade Variation Rating
Grout Joint ecommendation	1/8"	1/8"		1/8" Check		Website	Check Website	Check Website
Edge	Rectified	Rectifie	d Re	ctified	Cut		Cut	Cut/Rounded
Finish	Matte & Polished	Matte & Polishe		atte & lished	Matte		Matte	Matte & Polished
Faces	6	12		24	N/A		N/A	N/A
Thickness	10mm	9mm	8.	.8mm	8.8mm		8.8mm	Check Website
	24"×47" 23.62"×47.24"	24"x24 23.62"x23.6		2"x24" 1"x23.62"		' Mesh 11.57"	10"x13" Mesh 9.84"x12.52"	3 <sup>"</sup> x12" Floor SBN
Sizes					8	8		

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 · For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



┛ ──→ Recommended 33% Offset\*

Sustainability Attribution

- Red List Free
   Health Deaduct Dealerst: (UDD)
- meanin Product Declaration (HPD) provided upon required . Droduct Deckaging is 100% recyclobile
- Recycled Content >40% Pre-Cons
- Recycled Content >40% Pre-Consumer, >10% Dest Consumer

\*For more information visit www.emser.com. Always consult a professional for proper usage and installation. \*\*Groven not available in 12°x24° polished. Ribia not available in 12°x24° matte and polisned nor 24°x24° polished. Varzo not available in 12°x24° matte.