


PREPARATION

1. Record your model number for future reference.
2. **DANGER: Risk of electric shock.** To avoid electric shock, the power must be turned off at the circuit breaker or fuse box before beginning the installation procedure.
3. **DANGER: Risk of electric shock.** To avoid electric shock, the outlet box must be properly grounded.
4. **Important Information.** Inspect the product for any damage. This product is for indoor use only. Observe all local codes.
Please see next page for a larger installation image

TOOLS AND MATERIALS NEEDED

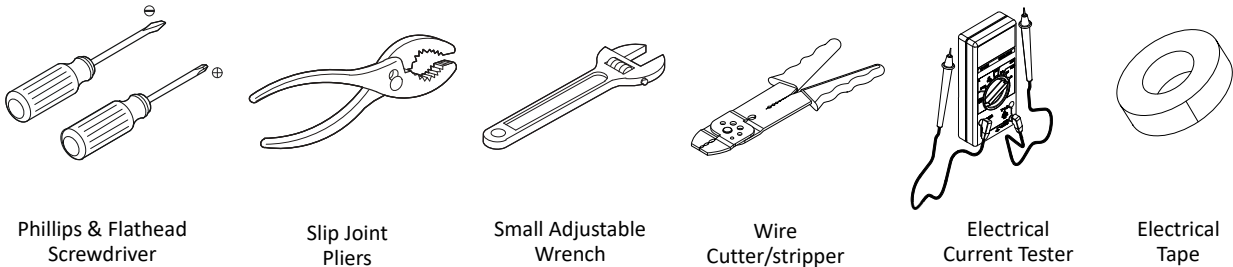

FIXTURE INSTALLATION

1. Remove the fixture and parts bag(s) from the carton. Put them onto a clean and soft cloth to protect finish. Confirm all parts are included.
2. Determine what height you want the fixture to rest at by mixing and matching the downrods (K, L, M and N).
3. Thread wire (O), safety cord (R) and ground wire through desired downrods (K, L, M, & N) and loop (J). Then tighten the desired rods together to attach to fixture.
4. Loosen knurled nut (H) and remove mounting bar (B) from canopy (F).
5. Attach mounting bar (B) onto outlet box with screws (D). Ensure ground screw (C) is attached to mounting bar (B).
6. Connect loops (J) and (G) with lock (I). Thread wire (O), safety cord (R) and ground wire through knurled nut (H), loop (G), and canopy (F). Then lift fixture, thread wire (O), safety cord (R) and ground wire through nipple (E). Lace safety cord (R) around mounting bar (B), then secure safety cord (R) by tightening set screws (S) with Allen wrench.
7. Trim excess cord to minimum 13" beyond canopy. Strip wire 5/8" at the end, and twist.
8. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture green or bare ground wire to the green or bare copper wire in outlet box with wire nut (A) or fasten onto ground screw (C) on mounting bar.
9. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture neutral wire (with ridges and no text)/white wire to the white wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A). See diagram 1.
10. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten the fixture live wire (with text and without ridges)/black wire to the black wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A). See diagram 1.
11. Tuck wires carefully inside outlet box. Lift fixture then attach canopy (F) and loop (G) onto mounting bar (B) with knurled nut (H).
12. **NOTICE:** Do not exceed recommended wattage. Rated **Max 60 W, Type T/B10.** (Bulb(s) not included).
13. Install bulb onto socket.
14. Install glass shade (P) onto socket (Q) by turning it until the connection is tight.
15. Repeat steps 12-14 for all glass shades.
16. Restore power to circuit at breaker or fuse box.


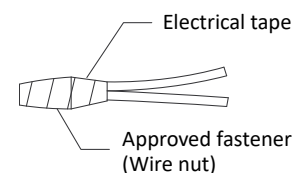


Diagram 1

CLEANING: Please clean fixture with a soft and dry cloth ONLY. Clean glass with a mild soap.

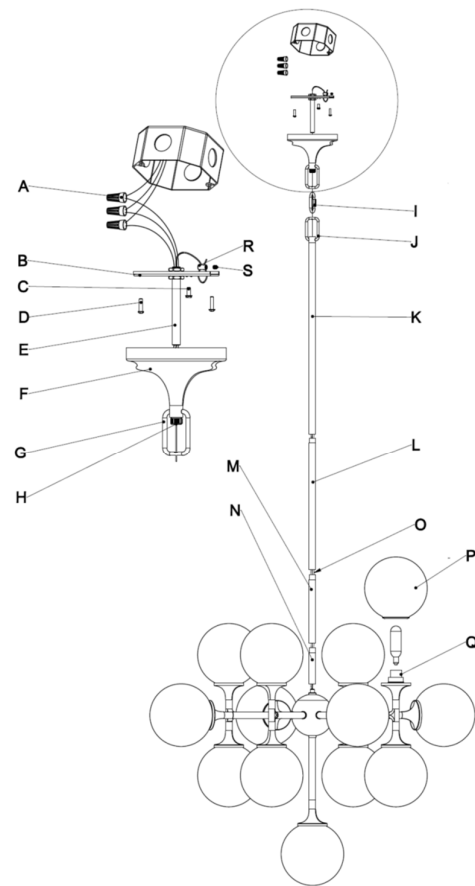