

# Splice Tray, Mass Fusion Splices or Heat-shrink Fusion Splices 0.4-in, 6 mass fusion splices or 12 heat-shrink fusion splices

CORNING

**Part Number:**  
**M67-110**

Corning splice trays use proven designs and fiber organization technology to provide optimum physical protection for fusion and mechanical splicing methods. The trays are engineered for use with indoor or outdoor splice hardware with both loose tube and tight-buffered optical cable designs. The metal-tray series consists of a rugged aluminum base and cover with crimpable metal tabs for buffer tube strain-relief. Additional strain-relief points are available for securing buffer tubes or pigtails to the trays using cable ties. The black powder coating allows easy fiber identification and additional protection. Designed for use with Corning interconnection hardware and splice closures, these splice trays are an integral part of a complete splicing system. Many of our fiber optic hardware products are highly configurable. If you don't see what you are looking for here, please review the ordering matrix contained in the family spec sheet found on the right, or contact Customer Care at 1-800-743-2675.

## Features and Benefits

### **Metal trays powder coated**

Ruggedness and durability

### **Used as a component of Corning's fiber distribution frame**


Flipcard for easier record keeping

### **Fiber loop retention**


Controls the bend radius

### **Positive holding action**

Maximum splice protection

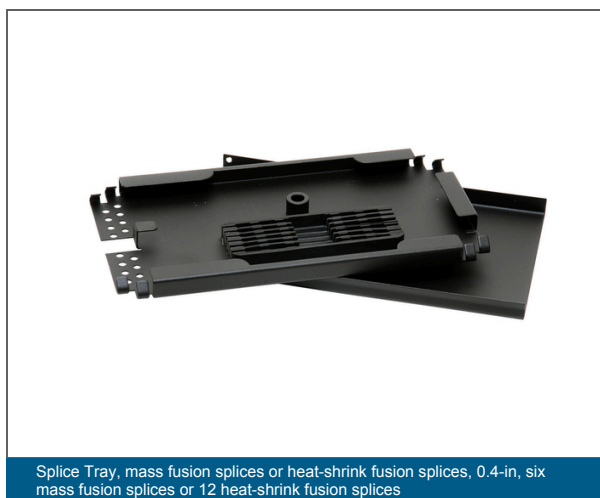

Splice Tray, mass fusion splices or heat-shrink fusion splices, 0.4-in, six mass fusion splices or 12 heat-shrink fusion splices

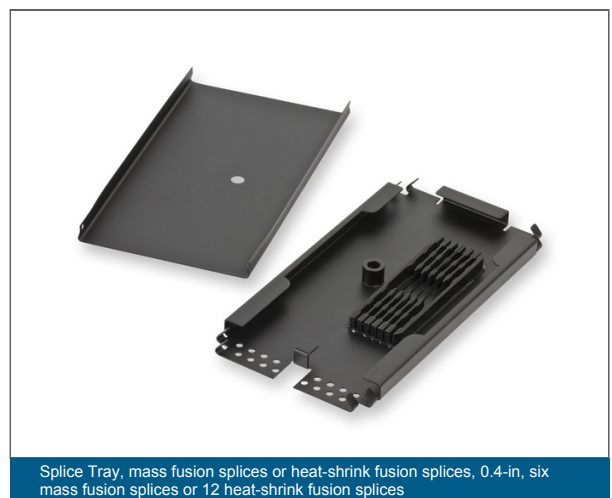

Splice Tray, mass fusion splices or heat-shrink fusion splices, 0.4-in, six mass fusion splices or 12 heat-shrink fusion splices

# Splice Tray, Mass Fusion Splices or Heat-shrink Fusion Splices 0.4-in, 6 mass fusion splices or 12 heat-shrink fusion splices

CORNING

## Specifications

### General Specifications

Product Type	Splice Trays
Technology	Fusion Splice
Application	Carrier Networks, CATV Environments, Central Office, Enterprise Networks

### Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

### Design

Splice Tray Type	Standard with organizers for heat-shrink mass fusion splice protectors
Splice Tray Category	4R
Housing Type	Splice Trays
Splice Protectors Type	Heat Shrink, Mass Fusion
Splice Tray Capacity Mass Fusion	72
Splice Tray Capacity Single Fiber	12

### Dimensions

Height	10 mm (0.39 in)
Width	175 mm (6.89 in)
Depth	89 mm (3.5 in)
Length	0 mm (0 in)

### Ordering Information

Product Number	M67-110
EAN Code	4056418192963

# Splice Tray, Mass Fusion Splices or Heat-shrink Fusion Splices 0.4-in, 6 mass fusion splices or 12 heat-shrink fusion splices

CORNING

## Ordering Information

Package Contents

Installation Guide; splice tray base with splice holder; splice tray cover

Units per Delivery

1/1



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States  
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.