
WOLVERINE BRASS, INC.
ESSENCE SINGLE CONTROL LAVATORY FAUCETS

85260 - CHROME
85263 - BRUSH NICKEL

FAUCET CONSTRUCTION:
- ☐ 35mm CERAMIC DISK CARTRIDGE WITH HOT LIMIT ADJ. RING.
- ☐ BRASS BODY WITH COPPER SUPPLIES.
- ☐ CHROME PLATED PLASTIC THROAT PLATE
- ☐ ZAMAC#3 CHROME PLATED METAL HANDLE AND DECK PLATE.
- ☐ BRASS SUPPLY CONNECTION ADAPTERS WITH 1/2"IPS THREADS.
- ☐ BRASS POP-UP ASSEMBLY ON ALL UNITS.

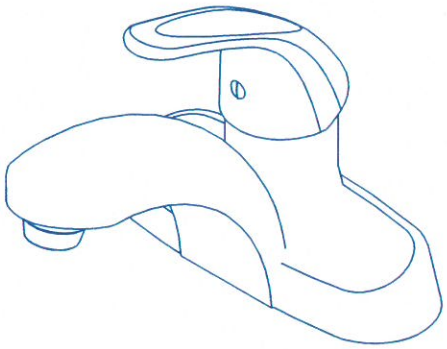

OPERATION:
- ☐ SINGLE CONTROL LEVER HANDLE.
- ☐ REQUIRES LESS THAN 5 LB FORCE TO OPERATE VALVE.
- ☐ TEMP. ADJUSTMENT 90° FROM FULL HOT TO FULL COLD.
- ☐ 1.2 GPM (4.5 L/min) AERATOR.

STANDARDS:
- ☐ IAPMO/UPC CERTIFIED:
  - — ASME A 112.18.1-2012/CSA B125.1-12
  - — NSF/ANSI 61-2012
  - — NSF/ANSI 372-2011 (LEAD FREE)
  - — WATERSENSE

MOUNTING SURFACE REQUIREMENTS:
- ☐ SURFACE THICKNESS 1-1/2" MAXIMUM.
- ☐ THREE 1-1/4" DIA. HOLES (2" ON CENTERS).

