




Z1341XL WALL FAUCET

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

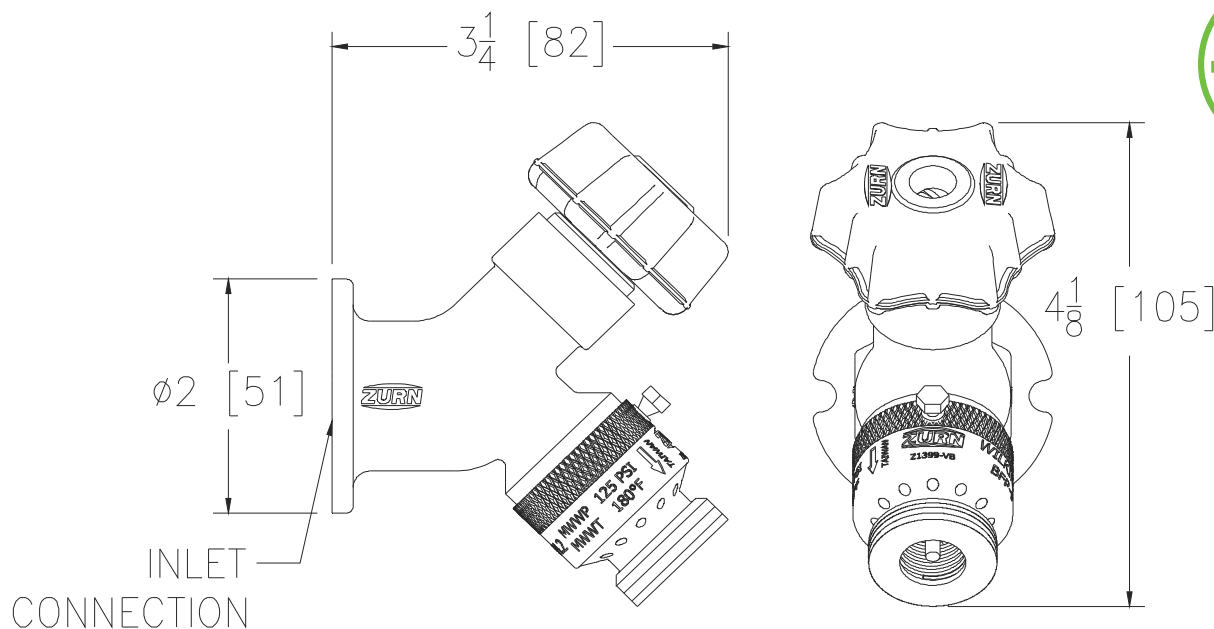

-P12 and -P34 Inlet Connection Shown

Inlet Connection	Inlet Description in [mm]	Approx. Wt. lbs [kg]
___ -C12	1/2 [13] Solder x 3/4 [19] Solder	2 [1]
___ -C12-PX	1/2 [13] PEX	2 [1]
___ -CP12	1/2 [13] Solder x 1/2 [13] MPT	2 [1]
___ -P12	1/2 [13] FPT	2 [1]
___ -P34	3/4 [19] FPT	2 [1]

ENGINEERING SPECIFICATION: ZURN Z1341XL

Exposed, lead-free, anti-siphon, moderate climate wall hydrant for residential and light commercial applications. Hydrant features Z1399-VB external vacuum breaker with 3/4" [19] male hose connection, bronze and stainless steel interior components, vandal resistant operating stem, and secured wheel-type handle. Hydrant is finished with rough bronze exterior with a choice of five different inlet connection options and includes an optional loose key.

OPTIONS (Check/specify appropriate options)

SUFFIXES

___ -PB	Polished Bronze Finish
___ -PC	Polished Chrome Finish
___ -RC	Rough Chrome Finish
___ -RK	Hydrant Parts Repair Kit

Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 3/23/15
C.N. No. 131803
Prod. | Dwg. No. Z1341XL