


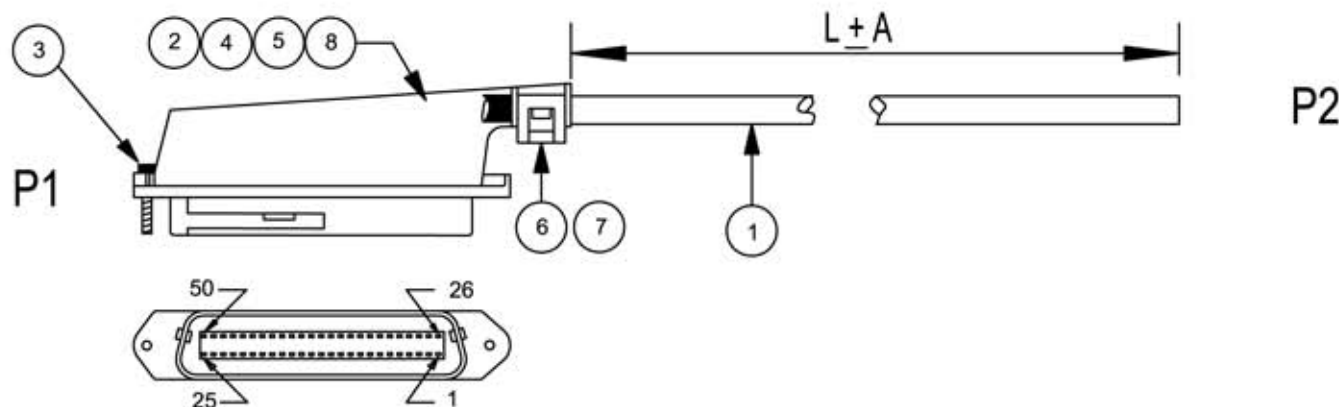

| P1 | P2 |
|----|----|
| 1  | 1  |
| 26 | 26 |
| 2  | 2  |
| 27 | 27 |
| 3  | 3  |
| 28 | 28 |
| 4  | 4  |
| 29 | 29 |
| 5  | 5  |
| 30 | 30 |
| 6  | 6  |
| 31 | 31 |
| 7  | 7  |
| 32 | 32 |
| 8  | 8  |
| 33 | 33 |

| P1 | P2 |
|----|----|
| 9  | 9  |
| 34 | 34 |
| 10 | 10 |
| 35 | 35 |
| 11 | 11 |
| 36 | 36 |
| 12 | 12 |
| 37 | 37 |
| 13 | 13 |
| 38 | 38 |
| 14 | 14 |
| 39 | 39 |
| 15 | 15 |
| 40 | 40 |
| 16 | 16 |
| 41 | 41 |

| P1 | P2 |
|----|----|
| 17 | 17 |
| 42 | 42 |
| 18 | 18 |
| 43 | 43 |
| 19 | 19 |
| 44 | 44 |
| 20 | 20 |
| 45 | 45 |
| 21 | 21 |
| 46 | 46 |
| 22 | 22 |
| 47 | 47 |
| 23 | 23 |
| 48 | 48 |
| 24 | 24 |
| 49 | 49 |
| 25 | 25 |
| 50 | 50 |

| P/N            | L     | A      |
|----------------|-------|--------|
| 25-3-PX-5-GY   | 1524  | 50.8   |
| 25-3-PX-10-GY  | 3048  | 50.8   |
| 25-3-PX-15-GY  | 4572  | 102    |
| 25-3-PX-20-GY  | 6096  | 102    |
| 25-3-PX-25-GY  | 7620  | 102    |
| 25-3-PX-30-GY  | 9144  | 102    |
| 25-3-PX-40-GY  | 12192 | 1.5% L |
| 25-3-PX-50-GY  | 15240 |        |
| 25-3-PX-75-GY  | 22860 |        |
| 25-3-PX-100-GY | 30480 |        |
| 25-3-PX-150-GY | 45720 |        |
| 25-3-PX-200-GY | 60950 |        |

| QTY | DESCRIPTION                     |
|-----|---------------------------------|
| 8   | 1 DUSTPROOF COVER: RED          |
| 7   | A/R PVC TUBE                    |
| 6   | 2 CABLE CLIP: 50P GRAY          |
| 5   | 2 PLASTIC SHELL: 50P GRAY       |
| 4   | 50 TERMINAL: M G/F P/N : A020-1 |
| 3   | 2 SCREW: #4-40 * L13.8mm        |
| 2   | 1 CONN: 50P M GRAY              |
| 1   | A/R CABLE: 24AWG * 25P GRAY     |

#### NOTES

1. 100% PASS CONTINUITY TEST
2. CAT3 RATED
3. UL LISTING: E154502



**Allen Tel Products, Inc.**  
30 TV5 DRIVE • HENDERSON, NV • 89014

**25-3-PX-XX-GY**  
**MALE SINGLE END CONNECTORIZED CABLES**