



Send Us a Text: 1-812-652-2525
(US and Canada Only.
Carrier Fees May Apply)



Find Us Online: www.safety1st.com
Email Us: support@djgusa.com



Give Us a Call: 1-800-544-1108
(Toll Free, US and Canada Only)



Replacement Parts List

(on select models)

- Seat Pad Set
- Chest Clip
- Buckle Assembly
- Removable Cup Holder(s)
- Top Tether
- Lower Anchor Belt
- Locking Clip
- Instructions

For parts availability and questions, call, text, or chat.

If requested color is not available, similar color will be substituted. Applicable tax and shipping and handling will also be added.


TriFit™ TriMate™

All-in-One Convertible Car Seat

Your model may look different than one shown on cover.

Read all instructions BEFORE USING this car seat.

KEEP INSTRUCTIONS FOR FUTURE USE.

 Failure to follow the warnings on the labels and in the instruction manual can result in serious injury or death to your child. Serious injury may include paralysis and/or permanent brain injury.




4358-8648A
09.26.25



Welcome to the Safety 1st Family!

Thank you for choosing this car seat, also known as a child restraint!

To help you get started using your child's new car seat, here are the 4 main tasks you'll need to complete.

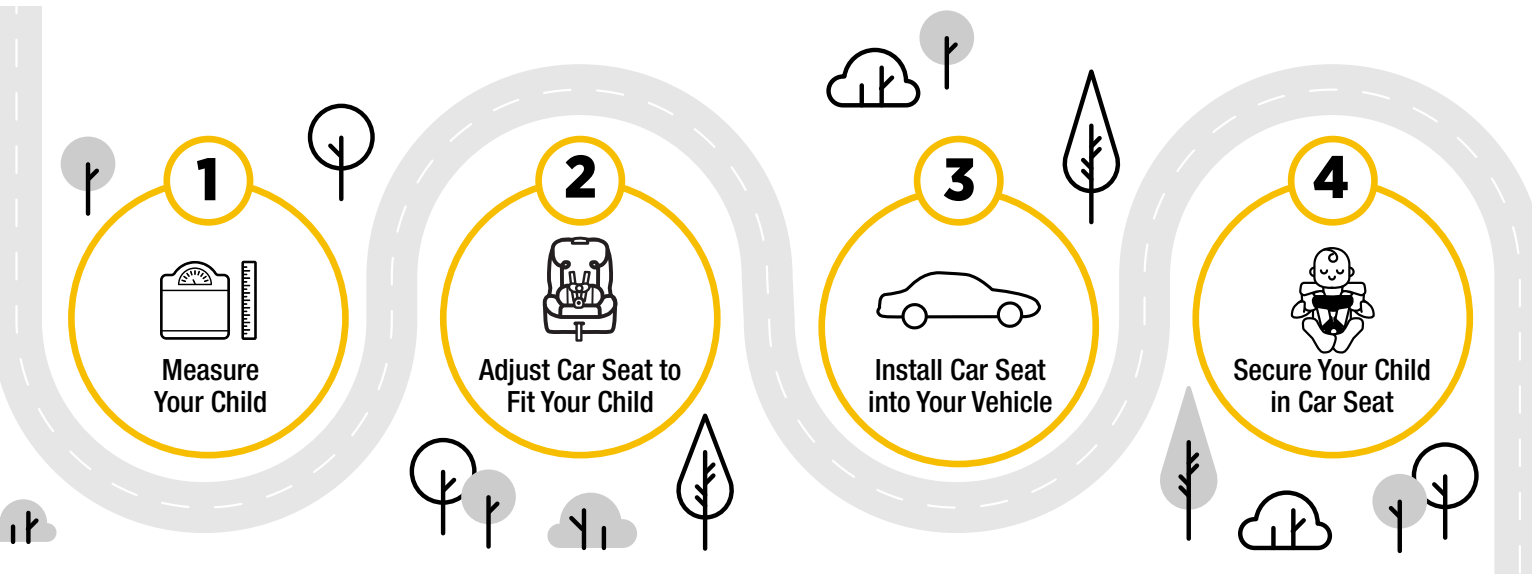

Your child's safety is worth the time it will take to read and follow these instructions.

Ready? Let's go!

Pages 1–3 will introduce you to the parts of the car seat.

The Back Cover of this Manual has our contact information. If at any point you would like assistance, please feel free to reach out to us.

©2025 Dorel Juvenile Group, Inc. Safety 1st™ and the Safety 1st logo and design are trademarks of Dorel Juvenile Group, Inc. (800) 544-1108 www.safety1st.com. Styles and colors may vary. Los estilos y los colores pueden variar. Made in USA from American and imported parts (including seat pad). Hecho en EE.UU. a partir de piezas americanas e importadas (incluyendo la almohadilla del asiento). Distributed by (distribuido por) Dorel Juvenile Group, Inc., 2525 State St., Columbus, IN 47201-7494. Dorel Juvenile Canada, 2233 Argentia Road, Suite 110, Mississauga, ON L5N 2X7. Representante exclusivo en Chile: DOREL JUVENILE CHILE S.A. Av. del Parque 4161, oficina 602 A, Huechuraba, Santiago, Chile - Fono: 56 2 24971500 - www.infanti.cl - www.dorel.cl. Importado y distribuido en Perú por: COMEXA COMERCIALIZADORA EXTRANJERA S.A. SUCURSAL DEL PERÚ - Los Libertadores 455, San Isidro, Lima 27, Lima, Perú RUC 20431062870 - Fono: 4413029 - www.infanti.com.pe. En Centro América, Caribe y Ecuador por: Best Brands Group S.A. - Av. Balboa, Bay Mall Plaza, Planta Baja, local 9, Panamá. - Fono: (507) 300 2884. En Colombia por: Baby Universe S.A.S. - Via 40 No. 77-29, Barranquilla, Colombia - Fono: (575) 353 1110 Importador: DJGM, S.A. DE C.V. Gabriel Mancera No. 1041 Col. Del Valle, Benito Juárez C.P. 03100 México, Ciudad de México R.F.C. DJG140305GN9 Tel. (55) 67199202



Contents

1 Getting Started

- 1 Parts of Car Seat
- 3 Accessory Use
- 4 Choosing Car Seat Mode

6 Rear-Facing Section

- 8 Rear-Facing Child Fit
- 10 Rear-Facing Vehicle Install

16 Forward-Facing Section

- 18 Forward-Facing Child Fit
- 20 Forward-Facing Vehicle Install

27 Securing Child in Car Seat

30 Booster Seat Section

- 32 Storing Harness System
- 35 Booster Seat Use in Vehicle
- 38 Booster Seat Child Fit

39 Making Adjustments to Car Seat

- 39 Changing Headrest/Harness Height
- 40 Changing Buckle Position
- 42 Buckle Adjustments
for Smaller Infants
- 44 Reclining Car Seat

45 Wash and Care

- 45 Removing Seat Pad Set
- 47 Cleaning Parts of Car Seat and
Installing Seat Pad Set
- 48 Installing Harness System

53 LATCH and Vehicle Belt Information


- 53 LATCH: Lower Anchor Belt
- 55 Vehicle Belts
- 59 Top Tether

60 Safety Information


- 60 Child Restraint Use
- 61 Vehicle Seating Position
- 62 Installation in Vehicle
- 63 Replacement and Expiration
- 64 Registration and Safety Notices
- 65 Aircraft Information

66 Warranty



Parts of Car Seat

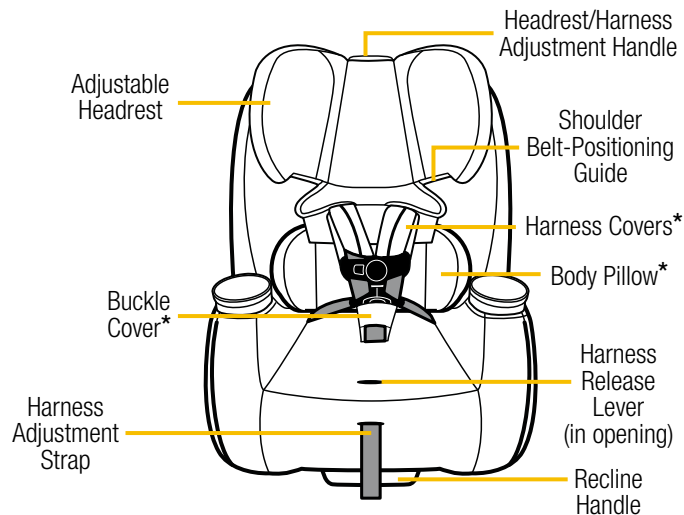


Harness System Detail

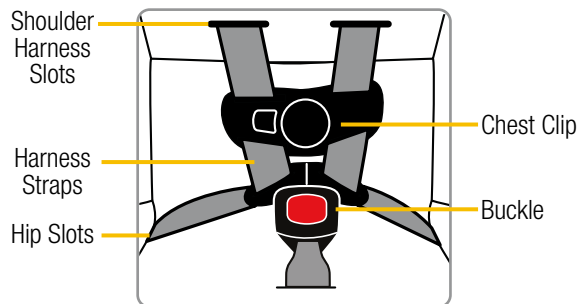

*See page 3 for Accessory Use.
Your model may look different than the one shown.

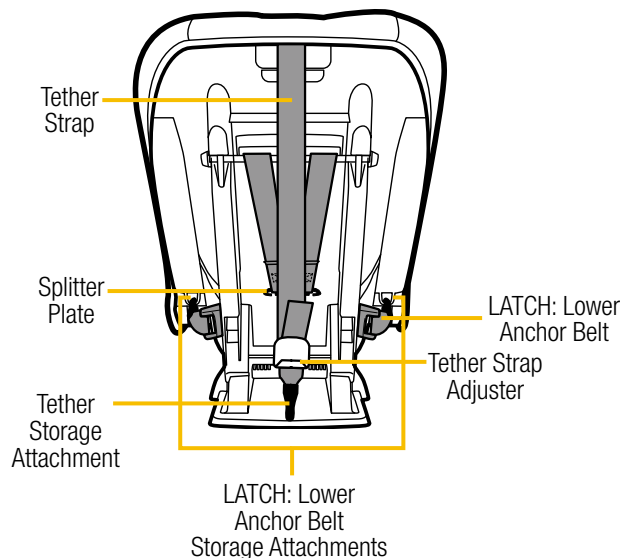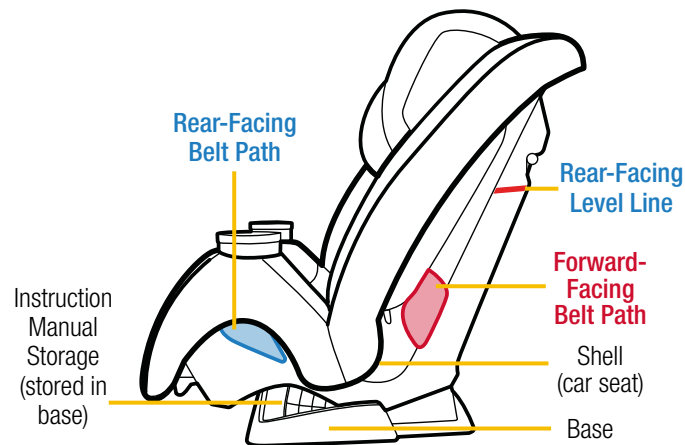




Body Pillow (on select models)

For Optional Use in **Rear-Facing Mode Only**

To remove, slide it out from behind the harness straps.





Harness Covers (on select models)

For Optional Use in **Rear-Facing Mode or **Forward-Facing Mode****

The harness covers help provide comfort to your child's neck.

If the harness covers will not allow proper positioning of the chest clip or interfere with getting a tight enough harness fit for a smaller infant, remove and do not use. Store until your child is large enough to use the harness covers while maintaining a properly fitting harness.


To remove, pull the fastening strips apart and pull the harness covers off of the harness straps.



Buckle Cover (on select models)

For Optional Use in **Rear-Facing Mode or **Forward-Facing Mode****

To remove, undo the buckle and pull the buckle cover off of the buckle.



Removable Cup Holder(s) (on select models)

For Use in All Modes

The cup holder(s) is top-rack dishwasher safe.

To remove cup holder, twist the cup holder counterclockwise. Pull it out of the slot in the car seat.



⚠ WARNING

Failure to follow these instructions may result in serious injury or death to your child. Serious injury can include paralysis and/or permanent brain injury.

Be certain to measure your child's weight and height (do not guess) before choosing this car seat's mode.

Your child's height, weight, and age determine how the car seat should be placed in the vehicle.

Children vary widely in body size, shape, and temperament—**please consult your doctor before switching between any modes within the limits and fit requirements of the car seat.**

Infants and Toddlers

Children must ride rear-facing and remain rear-facing until they reach the maximum weight or height limits for rear-facing mode. Rear-facing child restraints installed behind another vehicle seat must be installed touching the back of the vehicle seat in front of it, or be as close as possible.

Toddlers and Preschoolers

Children can only use a forward-facing car seat once they outgrow rear-facing weight or height limits. Once they are forward-facing, children must use their child restraint in forward-facing mode with a harness until they reach the maximum weight or height limits for forward-facing harness mode.

School-Aged Children

Children can only use a belt-positioning booster car seat once they outgrow forward-facing harness weight or height limits. Children must use the belt-positioning booster mode until the vehicle's lap and shoulder seat belt fit them properly without the belt-positioning booster.



Rear-Facing Mode

**5–40 lb (2.3–18 kg) and
19–40 in. (48–101.6 cm)**

In this car seat, your child **MUST** ride **Rear-Facing** and remain in **Rear-Facing** mode until they outgrow any one of the above.

Rear-Facing Section PAGE 6
Rear-Facing Child Fit PAGE 8
Rear-Facing Vehicle Install PAGE 10



Forward-Facing Mode

**30–65 lb (13.7–29.5 kg) and
34.4–49 in. (87.1–125 cm)**

In this car seat, your child **MUST** remain in harnessed **Forward-Facing** mode until they outgrow any one of the above.

Forward-Facing Section PAGE 16
Forward-Facing Child Fit PAGE 18
Forward-Facing Vehicle Install PAGE 20




Booster Seat Mode

**40–100 lb (18.1–45.4 kg) and
43.4–52 in. (110.1–132.1 cm)**

In this car seat, your child can use the **Booster Seat** mode until they fit the vehicle's lap and shoulder seat belt properly without a **Booster Seat** **OR** outgrow any one of the above.

Booster Seat Section PAGE 30
Storing Harness System PAGE 32
Booster Seat Use in Vehicle PAGE 35
Booster Seat Child Fit PAGE 38

Rear-Facing Section

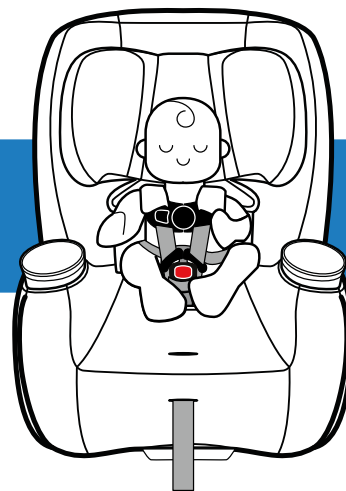

**5–40 lb (2.3–18 kg) and
19–40 in. (48–101.6 cm)**

In this car seat, your child **MUST** ride **Rear-Facing** and remain in **Rear-Facing** mode until they outgrow any one of the following:

- **Weight Limit:** 40 lb (18 kg); **OR**
- **Height Limit:** 40 in. (101.6 cm); **OR**
- **Rear-Facing Child Fit** requirements, see pages 8–9.

Before installing the car seat in your vehicle, check your child's fit in the car seat.

This way you won't have to redo the vehicle installation to make adjustments to the car seat.

Rear-Facing Child Fit: Page 8

Rear-Facing Vehicle Install: Page 10

⚠ WARNING



NEVER install a rear-facing child restraint in the front seat of a vehicle equipped with an active frontal airbag.

DO NOT use the tether for rear-facing mode. Secure the tether strap hook to its storage attachment.

DO NOT use the lower anchor belt along with the vehicle lap or lap/shoulder belt.

DO NOT fasten multiple lower anchor hooks on the same lower anchor bar in the vehicle.


Check the vehicle belt or the lower anchor belt before each use.

Use **ONLY** if the belt can be tightened properly and locked securely in place.

Even when unoccupied, this child restraint **MUST** be firmly secured to the vehicle with the lower anchor belt or with the vehicle seat belt.

This child restraint **MUST ALWAYS** face the rear of the vehicle until the child has reached the maximum weight or height limit for the rear-facing mode.


1



Fully Loosen Harness Straps

Push down on the harness release lever (through the opening in the pad) while pulling out on the harness straps as shown.

2




Undo Chest Clip and Buckle

While holding both sides of the chest clip, press the release button with your thumb and pull the chest clip apart.



To unbuckle the harness, press the red button to release the buckle tongues.


3



Place Child in Car Seat

Your child's bottom and back should be flat against the car seat.


4



Check Head Position

The top of your child's head **MUST** be at **least 1 in. (2.5 cm)** below the top of the car seat's headrest.


5



Check Harness Strap Position

The harness strap **MUST** be placed **at the shoulder** when possible, or slightly below; never above.

6



Check Buckle Position

- Use the slot closest to your child.
- The buckle strap **should not be underneath or behind** your child.

DO NOT use the 3rd buckle slot in **Rear-Facing Mode**.



To change the harness strap height, see page 39.

To change the buckle position, see page 40.

To learn how to check harness tightness, see pages 27–29.

If you cannot achieve a snug harness fit for your child, see pages 42–43.

There are 2 different methods for install.

Use only one:



Vehicle Belt

OR



LATCH: Lower Anchor Belt


! WARNING

DO NOT use both the LATCH: lower anchor belt and vehicle belt at the same time to install the car seat.



- Before installing the car seat in your vehicle, check to see if you need to adjust the buckle position for your child. **See step 6 on page 9.** Once the car seat is installed, you will not be able to adjust the buckle position.
- **Review vehicle owner's manual.** Determine the type of vehicle belts in your car and how to use them to lock a car seat in place **OR** where LATCH: lower anchor seating positions are located in your vehicle.
- If you are using a vehicle belt to install the seat, make sure the lower anchor belt is stored away (see page 54).
- Make sure the tether strap is properly stored away (see page 59).

1




Place Car Seat Rear-Facing in Back Seat


The car seat base **MUST** be flat on the vehicle seat.

When using the passenger or driver-side locations, the car seat **MUST** be touching the back of the vehicle seat in front of it, or be as close as possible.

2



Recline Car Seat and Check Rear-Facing Level Line




For children who cannot sit up unassisted, the **Rear-Facing Level Line** on the car seat **MUST** be parallel with the ground using either Position 2 or 3.

For children who can sit up unassisted, you may make the car seat more upright in Position 2.


DO NOT use **Position 1** for **Rear-Facing Mode**.

See Reclining Car Seat on page 44.

3




OR



Locate **Rear-Facing Belt Path** and Route Vehicle Belt or Lower Anchor Belt through It

For the Lower Anchor Belt: Pull the entire lower anchor belt over to the child's right as shown.




You may need to fully lengthen the belt before routing it into the belt path. Squeeze the adjuster button and pull the belt out as shown.



Then route the hook **on the adjuster end** through the **Rear-Facing Belt Path**.

4



Vehicle Belt or Lower Anchor Belt Goes:

- Under the car seat pad; **AND**
- Across the car seat; **AND**
- In front of the buckle; **AND**
- Out the other **Rear-Facing Belt Path** opening.

DO NOT twist the belt.




Adjuster


Finished Lower Anchor Belt Routing

The lower anchor belt adjuster **MUST** be on the child's left.

5



OR




Buckle Vehicle Belt

If your car has a **switchable retractor**, use it to lock the vehicle belt. Review page 57 of this manual or your vehicle owner's manual.

Attach Lower Anchor Belt Hooks to Vehicle's Lower Anchors


6



Tighten Belt


Place your hand in the car seat and firmly push the car seat down and back towards the vehicle seat.

Pull the belt towards you and parallel (in line) with the belt path as shown.



For the Lower Anchor Belt or Lap Only Vehicle Belt: it may be easier to tighten if you route the free end of the belt back into the **Rear-Facing Belt Path**, reach into the **Rear-Facing Belt Path**, and pull the free end of the belt towards you.

7



more than **1 in.** (2.5 cm) at the belt path.

Check Belt Tightness

Hold the **Rear-Facing Belt Path** with your non-dominant hand. Push and pull the car seat from side to side.


The car seat should not move



If the car seat moves more than 1 in. (2.5 cm), you can try:

- Pulling the belt tighter; **OR**
- Reinstalling the car seat; **OR**
- Changing to a different seating location; **OR**
- Switching to a different install method (LATCH or vehicle belt).


8



Secure Child in Car Seat


See pages 27–29.

9



Recheck Rear-Facing Level Line

Redo the installation if the car seat is not reclined correctly for your child. See step 2 and the info box on page 11.



Only if necessary, you may place a tightly rolled towel(s) or foam pool noodle(s) under the front of the car seat base to help make the **Rear-Facing Level Line** parallel with the ground.

Check often to make sure padding is still in place and the belt is tight.

FINISHED!



Lap/Shoulder Belt




Lap Belt



LATCH: Lower Anchor Belt

- ☒ **Vehicle Belt Install:** Is the vehicle belt locked?
See step 5.
- ☒ **LATCH: Lower Anchor Belt Install:** Are the hooks securely attached to the vehicle's lower anchors? See step 5.
- ☒ Is the belt tightened enough so that the car seat does not move more than 1 in. (2.5 cm) from side to side at the belt path? Check the tightness of the install often to make sure it has not loosened. See steps 6 and 7.
- ☒ If your child cannot sit up unassisted, is the **Rear-Facing Level Line** parallel with the ground? See steps 2 and 9 and the info box on page 11.

When using the passenger or driver-side locations, the car seat **MUST** be touching the back of the vehicle seat in front of it, or be as close as possible.

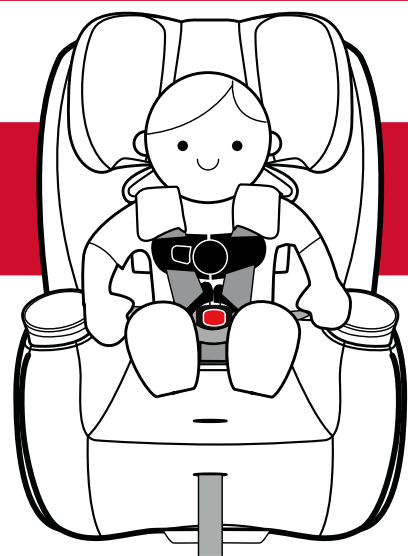

**30–65 lb (13.7–29.5 kg) and
34.4–49 in. (87.1–125 cm)**

In this car seat, your child **MUST** remain in harnessed **Forward-Facing** mode until they outgrow any one of the following:

- **Weight Limit:** 65 lb (29.5 kg); **OR**
- **Height Limit:** 49 in. (125 cm); **OR**
- **Forward-Facing Child Fit** requirements, see pages 18–19.

Before installing the car seat in your vehicle, check your child's fit in the car seat.

This way you won't have to redo the vehicle installation to make adjustments to the car seat.

Forward-Facing Child Fit: Page 18

Forward-Facing Vehicle Install: Page 20

⚠️ WARNING

DO NOT use the lower anchors of the child restraint anchorage system (LATCH system) to attach this child restraint when restraining a child weighing more than 55 lb (24.9 kg).

The vehicle belt **MUST** be used for installation if your child weighs more than 55 lb (24.9 kg).

When anchors are available you **MUST ALWAYS** attach, adjust, and secure the tether (top anchorage) strap when installing the car seat in the Forward-Facing Mode with internal harness.

DO NOT use the lower anchor belt along with the vehicle lap or lap/shoulder belt.

Check the vehicle belt or the lower anchor belt before each use.


Use **ONLY** if the belt can be tightened properly and locked securely in place.

DO NOT fasten multiple lower anchor hooks on the same lower anchor bar in the vehicle.

Even when unoccupied, this child restraint **MUST** be firmly secured to the vehicle with the lower anchor belt or with the vehicle seat belt.

Before using this seat in Forward-Facing mode, your child must have outgrown the seat in Rear-Facing mode.


1



Fully Loosen Harness Straps

Push down on the harness release lever (through the opening in the pad) while pulling out on the harness straps as shown.

2




Undo Chest Clip and Buckle

While holding both sides of the chest clip, press the release button with your thumb and pull the chest clip apart.



To unbuckle the harness, press the red button to release the buckle tongues.


3



Place Child in Car Seat

Your child's bottom and back should be flat against the car seat.


4



Check Head Position

The top of your child's ears **MUST** be below the top of the car seat's headrest.


5



Check Harness Strap Position

The harness strap **MUST** be placed **at the shoulder** when possible, or slightly above; never below.

6



Check Buckle Position

- Use the slot closest to your child.
- The buckle strap **should not be underneath or behind** your child.

The buckle can be used in **any** buckle slot.



To change the harness strap height, see page 39.

To change the buckle position, see page 40.

To learn how to check harness tightness, see pages 27–29.

Forward-Facing Vehicle Install

There are 2 different methods for install.

Use only one:



OR



Vehicle Belt + Tether

for a child up to 65 lb (29.5 kg)

LATCH: Lower Anchor Belt + Tether

Do not install by this method for a child weighing more than 55 lb (24.9 kg).

⚠ WARNING


DO NOT use both the LATCH: lower anchor belt and vehicle belt at the same time to install the car seat.

When anchors are available, you **MUST ALWAYS** attach, adjust, and secure the tether (top anchorage) strap when installing the car seat in the Forward-Facing Mode with internal harness.




- Before installing the car seat in your vehicle, check to see if you need to adjust the buckle position for your child. **See step 6 on page 19.**
- **Review vehicle owner's manual.** Determine what kind of vehicle belts your car has and how to use them to lock a car seat in place **OR** where LATCH: lower anchor seating positions are located in your vehicle.
- If you are using a vehicle belt to install the seat, make sure the lower anchor belt is stored away (see page 54).

1




For Lower Anchor Belt Installation Only: Remove Lower Anchor Belt from Storage Location

Or if the lower anchor belt was used **Rear-Facing**, remove the belt from the **Rear-Facing Belt Path** so both hooks are on the same side of the car seat as shown.



2



Put Car Seat Upright into Position 1 and Place Car Seat **Forward-Facing** in Back Seat


The base of the car seat **MUST** be flat against the vehicle seat bottom and **MUST** be parallel to the vehicle seat bottom. Make sure the entire base is completely on the vehicle seat. The vehicle seat back **MUST** be in the upright position, but you can adjust the angle slightly to better match the angle of the car seat. Refer to the vehicle owner's manual for how to adjust the vehicle seat back.

i



If your vehicle has a headrest that interferes with a flush car seat fit, check your vehicle owner's manual to see if it can be removed, adjusted, or if there are other possible seating locations for you to install.


3



Locate Vehicle Top Tether Anchors

Review your vehicle owner's manual for top tether anchor locations and how to route the tether strap when there are vehicle headrests.

4




Loosen Tether Strap

Remove the tether hook from its storage location first if necessary (see page 59).

Lift the tether adjuster to loosen the strap. Or, if your car seat has an adjuster with a button, then squeeze the adjuster button and pull the strap to loosen as shown.




5



Attach Tether Hook to Vehicle's Top Tether Anchor

23

6




Locate **Forward-Facing Belt Path** and Route Vehicle Belt or Lower Anchor Belt through It

For the Lower Anchor belt:
You may need to fully lengthen the belt before routing it into the belt path.

Squeeze the adjuster button and pull the belt out as shown.



7



Vehicle Belt or Lower Anchor Belt Goes:


- Under the car seat pad; **AND**
- Across the car seat; **AND**
- Out the other **Forward-Facing Belt Path** opening.

DO NOT twist the belt.

i


Finished Lower Anchor Belt Routing

The lower anchor belt adjuster can be on either side of the car seat.



Adjuster

8





Buckle Vehicle Belt

If your car has a **switchable retractor**, use it to lock the vehicle belt. Review page 57 of this manual or your vehicle owner's manual.

Attach Lower Anchor Belt Hooks to Vehicle's Lower Anchors

9




Tighten Belt

Place your hand in the car seat and firmly push the car seat down and back towards the vehicle seat.

Pull the belt towards you and parallel (in line) with the belt path as shown.

For the Lower Anchor belt or Lap Only Vehicle Belt: it may be easier to tighten if you route the free end of the belt back into the **Forward-Facing Belt Path**, reach into the **Forward-Facing Belt Path**, and pull the free end of the belt towards you.

10



Check Belt Tightness

Hold the **Forward-Facing Belt Path** with your non-dominant hand. Push and pull from side to side.


The car seat should not move more than **1 in.** (2.5 cm) at the belt path.

i

If the car seat moves more than 1 in. (2.5 cm), you can try:

- Pulling the belt tighter; **OR**
- Reinstalling the car seat; **OR**
- Changing to a different seating location; **OR**
- Switching to a different install method (LATCH or vehicle belt).


11



Tighten Tether

Push firmly on the back of the car seat and pull the free end of the tether strap to remove all of the slack.

FINISHED!




Lap/Shoulder Belt + Tether

for children up to 65 lb (29.5 kg)



Lap Belt + Tether

for children up to 65 lb (29.5 kg)




LATCH: Lower Anchor Belt + Tether

Do not install by this method for children weighing more than 55 lb (24.9 kg).

- ✓ **Vehicle Belt Install:** Is the vehicle belt locked? See step 8.
- ✓ **LATCH: Lower Anchor Belt Install:** Are the hooks securely attached to the vehicle's lower anchors? See step 8.
- ✓ Is the belt tightened enough so the car seat does not move more than 1 in. (2.5 cm) from side to side at the belt path? Check the tightness of the install often to make sure it has not loosened. See steps 9 and 10.
- ✓ Has the tether been installed and tightened? See steps 5 and 11.


1



Place Child in Car Seat

Your child's bottom and back should be flat against the car seat.


2



Buckle Harness

Pull the harness straps up to make sure the buckle is locked.


3



Fasten Chest Clip

Insert right half of the chest clip into the left half and snap together.


4



Tighten Harness

Pull the harness adjustment strap straight out to snugly tighten the harness.


5



Position Chest Clip

Slide the chest clip up the harness straps and position it at mid-chest (even with armpits) and away from your child's neck.

6



Check Harness Tightness

Unfasten the harness covers.

Try to pinch the harness at the shoulders vertically between index finger and thumb as shown.

If your fingers slip off, the harness is tight enough.

If you can pinch the harness strap, tighten more.

Fasten the harness covers.

i

A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.

If one side of the harness is tighter than the other, lengthen the tighter side by pulling up the harness near the hip slot.

FINISHED!



Your child is now secured in the car seat. Check your child's fit often and make any needed adjustments to the car seat as they grow.

To Remove Child from Car Seat:

- 1. Loosen harness strap.
- 2. Unbuckle harness.
- 3. Release chest clip.
- 4. Remove child.

Clean with warm water and/or remove the object with tweezers. If you cannot get the harness to adjust and remain tight with the buckle securely locked, **DO NOT** use this car seat.

Troubleshooting

1. If the buckle or harness release lever sticks: **DO NOT lubricate.** Check for dropped food, sticky spilled drinks, dirt, leaves, etc.

2. If your harness twists: Straighten the harness each time you put your child in the car seat. Lock the buckle and tighten the harness so it will be ready for next use.

⚠️ WARNING

Failure to fasten and tighten the harness system correctly may allow the child to be ejected from the child restraint in a crash or sudden stop causing serious injury or death. Serious injury can include paralysis and/or permanent brain injury.

DO NOT mistake comfort for safety. The harness system **MUST** be snugly adjusted.



DO NOT put snowsuits or bulky garments on your child when placing them in the child restraint.

Bulky clothing can prevent the harness straps from being tightened properly.



40–100 lb (18.1–45.4 kg) and 43.4–52 in. (110.1–132.1 cm)

In this car seat, your child can use the **Booster Seat** mode until they fit the vehicle's lap and shoulder seat belt properly without a **Booster Seat** OR outgrow any one of the following:

- **Weight Limit:** 100 lb (45.4 kg); OR
- **Height Limit:** 52 in. (132.1 cm); OR
- **Booster Seat Child Fit** requirements, see page 38.

You **MUST** store the harness system and remove the accessories, except the cup holder(s), when using the **Booster Seat Mode**.

To remove accessories, see page 3.

Storing Harness System: Page 32

Booster Seat Use in Vehicle: Page 35

Booster Seat Child Fit: Page 38

⚠️ WARNING

DO NOT use the harness system when using as a booster seat.

DO NOT use LATCH when using as a booster seat. Secure the lower anchor belt and the tether strap to their storage attachments.

Warning! Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat.




DO NOT use only the lap belt when using this seat as a booster seat. The shoulder belt **MUST** always be adjusted snugly across the child's chest.

NEVER place shoulder belt under the child's arms or behind their back.

DO NOT use this booster seat if the top of your child's ears are above the top of the booster seat's headrest.

To remove accessories, see page 3.


1



**Fully Loosen
Harness Straps**


Remove harness covers.

2




**From Back of Car
Seat, Remove Harness
Strap Loops from
Splitter Plate**

3



**Pull Harness Straps
Out of Shoulder
Harness Slots**


4



**Unthread Harness
Straps from Chest Clip
and Buckle Tongues**


DO NOT undo the buckle.

5



Adjust Headrest to Highest Position


6



Rethread Harness Straps through Shoulder Slots


To install harness straps, see pages 49–52.

7




From Back of Car Seat, Attach Harness Strap Loops To Splitter Plate

8




Place Harness Straps Behind Seat Pad

- a. Undo the fabric tab fasteners on both the headrest pad and seat pad.
- b. Tuck the harness pads completely behind the seat pad as shown.





9




Redo Fasteners on Seat Pad and Headrest Pad

- a. Fasten the two tabs on the lower backrest pad. Tuck the bottom of the headrest pad behind the lower backrest pad.
- b. Fold and tuck the fabric shoulder panels through the shoulder belt-positioning guides. Fasten both tabs on the headrest pad.




10



Tighten Harness


11



Remove Buckle and Buckle Cover


Recline the car seat. Reach under the car seat. Rotate the buckle's metal retainer and push it up through the car seat.

12



From Top of Car Seat, Pull Buckle and Buckle Cover Out of Shell and Pad

FINISHED!



The car seat has been converted to the **Booster Seat Mode**.

See the next section for **Booster Seat Use in Vehicle**.

Please be sure to store the buckle with buckle tongues, buckle cover, harness covers, and chest clip in a safe place for future use.

Booster Seat Use in Vehicle


1



Put Booster Seat Upright into Position 1 and Place **Booster Seat Forward-Facing** in Back Seat


The car seat back **MUST** be flush against the vehicle seat back. The base of the car seat may not be flat against the vehicle seat bottom. The vehicle seat back **MUST** be in the upright position, but you can adjust the angle slightly to better match the angle of the car seat. Refer to the vehicle owner's manual for how to adjust the vehicle seat back.

i



If your vehicle has a headrest that interferes with a flush car seat fit, check your vehicle owner's manual to see if it can be removed, adjusted, or if there are other possible seating locations for you to install.


2



Have Child Sit in Booster Seat

The top of your child's ears should never be above the top of the booster seat's headrest.


3



Position Lap Belt on Child

Route the lap and shoulder belts through the **Booster Seat Belt Path** as shown. The lap belt should lay snugly across your child's hips, **not on their stomach**.


4



Buckle Vehicle Belt


Pull the shoulder belt up to tighten.

5



Position Shoulder Belt on Child

Thread the shoulder belt through the belt-positioning guide in the headrest.



Pull the shoulder belt up to tighten so that it lies snugly across the center of your child's shoulder and across their chest.

FINISHED!




Check periodically to make sure your child has not moved out of position and loosened the shoulder belt.



Keep the booster seat securely belted even when unoccupied.


Check Head Position

The top of your child's ears should **never be above** the top of the booster seat's headrest.




Check Car Position

DO NOT use the booster seat if your child's head is less than 5 in. (12.7 cm) below the roof of the car. Consult your vehicle manual for proper seatbelt usage.




Check Shoulder Belt Position

The shoulder belt should lay snugly across the center of your child's shoulder and across their chest.




Check Lap Belt Position

The lap belt should lay snugly across your child's hips, **not on their stomach**.



Changing Headrest/ Harness Height


1



Fully Loosen Harness Straps

Push down on the harness release lever (through the opening in the pad) while pulling out on the harness straps as shown.

2





Adjust Headrest/ Harness Height

1. Squeeze the adjustment handle lever up.
2. Move the headrest up or down to the proper height for your child.

3. Release the handle to lock in place.
4. Make sure it is locked securely.



To Use Headrest in Lower Positions:



Fold bottom of headrest pad up underneath middle section of headrest pad as shown.


For Rear-Facing Child Fit, see page 8.
For Forward-Facing Child Fit, see page 18.
To learn how to check harness tightness, see pages 27–29.
If you cannot achieve a snug harness fit for your child, see pages 42–43.
Check the harness straps often for any wear or damage.

Changing Buckle Position

⚠️ WARNING

Failure to place buckle's metal retainer completely through pad and child restraint can result in serious injury or death. Serious injury can include paralysis and/or permanent brain injury.


1



Undo Buckle


Press the red button to release the buckle tongues.

2




Recline Car Seat

Reach under the car seat. Rotate the buckle's metal retainer and push it up through the car seat.




3



**From Top of Car Seat,
Pull Buckle and
Buckle Cover Out of
Car Seat and Pad**

4



Insert Buckle's Metal Retainer into Buckle Slot Closest to Child


The buckle **MUST** face out.

Tuck the ends of the buckle cover into the same pad slot as the buckle.

Rear-Facing Mode: You **MUST** use the **1st or 2nd** buckle slot.

Forward-Facing Mode: **Any** slot can be used.

5



Reach Under Car Seat Between Base and Car Seat

Pull the buckle's metal retainer completely through the seat pad and car seat.

6



Check Buckle

Pull the buckle up to make sure it is secured.

The buckle **MUST NOT** pull out.

i

For Rear-Facing Child Fit, see page 8.

For Forward-Facing Child Fit, see page 18.

To learn how to check harness tightness, see pages 27–29.

If you cannot achieve a snug harness fit for your child, see pages 42–43.

Buckle Adjustments for Smaller Infants


i

If you cannot achieve a snug harness fit for your child, you may need to adjust the buckle strap position and location as shown in this section.

⚠ WARNING

Failure to place buckle's metal retainer completely through pad and child restraint can result in serious injury or death. Serious injury can include paralysis and/or permanent brain injury.


1



With Buckle in 1st Slot, Fully Recline Car Seat

If you need to move the buckle to the 1st slot, see pages 40–41.


2



Pull Front of Car Seat Pad Up

continued on next page


3



Reach Under Car Seat

While keeping the buckle in the first slot, reach under the seat and pull the buckle's metal retainer down and away from the first slot. Push the metal retainer up into the middle slot from below the car seat as shown.


4



From Top of Car Seat, Lay Metal Retainer Flat Against Car Seat

The buckle strap should still be in the first slot while the metal retainer is flat against the car seat in the second slot as shown.

5



Tuck Car Seat Pad Around Front of Car Seat and Check Buckle

Pull up on the buckle to make sure it is secured.
The buckle **MUST NOT** pull out.



This car seat has 3 positions.

Rear-Facing Mode - Position 3 Reclined or Position 2 Semi-reclined


For children **who cannot** sit up unassisted, the **Rear-Facing Level Line** on the car seat **MUST** be parallel with the ground using either Position 2 or 3.

For children **who can** sit up unassisted, you may make the car seat more upright in Position 2.

DO NOT use Position 1 for **Rear-Facing Mode**.

Forward-Facing Mode - Position 1 Fully upright

Booster Seat Mode - Position 1 Fully upright



To Recline: Pull the recline handle out and push the top of the car seat back.

For More Upright: Pull the recline handle out and pull the top of the car seat forward.

i

In **Forward-Facing Mode** or **Booster Seat Mode**, the vehicle seat back **MUST** be in the upright position, but you can adjust the angle slightly to better match the angle of the car seat. Refer to the vehicle owner's manual for how to adjust the vehicle seat back.

Removing Seat Pad Set


i

You do not need to remove the harness system to remove the pad from the car seat.

DO NOT fully pull the harness strap out of the car seat. Leave it threaded in the hip harness slots. If removed, you will not be able to rethread it.


To remove accessories, see page 3.

1



Fully Loosen Harness Straps


2



Adjust Headrest to Highest Position

Squeeze up on back of handle to raise the headrest.



3



Undo Fasteners on Headrest Pad and Seat Pad

Undo the fabric tab fasteners on both the headrest pad and seat pad.


4



Gently Pull Off Headrest Pad


Gently pull the headrest pad off from one side of the headrest. Pull out the center fabric tab on the back of the headrest and then continue pulling the pad off the other side. Unfasten the chest clip if needed to fully remove the headrest pad.

5



Pull Seat Pad Off Sides and Front of Car Seat


6



Lower Headrest and Pull Seat Pad Around Headrest and Off Car Seat

Unbuckle the harness to pull the seat pad over the buckle and off the car seat.

i



If harness straps have been removed from chest clip and buckle, rethread them:

The harness strap ends go through the **back** of the buckle tongues and through the chest clip **front to back**.

See Installing Harness System, pages 48–52.

Cleaning Pad and Accessories

Machine wash separately with cold water on a gentle cycle. Make sure the harness covers are closed so the fastening strips are not exposed. **DO NOT** use bleach. Tumble dry separately for 10–12 minutes on low heat. Remove immediately.

Cleaning Harness Strap


Check the harness straps often for any wear or damage. Spot clean using warm sudsy water and damp cloth. Spilled food and liquids on the car seat may result in mold or bacterial growth over time. These spills could also attract insects or rodents.

Cleaning Buckle and Car Seat

Spot clean using warm sudsy water and damp cloth. **DO NOT** submerge into water.

Installing Seat Pad Set

1. Lower headrest to middle of car seat.
2. Pull seat pad around headrest and onto car seat.
3. Pull headrest pad onto headrest.
4. Fasten the two tabs on the lower backrest pad. Tuck the bottom of the headrest pad behind the lower backrest pad. If using the seat in **Rear-Facing** or **Forward-Facing** mode, tuck in the fabric shoulder panels as shown so they cover the shoulder belt-positioning guides (see step 9 on page 34 for booster use). Fasten both tabs on the headrest pad.

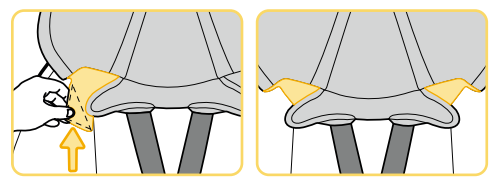

To install accessories, see page 3.

! WARNING


DO NOT use the child restraint without the seat pad or with damaged harness straps.

Installing Buckle

! WARNING


Failure to place buckle's metal retainer completely through pad and child restraint can result in serious injury or death. Serious injury can include paralysis and/or permanent brain injury.

1



Recline Car Seat

2




Insert Buckle's Metal Retainer into Buckle Slot Closest to Child

The buckle **MUST** face out.

Rear-Facing Mode:
You **MUST** use the 1st or 2nd buckle slot.

Forward-Facing Mode:
Any slot can be used.

3




Reach Under Car Seat Between Base and Car Seat

Pull the buckle's metal retainer completely through the seat pad and car seat.

continued on next page

4



Check Buckle


Pull up on the buckle to make sure it is secured.
The buckle **MUST NOT** pull out.

Installing Harness Straps

⚠ WARNING

The harness system **MUST** be installed correctly.
DO NOT use a child restraint with damaged harness straps.

1




Pull Out Harness Straps from Behind Seat Pad

Undo the fabric tab fasteners on both the headrest pad and seat pad. Pull the harness straps in front of the seat pad.


Fasten both tabs on the lower backrest pad. Tuck the bottom of the headrest pad behind the lower backrest pad. Tuck in the fabric shoulder panels (see Installing Seat Pad Set on page 47). Fasten both tabs on the headrest.

2




Fully Loosen Harness Straps

3



From Back of Seat, Remove Harness Strap from Splitter Plate


4



Thread Buckle and Chest Clip


The harness strap ends go through the **back** of the buckle tongues and through the chest clip **front to back** as shown.

5



Raise Headrest to Highest Position


6



Make Harness Strap Ends Even


The sewn end of the harness strap loops **MUST** face toward you.

7




Thread Harness Straps into Shoulder Harness Slots

8



From Back of Car Seat, Harness Straps Go Over Metal Bar
DO NOT twist the harness straps.

9



Attach Harness Strap Loops to Splitter Plate As Shown

The sewn ends of the harness strap loops **MUST** face towards you.

DO NOT twist the harness strap or the harness adjustment strap.

Make sure the harness strap loops are fitted **completely on** both sides of the splitter plate.


i

Check your child's fit often.

To learn how to check harness tightness, see pages 27–29.

If you cannot achieve a snug harness fit for your child, see pages 42–43.


Check the harness straps often for any wear or damage.

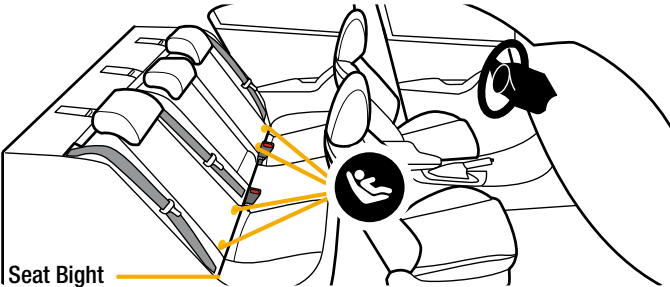


Your vehicle's features may be considerably different than those pictured here.

The lower anchors of **LATCH** (Lower Anchors and Tethers for Children) is a universal system for installing car seats without using vehicle seat belts. The LATCH: lower anchor belt can **ONLY** be used in vehicles that have the lower anchor bars installed in designated seating positions. Most vehicles manufactured after September 2002 are equipped with LATCH: lower anchor bars. Check your vehicle owner's manual to see which seating positions may be equipped with LATCH: lower anchor bars.

Lower Anchor Belt Storage Location




Lower Anchor Belt Parts



To Remove Lower Anchor Belt from Storage Location on Car Seat

Squeeze the spring lever on the hooks and remove the hooks from the attachments in the storage location.

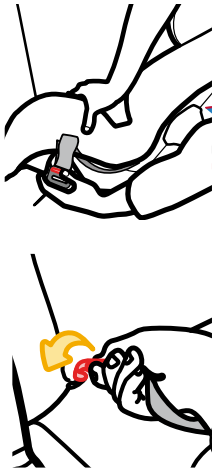


To Remove Lower Anchor Belt from Vehicle's Lower Anchor Bars

1. Remove the tension from the belt by pushing down on the side of the car seat with the adjuster.
2. Then press the adjuster's button to loosen the belt.
3. Squeeze the spring lever on the hooks, push the hooks back into the vehicle seat, and rotate the hooks to the side.
4. Pull the hooks out of the vehicle seat.

To Store Lower Anchor Belt

The lower anchor belt **MUST** be properly stored in its storage location when:


- Using the vehicle belts to install the car seat; **OR**
- Using the **Booster Seat Mode**; **OR**
- The car seat is not installed in a vehicle.



Secure the hooks to the attachments in the storage location as shown. Gently tighten the belt to remove slack.

⚠ WARNING

DO NOT use both the lower anchor belt and vehicle belt at the same time.

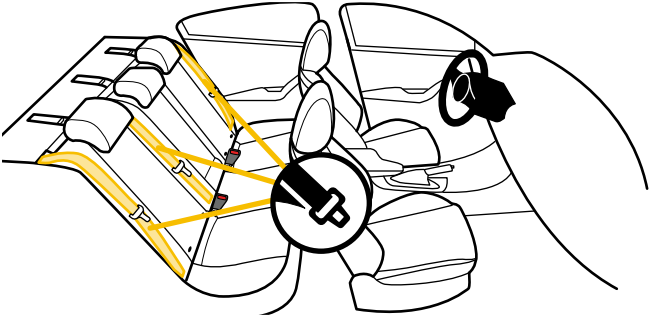


Your vehicle's features may be considerably different than those pictured here.

If LATCH: lower anchors are not an option or if your child weighs more than **55 lb** (24.9 kg), you **MUST** use the vehicle seat belt system to install the car seat.

Not all vehicle belts and seating positions will work with car seats. Please go through the following steps to understand how to lock a car seat in **Rear-Facing Mode** or **Forward-Facing Mode** with a vehicle belt.

1



You **MUST** Review Your Vehicle Owner's Manual

Review your vehicle owner's manual to determine the type of vehicle belts in your car and the seating positions available for installing a car seat.

2




Check How This Car Seat Will Be Locked Into Place

The vehicle belt **MUST NOT** loosen after tightening. This requires locking it by using either:

- The vehicle belt's retractor (see step 3); **OR**
- The vehicle seat belt's latch plate (see step 4).

3



Check Retractor

Retractors pull vehicle belts into stored positions and lock the belt to hold passengers in place.

See the next page for some common types of vehicle belt retractors that will work with this car seat.

Types of Retractors



Switchable Retractor (most vehicles have this type)

This retractor can be switched to a locking mode.

You **MUST have the retractor in the locking mode** to use the seat belt with this car seat.

Switching to locking mode: Slowly pull the shoulder belt all the way out, then let it go back in **1–2 in.** (2.5–5 cm).

As it goes back in, you will most likely hear a ratcheting sound.

Gently pull the belt to see if it has locked. You will not be able to pull any more belt out if the lock has engaged.



Automatic Locking Retractor

This retractor always locks.

It will automatically lock after slowly pulling the seat belt out at least halfway and letting the belt go back into the retractor **1–2 in.** (2.5–5 cm).



Emergency Locking Retractor See Step 4 Check Latch Plates

If the retractor does not lock, it is most likely an Emergency Locking Retractor. These retractors only lock during a sudden stop or collision.

You will need to determine if your vehicle belt's latch plate can lock the belt. See step 4, Check Latch Plates.

4



Locking
Latch
Plate



Sliding Latch
Plate

Check Latch Plates

Latch plates are the part of the vehicle belt that goes into the buckle.

To see if the latch plate locks:

1. Buckle vehicle belt.
2. Slowly pull up on the lap portion of the vehicle belt.

If the vehicle belt does not slide through the latch plate, it's locked.

If the vehicle belt slides through the latch plate, it is a **sliding latch plate**.

Sliding latch plates easily slip between the lap and shoulder portions of the belt.




If you have an Emergency Locking Retractor with a Sliding Latch Plate, you **MUST** use a locking clip.

Please contact us for one, see the back cover of the manual.

Never Use the Following With This Car Seat:


- Emergency Locking Retractor Lap Only Belt
- Inflatable Seat Belts

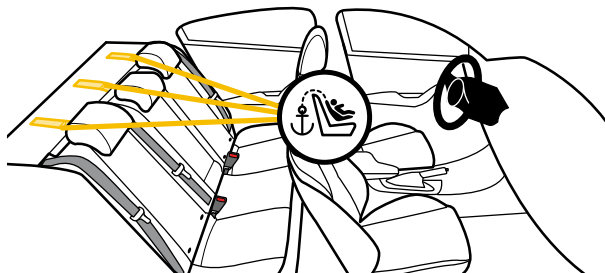

Your vehicle's features may be considerably different than those pictured here.

When anchors are available, you **MUST always attach, adjust, and secure the tether (top anchorage) strap** when installing the car seat in the **Forward-Facing Mode** with internal harness. Tethers improve the installation and stability of car seats and reduce the risk of injury. Attach the tether hook to the tether anchor designated by your vehicle manufacturer for that seating position. Check your vehicle owner's manual for more information. If the seating position does not have a tether anchor, use a different seating position or see your dealer or a qualified mechanic and have one installed.

Storing Top Tether Strap



The tether strap **MUST** be properly stored in its storage location when:

- installing in **Rear-Facing Mode**; **OR**
- using the **Booster Seat Mode**; **OR**
- the car seat is not installed in a vehicle.

Turn tether hook/adjuster around so curved part of hook is facing away from car seat and attach to storage location.

Gently tighten to remove slack.

⚠ WARNING

Using this child restraint without the tether strap anchored as required by the manufacturer would be a misuse of the child restraint and, in a sudden stop or crash, could result in serious injury or death. Serious injury can include paralysis and/or permanent brain injury.

DO NOT fasten multiple tether hooks on the same tether anchor in the vehicle.

⚠ WARNING

NEVER take your child out of the child restraint while the vehicle is moving.

NEVER leave your child unattended.

Placing your child in a hot child restraint may result in burns.

DO NOT use a child restraint with damaged or missing parts.

DO NOT use a child restraint with cut, frayed, or damaged harnesses.

DO NOT substitute parts or try to modify the child restraint in any way. **DO NOT** lubricate buckles and fasteners.

DO NOT use any child restraint accessory except those approved by Dorel Juvenile Group.

NEVER allow any child to play with this child restraint; it is not a toy.

DO NOT remove or cover up any of the warning labels or other labels on the child restraint.

This child restraint has been certified for use in passenger vehicles. **DO NOT** use in a boat, on a motorcycle, or in a cargo van or bus where there are no seat belts or tether anchors.

Read all instructions for additional warnings.

⚠ WARNING



NEVER place a child rear-facing in a seating position with an active frontal air bag.



Check the vehicle owner's manual for more information about air bag/child restraint use.



Use the child restraint only on vehicle seats that face forward.

DO NOT use on seats that face the sides or rear of the vehicle.

For vehicles without a back seat, refer to your vehicle owner's manual.



According to accident statistics, children are safer when properly restrained in the rear seating

positions than in the front seating positions.

Rear seating positions are statistically safer, whether you have air bags, advanced air bags, or no air bags at all.

If you are not sure where to place the car seat in your vehicle:

- Consult your vehicle owner's manual; **OR**
- Contact Dorel Juvenile Group Consumer Care Department; **OR**
- Visit your local Child Passenger Inspection Station. Go to <https://www.nhtsa.gov/vehicle-safety/car-seats-and-boosters-seats> to find your closest station.

To avoid your child being seriously burned, take the following precautions:

- Park in the shade or where the sun does not directly hit the car seat.
- Cover the car seat with a sheet or blanket when not in use.
- Check for hot seat and buckles before placing child in car seat.

To help protect your vehicle seat's upholstery from damage: you may use an accessory approved by Dorel Juvenile Group or a single layer towel underneath and behind car seat.

⚠ WARNING

Check the vehicle belt or lower anchor belt before each use. Use only if the belt can be tightened properly and locked securely in place.

Even when unoccupied, this child restraint **MUST** be firmly secured to the vehicle with the lower anchor belt or with the vehicle seat belt.

Even when unoccupied, this booster seat **MUST** be firmly secured to the vehicle with the vehicle seat belt.

In a crash or sudden stop, an unsecured child restraint or booster seat could injure occupants.

DO NOT risk your child’s safety.

To keep your child as safe as possible, Dorel Juvenile Group strongly recommends replacing the car seat even after a minor crash; even if it was not occupied at the time.

Replacement After a Minor Crash

The National Highway Traffic Safety Administration states that for a crash to be considered minor **ALL of the following MUST be true:**

- Vehicle able to drive away from the crash site; **AND**
- Vehicle door nearest the car seat was not damaged; **AND**
- No passengers were injured; **AND**
- Airbags did not deploy; **AND**
- There is no visible damage to the car seat.

If the crash your car seat was involved in meets **ALL** the criteria, you may not need to replace the car seat.

If one or more of these criteria are not true or if you are uncertain of any of your answers, replace the car seat immediately.

Replacement After a Moderate to Severe Crash

You **MUST** replace this car seat if it has been in a moderate to severe car crash.

This car seat is intended to protect a child in a single crash. During a crash, the car seat and all of its parts absorb crash energy which can deform or weaken it. Damage is not always visible. A damaged car seat **MUST** be replaced immediately.

Expiration

On the side of the car seat there is a date of manufacture label as shown.

DO NOT use this car seat more than 10 years after the date of manufacture.



0515079 *Tear Off and Mail This Part or Register Online* 4348-0081D

Consumer: Just fill in your name, address and email. Please print (use dark ink).

Your Name

Your Street Address

City State Zip Code

Email Address (optional)

Model Number
AB123CDE

Model Name
BRAND CARSEAT

Manufacture Date
2024/01/02

Example of model number, manufacture date, and line code.



If you don't have the card or if your address changes, you will find the model number, manufacture date, and line code on the label located on the side of the car seat.

Please complete the postage-paid registration card that came with your child restraint, and send it to us.

Child restraints could be recalled for safety reasons.

You must register this restraint to be reached in a recall.

Send your name, address, e-mail address if available and the restraint's model number and manufacturing date to:

Dorel Juvenile Group
P.O. Box 2609
Columbus, IN 47202
or call 1-800-544-1108 or register online at
www.djgusa.com/registration/carseat/us.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to www.NHTSA.gov.



This restraint is certified for aircraft use when used with the internal harness.

Install the car seat in a window seat to avoid blocking the aisle. If the aircraft lap belt is too short, ask the flight attendant for a belt extender.



Use only on forward-facing aircraft seats. Contact the airline for their specific policies.

Some airlines may ask to see a label stating that this car seat is certified for aircraft use.

There is an airplane certification label located on the side of this car seat shell as shown.

⚠ WARNING

You **MUST** store the lower anchor belt and tether strap when installing with aircraft belts.



Rear-Facing Aircraft Installation

Follow the vehicle belt install steps on pages 10–15.



Forward-Facing Aircraft Installation

Follow the vehicle belt install steps on pages 20–26, skipping the tether strap steps.



Booster Seat

This restraint is not certified for aircraft use, when used as a booster seat, because aircraft seats do not have shoulder belts.

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows: This product is warranted against defective materials or workmanship for one year from the date of original purchase.

An original receipt is required to validate your warranty.

DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty, please contact our Consumer Care Department by phone: 1-800-544-1108 or text: 1-812-652-2525. Our hours of operation are from 8:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 8:00 a.m. to 4:30 p.m. on Friday.

Proof of purchase is required and shipping charges are the responsibility of the consumer.

Warranty Limitations: This warranty does not include damages which arise from misuse or abuse of this product.

Limitation of Damages: The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

Limitation of warranties and other warranty terms and state law rights: Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty.

Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state.

Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product.