



EMCORE

BY EMSER TILE™

LUXURY VINYL TILE COLLECTION™



12 MIL


Emcore™ is a 5MM SPC product with a 12 mil wear layer. This collection of vinyl plank products is appropriate for any interior flooring application. Emcore™ is a solid-core construction, waterproof material that is stain-, scratch- and dent-resistant. It is offered with 15 different graphic faces and a Uniclic® Locking System that provides the realistic look of wood with easier installation and maintenance.

Monarch™

Stuart | 7x48



Lancaster | 7x48

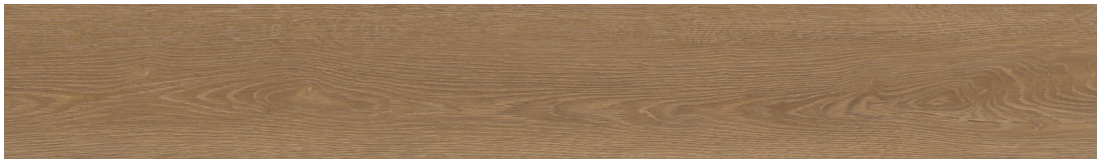

Tudor | 7x48



Viceroy™

Almanza | 7x48



Cordoba | 7x48



Marquina | 7x48



Trim

Reducer



T-Moulding



End Cap



Stair Nose Flush



PRODUCT INFO	Thickness	5mm	TESTING RESULTS	Squareness ASTM F2421	PASS	Resistance to Bacteria ASTM G21	O - PASS	Stain Resistance ASTM E423	NOT AFFECTED
	Wear Layer	12mil		Dimensional Tolerances ISO 24337	PASS	Castor Chair Resistance ANSI LF-01	PASS (25,000 CYCLES)	Heavy Metals ASTM F963-16	FREE - PASS
	Solid Core	3.2mm		Dimensional Stability ASTM F2199	PASS	Heat Stability ASTM F1514	PASS (<2MM)	Emissions Testing CDHP/CAL 1350	PASS (Og/L)
	Underlayment	1.5mm IXPE Pad		Slip Resistance DIN 51130	R10	Resistance to Chemicals ASTM F925	PASS	VOC Requirements ASTM D5116	PASS (Og/L)
	Click System	Uniclic® (Short & Long)		Residual Indentation ASTM F1914	PASS (0.001")	Smoke Density ASTM E662	<450		
	UV Coating	Yes		Deep Abrasion ASTM D4060	25,000 CYCLES	Impact Sound Reductions ASTM E2179	Δ IIC 55 dB		
	Water Resistant	Yes							
	Warranty	35 Year Limited Residential Wear Warranty 5 Year Limited Commercial Wear Warranty							

The Emcore™ collection by Emser Tile™ contains no phthalates or heavy metal and is 100% virgin vinyl.
The wear layer on all products is comprised of a ceramic bead coating. Requires expansion joints every 10 meters x 10 meters.

20 MIL

Emcore™ is a 5MM SPC product with a 20 mil wear layer. This collection of vinyl plank products is appropriate for any interior flooring application. Emcore™ is a solid-core construction, waterproof material that is stain-, scratch- and dent-resistant. It is offered with 15 different graphic faces and a Uniclic® Locking System that provides the realistic look of wood with easier installation and maintenance.

Oxford™

Hermosa | 7x48



Brea | 7x48



Ojai | 7x48




Windsor™


Barstow | 7x48



Solvang | 7x48

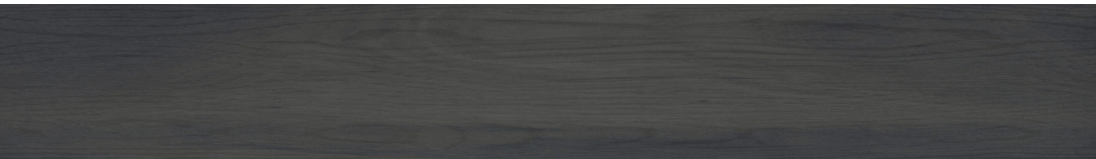

Malibu | 7x48

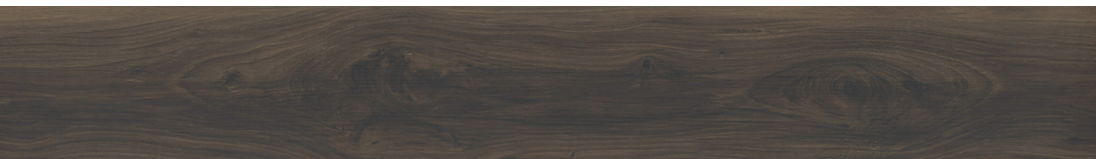

Trim

Reducer



T-Moulding



End Cap



Stair Nose Flush



PRODUCT INFO	Thickness	5mm	TESTING RESULTS	Squareness ASTM F2421	PASS	Resistance to Bacteria ASTM G21	O - PASS	Stain Resistance ASTM E423	NOT AFFECTED
	Wear Layer	20mil		Dimensional Tolerances ISO 24337	PASS	Castor Chair Resistance ANSI LF-01	PASS (25,000 CYCLES)	Heavy Metals ASTM F963-16	FREE - PASS
	Solid Core	3.0mm		Dimensional Stability ASTM F2199	PASS	Heat Stability ASTM F1514	PASS (<2MM)	Emissions Testing CDHP/CAL 1350	PASS (Og/L)
	Underlayment	1.5mm IXPE Pad		Slip Resistance DIN 51130	R 10	Resistance to Chemicals ASTM F925	PASS	VOC Requirements ASTM D5116	PASS (Og/L)
	Click System	Uniclic® (Short & Long)		Residual Indentation ASTM F1914	PASS (0.001")	Smoke Density ASTM E662	<450		
	UV Coating	Yes		Deep Abrasion ASTM D4060	25,000 CYCLES	Impact Sound Reductions ASTM E2179	Δ IIC 55 dB		
	Water Resistant	Yes							
	Warranty	35 Year Limited Residential Wear Warranty							
		5 Year Limited Commercial Wear Warranty							

The Emcore™ collection by Emser Tile™ contains no phthalates or heavy metal and is 100% virgin vinyl.
The wear layer on all products is comprised of a ceramic bead coating. Requires expansion joints every 10 meters x 10 meters.

EMCORE

BY EMSER TILE™

TILE LOOKS

Hylton™



Gray | 12x24



Ivory | 12x24

Leeds™



Cream | 12x24



Gray | 12x24

12 MIL

Emcore™ is a 5MM SPC product with a 12 mil wear layer. This collection of vinyl products is appropriate for any interior flooring application. Emcore™ is a solid-core construction, waterproof material that is stain-, scratch- and dent-resistant. It is offered with 15 different graphic faces and a Uniclic® Locking System that provides the realistic look of tile with easier installation.

Reign™



Milk | 12x24



White | 12x24



Trim

T-Moulding



End Cap



PRODUCT INFO	Thickness	5mm	TESTING RESULTS	Squareness ASTM F2421	PASS	Resistance to Bacteria ASTM G21	O - PASS	Stain Resistance ASTM E423	NOT AFFECTED
	Wear Layer	12mil		Dimensional Tolerances ISO 24337	PASS	Castor Chair Resistance ANSI LF-01	PASS (25,000 CYCLES)	Heavy Metals ASTM F963-16	FREE - PASS
	Solid Core	3.7mm		Dimensional Stability ASTM F2199	PASS	Heat Stability ASTM F1514	PASS (<2MM)	Emissions Testing CDHP/CAL 1350	PASS (Og/L)
	Underlayment	1 mm IXPE Pad		Slip Resistance DIN 51130	R 10	Resistance to Chemicals ASTM F925	PASS	VOC Requirements ASTM D5116	PASS (Og/L)
	Click System	Uniclic® (Short & Long)		Residual Indentation ASTM F1914	PASS (0.001")	Smoke Density ASTM E662	<450		
	UV Coating	Yes		Deep Abrasion ASTM D4060	25,000 CYCLES	Impact Sound Reductions ASTM E2179	Δ IIC 55 dB		
	Water Resistant	Yes							
	Warranty	35 Year Limited Residential Wear Warranty							
		5 Year Limited Commercial Wear Warranty							

The Emcore™ collection by Emser Tile™ contains no phthalates or heavy metal and is 100% virgin vinyl.
The wear layer on all products is comprised of a ceramic bead coating. Requires expansion joints every 10 meters x 10 meters.

UNICLIC® LOCKING SYSTEM



Monarch™ Tudor