


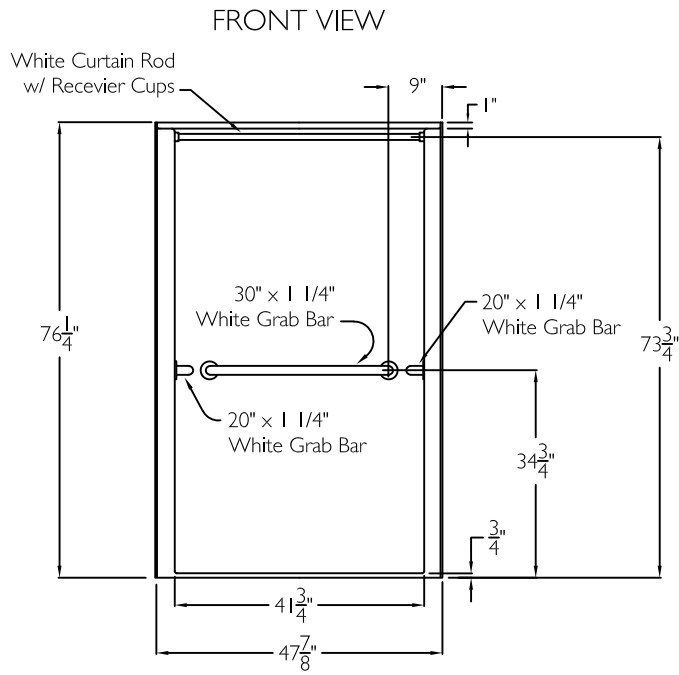

SPECIFICATION SHEET

This shower enclosure shall be model XSS 4897 BF .75, center, Finished surface shall be of a sanitary grade AcrylX™ applied acrylic.


Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 47 7/8 x 37" x 76 1/4".
The unit shall meet CSA B45.5-11 and IAPMOZ124.1.2.


HANDED BY THE CENTER

The enclosure shall be equipped with the following accessories:
1) One 30" x 1 1/4" diameter white horizontal grab bar on the back wall, 2) Two 20" x 1 1/4" diameter white horizontal grab bar, one on each side wall, all with 1 1/2" statute clearance, mounted with stainless steel bolts, and secured from the rear with 3" x 3" x 11 gauge metal mounting plate, 3) One inch diameter, 18 gauge white curtain rod with receiver cups, 4) Factory installed Armor Core Easy Base, 5) 3/4" threshold.


SIDE VIEW

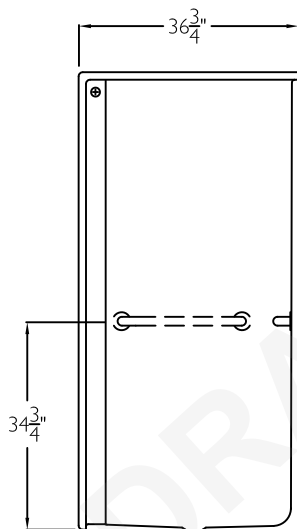

TOP VIEW

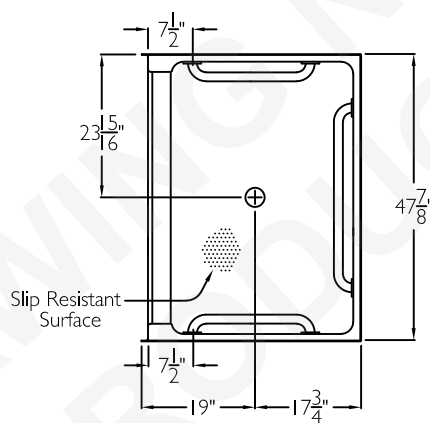

CROSS SECTION OF THEREHOLD.

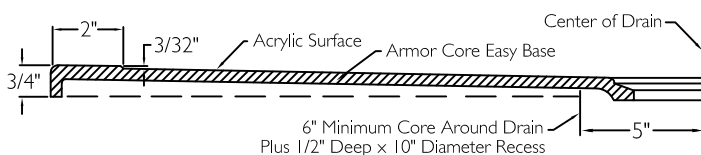

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 47 7/8" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name	Date	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. XSS 4897 BF .75-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect		Drawing No. XSS 4897 BF .75 WHBW WHSW2 WCR Easy Base	
	Engineer		Date Issued. 4-3-12	Drawing Rev. 7-6-20
	Rep		Material. AcrylX™ applied acrylic	
	Wholesaler		Color.	
			Dimensions are in inches. Due to the nature of the materials dimensions may vary ± 1/2"	