
SPECIFICATION SHEET
TD-XXXX Rectangular, 3-wire Floating Point Motorized Zone Control Dampers

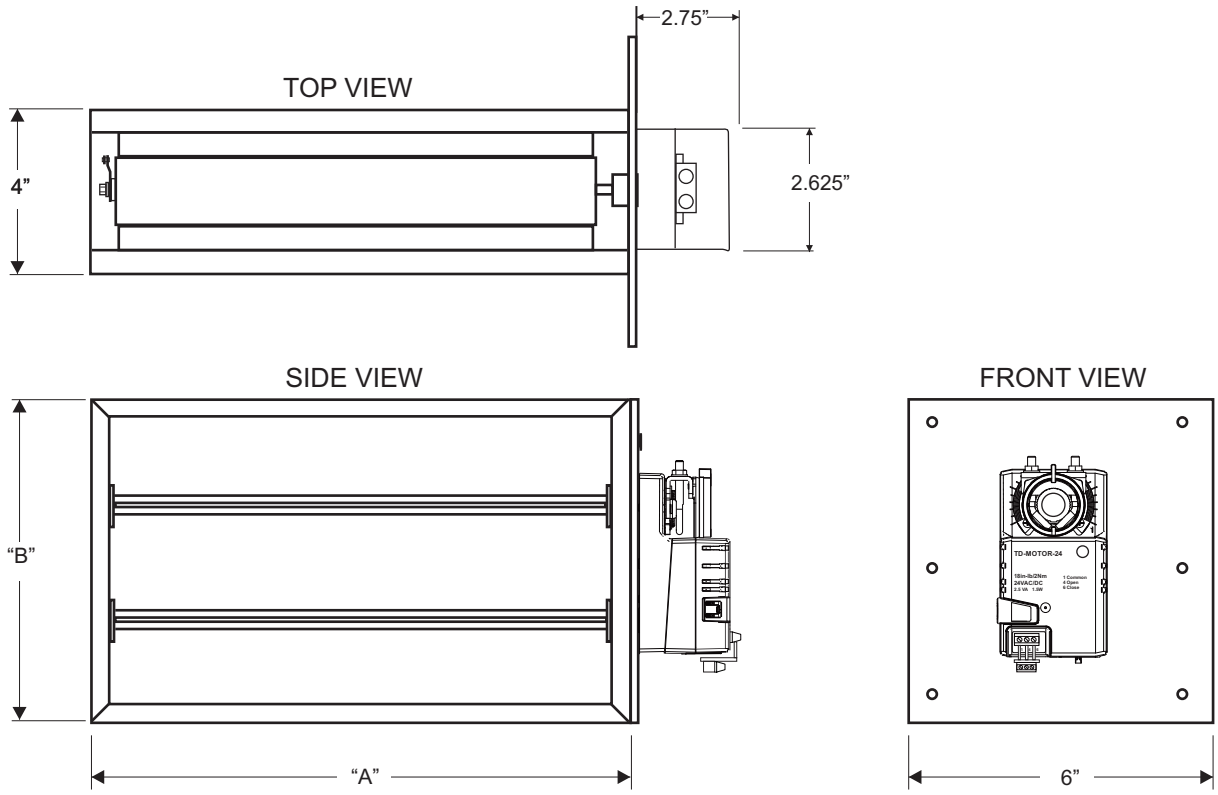

SPECIFICATIONS

DIMENSIONS:

Damper models TD-XXXX are sized width (A) by height (B) with actuator on the (B) dimension.
Bottom mount models TD-XXXX-BM are sized width (A) by height (B) with actuator on the (A) dimension.
Actual (A) and (B) dimensions are undercut 1/4”.
Standard sizes range from 8” x 8” up to 36” x 24” in 2” increments.

APPLICATION:

Compatible with Trane® and American Standard® communicating zone control systems, including Link™ and legacy ComfortLink™ and AccuLink™ systems.

CONSTRUCTION:

1/16” extruded aluminum frame
1/16” extruded aluminum parallel blades
Bronze bushings
Minimum position adjustment

ELECTRICAL:

24Volt, 2.5 VA
LED position indication
3-Wire
60 second timing
18 lb.-in.

Drawings are intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale.
iO HVAC Controls reserves the right to make product changes without notification or obligation.

iO HVAC CONTROLS
Indianapolis, IN 46237

www.iohvaccontrols.com
For Technical Support Call Toll Free: 866-225-5032
iO-08-1296-101426